

5 Port Solenoid Valve

SQ1000/2000 Series

Metal Seal

Rubber Seal

Power Saving

Standard

0.4w

Compared to current model

60% DOWN ↓


CE
[Option]

High pressure 0.95w

(1 MPa Metal seal)


Easy Replacement of Clip Type One-touch Fittings

One-touch fittings can be replaced without removing valves.



Connector Entry Direction Can be Changed with a Single Push.

The connector entry direction can be changed from the top to the side by simply pressing the manual release button. It is not necessary to use the manual release button when switching from the side to the top.




4 Position Dual 3 Port Valve

- Two 3-port valves built into one body.
- The 3-port valves on the A and B sides can operate independently.
- When used as 3-port valves, only half the number of stations is required.
- Can also be used as a 4-position, 5-port valve.

Built-in Back Pressure Check Valve (Option symbol: B)


Eliminates trouble with back pressure when driving a single acting cylinder or when using an exhaust center type valve, etc.

Easy valve maintenance
Mountable with one screw.

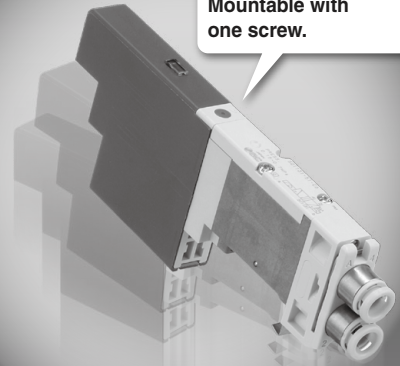


Easy to add or decrease the number of valve stations.

The use of cassette type valves and manifolds makes it easy to increase or decrease the number of stations on a DIN rail. The plug-in type includes two extra valve station connectors. This design makes rewiring unnecessary during manifold expansion.

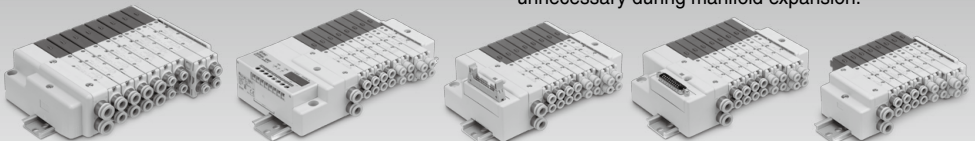

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000/2000 Series

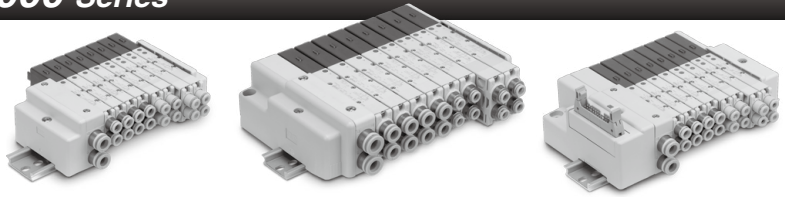


Wiring Type

| Manifold variations | EX510 Gateway-type serial transmission system | D-sub connector kit | Flat ribbon cable connector kit | Terminal block box kit | Lead wire kit | |
|---------------------|---|---------------------|---------------------------------|------------------------|---------------|--|
| | | F kit | P kit | T kit | L kit | |
| | | | | | | |
| Plug-in Unit | SQ1000 (P.762) | (P.766, 772) | (P.766, 774) | — | (P.766, 778) | |
| | SQ2000 (P.782) | (P.786, 792) | (P.786, 794) | (P.786, 798) | (P.786, 800) | |
| Plug Lead Unit | SQ1000 — | (P.828, 834) | (P.828, 836) | — | — | |
| | SQ2000 — | (P.842, 848) | (P.842, 850) | — | — | |

Piping Specifications

| 1(P), 3(R) | 4(A), 2(B) |
|--|--|
| <p>○Supply/Exhaust port</p> <p>SQ1000 One-touch fittings for $\phi 8$</p> <p>SQ2000 One-touch fittings for $\phi 10$</p> | <p>○Cylinder port</p> <p>Side ported</p> <p>SQ1000 One-touch fittings for $\phi 3.2$ One-touch fittings for $\phi 4$ One-touch fittings for $\phi 6$ M5</p> <p>SQ2000 One-touch fittings for $\phi 4$ One-touch fittings for $\phi 6$ One-touch fittings for $\phi 8$</p> <p>Top ported</p> <p>Top porting can be changed to side porting.</p> |

Metal Seal/Rubber Seal 5 Port Solenoid Valve

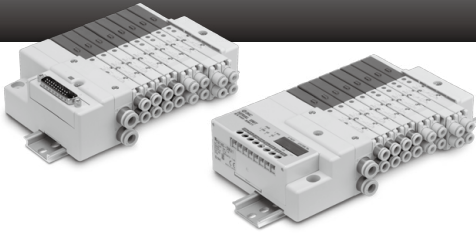

Contents

■ Plug-in Unit








| | |
|---|-------|
| Valve Specifications | P.770 |
| Manifold Specifications | P.771 |
| Manifold Option Parts | P.803 |
| How to Increase Manifold Stations | P.817 |
| Construction | P.822 |
| Manifold Exploded View: SQ1000 | P.824 |
| Manifold Spare Parts: SQ1000 | P.825 |
| Manifold Exploded View: SQ2000 | P.826 |
| Manifold Spare Parts: SQ2000 | P.827 |

■ Plug Lead Unit

| | |
|---|-------|
| Valve Specifications | P.832 |
| Manifold Specifications | P.833 |
| Manifold Option Parts | P.856 |
| How to Increase Manifold Stations | P.869 |
| Construction | P.874 |
| Manifold Exploded View: SQ1000 | P.876 |
| Manifold Spare Parts: SQ1000 | P.877 |
| Manifold Exploded View: SQ2000 | P.878 |
| Manifold Spare Parts: SQ2000 | P.879 |

| | |
|------------------------------------|-------|
| Specific Product Precautions | P.880 |
|------------------------------------|-------|


| |
|----------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

| | Serial transmission kit | Connector kit | Manifold options |
|---|--|---|--------------------|
| | S kit | C kit | |
|  |  |  | |
|  | (P.766, 780) | — | P.768 |
|  | (P.786, 802) | — | P.788 |
| — | — |  | (P.828, 840) P.830 |
| — | — |  | (P.842, 854) P.844 |


Cylinder Speed Chart

Use as a guide for selection. Please confirm the actual conditions with SMC Sizing Program.

SQ1000 series

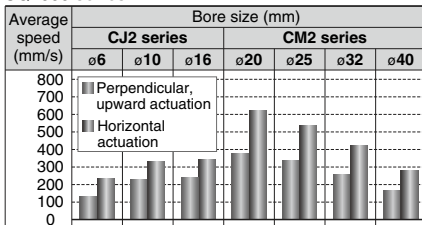

SQ2000 series

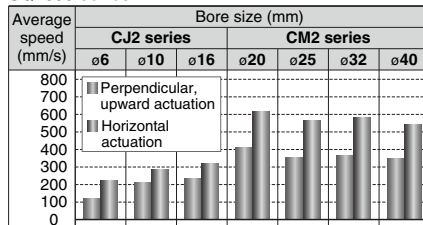

- * It is when the cylinder is extending that is meter-out controlled by speed controller which is directly connected with cylinder, and its needle valve with being fully open.
- * The average velocity of the cylinder is what the stroke is divided by the total stroke time.
- * Load factor: ((Load mass x 9.8) / Theoretical force) x 100%

Conditions

| | Base mounted | CJ2 series | CM2 series | MB, CA2 series |
|---------------|------------------|-------------|-------------|----------------|
| SQ1000 | Tube x Length | | T0604 x 1 m | |
| | Speed controller | | AS3002F-06 | |
| | Silencer | | AN110-01 | |
| SQ2000 | Tube x Length | T0604 x 1 m | T1075 x 1 m | T1209 x 1 m |
| | Speed controller | AS3002F-06 | | AS4002F-10 |
| | Silencer | | AN20-02 | |

EX510 Gateway-type Serial Transmission System Plug-in Unit

SQ1000 Series



How to Order Manifold

SS5Q 1 3 - SB **08** - **D** - -

Manifold series

| | |
|---|--------|
| 1 | SQ1000 |
|---|--------|

SI unit output polarity

| | |
|-----|-----------------|
| Nil | Positive common |
| N | Negative common |

Valve stations

| Symbol | Stations | Note |
|--------|------------|---------------|
| 01 | 1 station | Double Wiring |
| ⋮ | ⋮ | |
| 08 | 8 stations | |

Note) Max. 16 stations
(Special wiring specifications)

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

1(P), 3(R) port size

| | |
|-----|--|
| Nil | 1(P), 3(R) port, One-touch fittings for ø8 |
| 00T | 1(P), 3(R) port, One-touch fittings for ø5/16" |

Option

| Nil | None |
|--------------|--|
| 02 to 16 (1) | DIN rail length specified |
| B (2)(3) | Back pressure check valve |
| K (4) | Special wiring specifications (Except double wiring) |
| N | With name plate (Side ported only) |
| R | External pilot specifications |
| S | Built-in silencer, direct exhaust |

How to Order Manifold Assembly

Example

SS5Q13-SB08-D 1 set (SB kit 8-station manifold base part no.)
SQ1130-51-C6 4 sets (Single type part no.)
SQ1230D-51-C6 3 sets (Double type part no.)
SSQ1000-10A-3 1 set (Blanking plate part no.)

→ The asterisk denotes the symbol for assembly.
 Prefix it to the part nos. of the solenoid valve, etc.
 → Enter in order starting from the first station on the D side.

- Note 1) Specify DIN rail length with "D□" at the end.
(Enter the number of stations inside □.)
The number of stations that may be displayed is longer than the manifold number of stations.
Example: -D09
- Note 2) When "-B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification.
("B" is not necessary)
- Note 3) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.
- Note 4) Specify "-K" for wiring specification for cases below.
 - All single wiring
 - Single and double mixed wiring
 - When there are stations which do not require wiring (e.g. single SUP spacer), specify the wiring specification in the manifold specification so that the number of the solenoids is 16 maximum. (Standard wiring specification is double wiring)
- Note 5) For specifying two or more options, enter them alphabetically.
 Example: -BKN
 * Refer to pages 803 to 807 and 813 to 815 for manifold option parts.

DIN rail mounting

SI Unit Part No.

| Symbol | SI Unit Specifications | SI unit part no. | Page |
|--------|------------------------|------------------|----------------------------------|
| Nil | Positive common (NPN) | EX510-S002B | Best Pneumatics No. 1-1 P.897 |
| N | Negative common (PNP) | EX510-S102B | |

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System. Please download it via our website, <http://www.smcworld.com>



How to Order Valves

SQ 1 1 3 0 - **5** - **1** - **C6** - - -

Series

| | |
|---|--------|
| 1 | SQ1000 |
|---|--------|

Seal

| | |
|---|-------------|
| 0 | Metal seal |
| 1 | Rubber seal |

Type of actuation

| | |
|---|---|
| 1 | 2 position single (A)4 2(B) (R1)5 1 3(R2) (P) |
| | 2 position double (Double solenoid) ⁽¹⁾ (A)4 2(B) (A)4 2(B) (R1)5 1 3(R2) (R1)5 1 3(R2) (P) (P) Metal seal Rubber seal |
| 2 | 3 position closed center (A)4 2(B) (R1)5 1 3(R2) (P) |
| | 3 position exhaust center (A)4 2(B) (R1)5 1 3(R2) (P) |
| 3 | 3 position pressure center (A)4 2(B) (R1)5 1 3(R2) (P) |
| | 4 position dual 3 port valve 4(A) 2(B) 1(P) 3(R) |
| 4 | 4 position dual 3 port valve 4(A) 2(B) 1(P) 3(R) |
| | 4 position dual 3 port valve 4(A) 2(B) 1(P) 3(R) |

Note 1) For double solenoid specification, the function symbol below is "D".

Note 2) Only rubber seal types are applicable.

Function

| Symbol | Specifications |
|--------------|---|
| N (l) | Standard type (0.4 W) |
| B (5) | Quick response type (0.95 W) |
| D (1) | 2 position double (Double solenoid specifications) |
| K (5) | High pressure type (1 MPa, 0.95 W) [Applicable to metal seal only] |
| N (2) | Negative common |
| R (3) | External pilot specifications |

CE-compliant

| | |
|-------------|--------------|
| N il | — |
| Q | CE-compliant |

With/Without manifold block

| N il | M | MB (Note) |
|--|-------------------------|---|
| Without manifold block | With manifold block | With manifold block, built-in back pressure check valve |
| <ul style="list-style-type: none"> When ordering with manifolds When only valves are required. | | For adding stations |

Note) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.

Port plug mounting port

| | |
|-------------|-----------|
| N il | None |
| A | Port 4(A) |
| B | Port 2(B) |

Cylinder port

| Symbol | Port size | Port location | |
|-----------|----------------------------------|---------------------------|--|
| C3 | With One-touch fittings for ø3.2 | Side ported | |
| C4 | With One-touch fittings for ø4 | | |
| C6 | With One-touch fittings for ø6 | | |
| M5 | M5 thread | Top ⁽¹⁾ ported | |
| L3 | With One-touch fittings for ø3.2 | | |
| L4 | With One-touch fittings for ø4 | | |
| L6 | With One-touch fittings for ø6 | | |
| L5 | M5 thread | | |

Note 1) Can be changed to side ported configuration.

Note 2) Refer to page 815 for the inch-size One-touch fittings.

Manual override

| N il | B |
|--|---------------------------------|
| Non-locking push type (Tool required) | Locking type (Tool required) |
| | |

Rated voltage

| | |
|----------|--------|
| 5 | 24 VDC |
|----------|--------|

Note) Light/surge voltage suppressor is built-in.

Note 1) "D" is specified for 2 position double.

Note 2) When SI unit output polarity is negative common, the valve common specification should be also be negative common.

Note 3) Except dual 3 port valves.



Note 4) When two or more symbols are specified, indicate them alphabetically.

Note 5) Function combination of "B" and "K" is not available.

| |
|----------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Dimensions: SQ1000

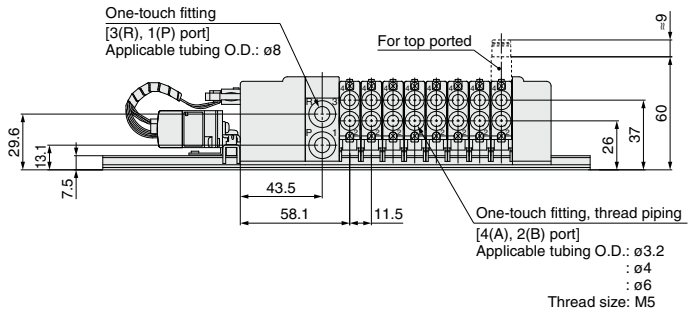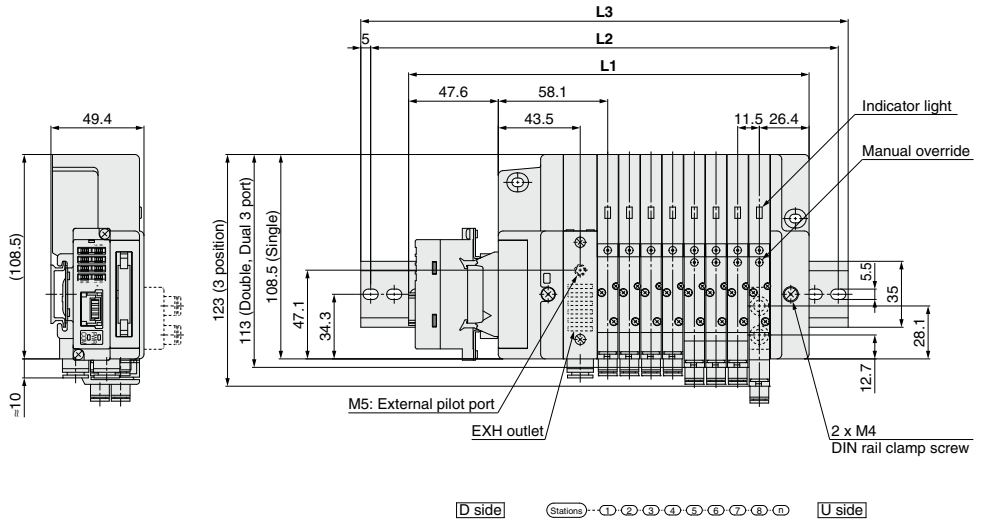

Dimensions

Formula: $L1 = 11.5n + 120.5$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 132 | 143.5 | 155 | 166.5 | 178 | 189.5 | 201 | 212.5 | 224 | 235.5 | 247 | 258.5 | 270 | 281.5 | 293 | 304.5 |
| L2 | | 162.5 | 175 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 312.5 | 312.5 | 325 |
| L3 | | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 323 | 335.5 |

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

Plug-in Unit

SQ1000 Series



How to Order Manifold

SS5Q13-08 FD2-D

Stations

| | |
|-----------|-------------|
| 01 | 1 station |
| ⋮ | ⋮ |
| 24 (Note) | 24 stations |

Note) The maximum number of stations depends on the type of electrical entries. Refer to "Electrical entry" for details.

1(P), 3(R) port size

| | | | |
|-----|--|-----|--------------|
| Nil | 1(P), 3(R) port One-touch fittings for ø8 | Nil | — |
| 00T | 1(P), 3(R) port One-touch fittings for ø5/16" | Q | CE-compliant |

Manifold mounting

| | |
|----------|------------------------|
| D | DIN rail mounting type |
| E (Note) | Direct mounting type |





Note) Refer to page 814 for details.

Option

| | |
|-------------|--|
| Nil | None |
| 02 to 24(1) | DIN rail length specified |
| B(2)(3) | Back pressure check valve |
| K(4) | Special wiring specifications (Except double wiring) |
| N | With name plate (Side ported only) |
| R | External pilot specifications |
| S | Built-in silencer, direct exhaust |

- Note 1) Specify DIN rail length with "D□" at the end. (Enter the number of stations inside□.) The number of stations that may be displayed is longer than the manifold number of stations. Example: -D09
- Note 2) When "B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("B" is not necessary)
- Note 3) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.
- Note 4) Specify "K" for wiring specification for cases below. (Except L kit)
- All single wiring
 - Single and double mixed wiring.
 - When there are stations which do not require wiring (e.g. single SUP spacer), specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)
- Note 5) For specifying two or more options, enter them alphabetically. Example: -BKN
- * Refer to pages 807 and 813 to 815 for manifold option parts.

Electrical entry

| Kit type | Lead wire connector location | Cable/SI unit specifications | Station (Double wiring) | Max. number of solenoids for special wiring specifications(2) | CE-compliant | | |
|---|------------------------------|--------------------------------|---|---|--------------|-----------------|----|
| F kit D-sub connector kit  | D side | FD0 | D-sub connector (25P) kit, without cable | 1 to 12 stations | 24 | | |
| | | FD1 | D-sub connector (25P) kit, with 1.5 m cable | | | | |
| | | FD2 | D-sub connector (25P) kit, with 3.0 m cable | | | | |
| | | FD3 | D-sub connector (25P) kit, with 5.0 m cable | | | | |
| P kit Flat ribbon cable connector kit (26P)  | D side (1) | PD0 | Flat ribbon cable (26P) kit, without cable | 1 to 12 stations | 24 | | |
| | | PD1 | Flat ribbon cable (26P) kit, with 1.5 m cable | | | | |
| | | PD2 | Flat ribbon cable (26P) kit, with 3.0 m cable | | | | |
| | | PD3 | Flat ribbon cable (26P) kit, with 5.0 m cable | | | | |
| | | PDC | Flat ribbon cable (20P) kit, without cable | | | 1 to 9 stations | 18 |
| L kit Note 3) Lead wire kit  | LD0 (N) D side | Lead wire kit with 0.6 m cable | 1 to 12 stations | — | ● | | |
| | LU0 (N) U side | | | | | | |
| | LD1 (N) D side | Lead wire kit with 1.5 m cable | | | | | |
| | LU1 (N) U side | | | | | | |
| | LD2 (N) D side | Lead wire kit with 3.0 m cable | | | | | |
| | LU2 (N) U side | | | | | | |
| S kit Serial transmission kit EX140 Integrated-type (For Output) Serial Transmission System(4)  | D side | SDH | NKE Corp.: Fieldbus H System | 1 to 8 stations | 16 | | |
| | | SDQ | DeviceNet | | | | |
| | | SDR1 | OMRON Corp.: CompoBus/S (16 output points) | | | | |
| | | SDR2 | OMRON Corp.: CompoBus/S (8 output points) | | | 1 to 4 stations | 8 |
| | | SDV | CC-LINK | | | 1 to 8 stations | 16 |

- Note 1) Separately order the 20P type cable assembly for the P kit.
- Note 2) Specify the wiring so that the maximum number of solenoids is not exceeded. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)
- Note 3) When specifying the negative common specifications of the L kit, suffix "N" to the kit symbol. For details, refer to page 778.
- Note 4) Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System. Please download it via our website. <http://www.smcworld.com>
- * Refer to page 825 for manifold spare parts.

SI Unit Part No.

| Symbol | Protocol type | SI unit part no. | Page |
|--------|--|------------------|-------------------------------------|
| SDH | NKE Corp.: Fieldbus H System | EX140-SUH1 | Best Pneumatics No. 1-1 P.784 |
| SDQ | DeviceNet | EX140-SDN1 | |
| SDR1 | OMRON Corp.: CompoBus/S (16 output points) | EX140-SCS1 | |
| SDR2 | OMRON Corp.: CompoBus/S (8 output points) | EX140-SCS2 | |
| SDV | CC-LINK | EX140-SMJ1 | |

How to Order Valves

SQ1 1 3 0 - **5** **1** - **C6** - - -









•CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

• **Seal**




| | |
|---|-------------|
| 0 | Metal seal |
| 1 | Rubber seal |

•Type of actuation

| | |
|---|--|
| 1 | 2 position single (A)4 2(B)  (R1)5 1 3(R2) (P) |
| | 2 position double (Double solenoid) (1) (A)4 2(B) (A)4 2(B)  (R1)5 1 3(R2) (R1)5 1 3(R2) (P) (P) Metal seal Rubber seal |
| 2 | 3 position closed center (A)4 2(B)  (R1)5 1 3(R2) (P) |
| | 3 position exhaust center (A)4 2(B)  (R1)5 1 3(R2) (P) |
| 3 | 3 position pressure center (A)4 2(B)  (R1)5 1 3(R2) (P) |
| | 4 position dual 3 port valve 4(A) 2(B)  1(P) 3(R) |
| 4 | 4 position dual 3 port valve 4(A) 2(B)  1(P) 3(R) |
| | 4 position dual 3 port valve 4(A) 2(B)  1(P) 3(R) |

Note 1) For double solenoid specification, the function symbol below is "D".
Note 2) Only rubber seal types are applicable.

•With/Without manifold block



| Nil | M | MB (Note) |
|---|--|---|
| Without manifold block  | With manifold block  | With manifold block, built-in back pressure check valve  |
| • When ordering with manifolds • When only valves are required. | | * Lead wire is not included. * Lead wire is not included. |
| For adding stations | | |

Note) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.

•Port plug mounting port



| | |
|-----|-----------|
| Nil | None |
| A | Port 4(A) |
| B | Port 2(B) |

•Cylinder port

| Symbol | Port size | Port location | |
|--------|----------------------------------|----------------|---|
| C3 | With One-touch fittings for ø3.2 | Side ported |  |
| C4 | With One-touch fittings for ø4 | | |
| C6 | With One-touch fittings for ø6 | | |
| M5 | M5 thread | Top (1) ported |  |
| L3 | With One-touch fittings for ø3.2 | | |
| L4 | With One-touch fittings for ø4 | | |
| L6 | With One-touch fittings for ø6 | | |
| L5 | M5 thread | | |

Note 1) Can be changed to side ported configuration.
Note 2) Refer to page 815 for the inch-size One-touch fittings.

•Manual override

| Nil | B |
|---|--|
| Non-locking push type (Tool required) | Locking type (Tool required) |
|  |  |

•Rated voltage

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Note 1) Light/surge voltage suppressor is built-in.
Note 2) S kit: 24 VDC only

•Function
















| Symbol | Specifications |
|--------|---|
| Nil | Standard type (0.4 W) |
| B(5) | Quick response type (0.95 W) |
| D(1) | 2 position double (Double solenoid specifications) |
| K(5) | High pressure type (1 MPa, 0.95 W) [Applicable to metal seal only] |
| N(2) | Negative common |
| R(3) | External pilot specifications |

Note 1) "D" is specified for 2 position double.
Note 2) For L kit, when the manifold specifies negative common, the valve common should also be negative. The combination of negative common of the valve cannot be specified with S kit (EX140).
Note 3) Except dual 3 port valves.
Note 4) When two or more symbols are specified, indicate them alphabetically.
Note 5) Function combination of "B" and "K" is not available.

- SQ**
- SZ**
- VF**
- VP4**
- VQ 1/2**
- VQ 4/5**
- VQC 1/2**
- VQC 4/5**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**


SQ1000 Series

Manifold Options

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|--|---|--------------|-----------|-------------|--|------------|--------------|--|------------|-------------|--|------------|--------------|--|------------|-------------|--|------------|--------------|--|------------|-------------|--|------------|--------------|--|--|-------------|--|--|--------------|--|--|-------------|--|--|--------------|--|--|-------------|
| <p>Blanking plate SSQ1000-10A-3 P.803</p>  | <p>Individual SUP/EXH spacer SSQ1000-PR1-3-C₆L₆ P.804</p>  | <p>Name plate (-N) SSQ1000-N3-n P.806</p>  | <p>External pilot specifications (-R) P.807 External pilot port</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>SUP/EXH block SSQ1000-PR-3-C8(-S) P.803</p>  | <p>SUP block plate SSQ1000-B-P P.805</p>  | <p>Blanking plug KQ2P-23/04/06/08 P.806</p>  | <p>Dual flow fitting SSQ1000-52A-C₈N₉ P.807</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Individual SUP spacer SSQ1000-P-3-C₆L₆ P.803</p>  | <p>EXH block plate SSQ1000-B-R P.805</p>  | <p>Port plug VVQZ100-CP P.806</p>  | <p>Silencer (For EXH port) P.807</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Individual EXH spacer SSQ1000-R-3-C₆L₆ P.804</p>  | <p>Back pressure check valve (-B) SSQ1000-BP P.805</p>  | <p>Built-in silencer, direct exhaust (-S) P.806</p>  | <p>Special wiring specifications (-K) P.813</p> <p>D-sub connector</p> <table border="0"> <tr> <td>Terminal no.</td> <td>1 station</td> <td>SOLA_o1 (-)</td> </tr> <tr> <td></td> <td>2 stations</td> <td>SOLA_o14 (-)</td> </tr> <tr> <td></td> <td>3 stations</td> <td>SOLA_o2 (-)</td> </tr> <tr> <td></td> <td>4 stations</td> <td>SOLA_o15 (-)</td> </tr> <tr> <td></td> <td>5 stations</td> <td>SOLB_o3 (-)</td> </tr> <tr> <td></td> <td>6 stations</td> <td>SOLB_o16 (-)</td> </tr> <tr> <td></td> <td>7 stations</td> <td>SOLB_o4 (-)</td> </tr> <tr> <td></td> <td>8 stations</td> <td>SOLB_o17 (-)</td> </tr> <tr> <td></td> <td></td> <td>SOLA_o5 (-)</td> </tr> <tr> <td></td> <td></td> <td>SOLA_o18 (-)</td> </tr> <tr> <td></td> <td></td> <td>SOLA_o6 (-)</td> </tr> <tr> <td></td> <td></td> <td>SOLA_o19 (-)</td> </tr> <tr> <td></td> <td></td> <td>COM_o13 (+)</td> </tr> </table> <p>Connector terminal no.</p> <p>Although the standard products come with double wiring, mixed single and double wiring is available upon request.</p> | Terminal no. | 1 station | SOLA_o1 (-) | | 2 stations | SOLA_o14 (-) | | 3 stations | SOLA_o2 (-) | | 4 stations | SOLA_o15 (-) | | 5 stations | SOLB_o3 (-) | | 6 stations | SOLB_o16 (-) | | 7 stations | SOLB_o4 (-) | | 8 stations | SOLB_o17 (-) | | | SOLA_o5 (-) | | | SOLA_o18 (-) | | | SOLA_o6 (-) | | | SOLA_o19 (-) | | | COM_o13 (+) |
| Terminal no. | 1 station | SOLA_o1 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 stations | SOLA_o14 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3 stations | SOLA_o2 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4 stations | SOLA_o15 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5 stations | SOLB_o3 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 stations | SOLB_o16 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 7 stations | SOLB_o4 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 8 stations | SOLB_o17 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | SOLA_o5 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | SOLA_o18 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | SOLA_o6 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | SOLA_o19 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | COM_o13 (+) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

How to Order Manifold Assembly

Example: D-sub connector kit, with cable (3 m)

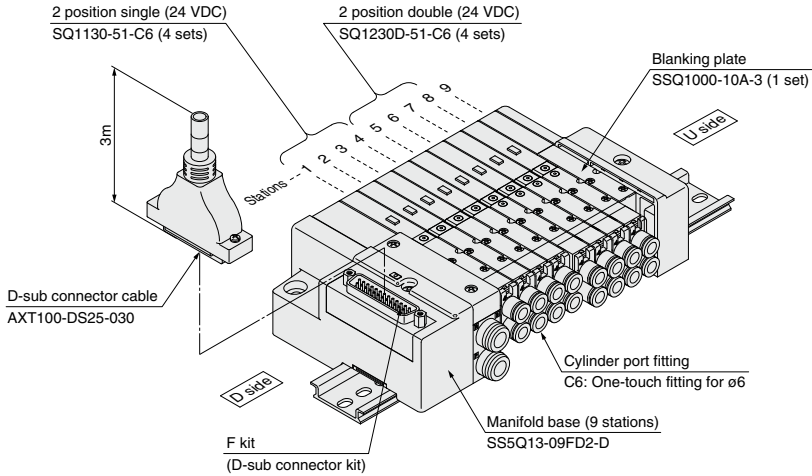

- SS5Q13-09FD2-D 1 set (F kit 9-station manifold base)**
*** SQ1130-51-C6 4 sets (2 position single)**
*** SQ1230D-51-C6 4 sets (2 position double)**
*** SSQ1000-10A-3 1 set (Blanking plate)**

The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part numbers in order starting from the first station on the D side.
 When entry of part numbers becomes complicated, indicate on the manifold specification sheet.

| |
|-------------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Valve Specifications

Model

| Series | Type of actuation | Seal | Model | Flow rate characteristic (1) | | | | | | Response time (ms) (2) | | Weight (g) | |
|--------|-------------------|-------------------|---------------|------------------------------|------|------|------------------------------|------|------|------------------------|-------------------------|------------|-----|
| | | | | 1 → 4/2 (P → A/B) | | | 4 → 5 (A → R1) | | | Standard (0.4 W) | Quick response (0.95 W) | | |
| | | | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | | | | |
| SQ1000 | 2 position | Single | Metal seal | SQ1130 | 0.62 | 0.10 | 0.14 | 0.63 | 0.11 | 0.14 | 26 or less | 12 or less | 80 |
| | | | Rubber seal | SQ1131 | 0.79 | 0.20 | 0.19 | 0.80 | 0.20 | 0.19 | 24 or less | 15 or less | 80 |
| | | Double | Metal seal | SQ1230D | 0.62 | 0.10 | 0.14 | 0.63 | 0.11 | 0.14 | 13 or less | 10 or less | 95 |
| | | | Rubber seal | SQ1231D | 0.79 | 0.20 | 0.19 | 0.80 | 0.20 | 0.19 | 20 or less | 15 or less | 95 |
| | 3 position | Closed center | Metal seal | SQ1330 | 0.58 | 0.12 | 0.14 | 0.63 | 0.11 | 0.14 | 44 or less | 29 or less | 100 |
| | | | Rubber seal | SQ1331 | 0.64 | 0.20 | 0.15 | 0.58 | 0.26 | 0.16 | 39 or less | 25 or less | 100 |
| | | Exhaust center | Metal seal | SQ1430 | 0.58 | 0.12 | 0.14 | 0.60 | 0.14 | 0.14 | 44 or less | 29 or less | 100 |
| | | | Rubber seal | SQ1431 | 0.64 | 0.20 | 0.15 | 0.80 | 0.20 | 0.19 | 39 or less | 25 or less | 100 |
| | Pressure center | Metal seal | SQ1530 | 0.62 | 0.12 | 0.14 | 0.63 | 0.14 | 0.14 | 44 or less | 29 or less | 100 | |
| | | Rubber seal | SQ1531 | 0.79 | 0.21 | 0.19 | 0.59 | 0.20 | 0.14 | 39 or less | 25 or less | 100 | |
| | 4 position | Dual 3 port valve | Rubber seal | SQ1631 | 0.59 | 0.28 | 0.15 | 0.59 | 0.28 | 0.15 | 27 or less | 14 or less | 95 |

Note 1) Values for the cylinder port size of C6, CYL → Values of EXH. Flow rate characteristics of 2 → 3 (B → R2) declines about 30% of 4 → 5 (A → R1).
 Note 2) Based on JIS B 8419: 2010. (Values with a supply pressure of 0.5 MPa and light/surge voltage suppressor. Values fluctuate depending on the pressure and air quality.)



Specifications



| Valve specifications | Valve construction | Metal seal | Rubber seal | |
|---------------------------------|-------------------------------|---|---|----------|
| | Fluid | Air | | |
| | Maximum operating pressure | 0.7 MPa (High pressure type (3): 1.0 MPa) | | |
| | Min. operating pressure | Single | 0.1 MPa | 0.15 MPa |
| | | Double (Double solenoid) | 0.1 MPa | 0.1 MPa |
| | | 3 position | 0.1 MPa | 0.2 MPa |
| | | 4 position | — | 0.15 MPa |
| | Ambient and fluid temp. | -10 to 50°C (1) | | |
| | Lubrication | Not required | | |
| | Pilot valve manual override | Push type/Locking type (Tool required) | | |
| Vibration/Impact resistance (2) | 30/150 m/s ² | | | |
| Protection structure | Dust tight | | | |
| Solenoid specifications | Coil rated voltage | 12 VDC, 24 VDC | | |
| | Allowable voltage fluctuation | ±10% of rated voltage | | |
| | Coil insulation type | Equivalent to class B | | |
| | Power consumption (Current) | 24 VDC | 0.4 W DC (17 mA), 0.95 W DC (40 mA) (4) | |
| | 12 VDC | 0.4 W DC (34 mA), 0.95 W DC (80 mA) (4) | | |

Note 1) Use dry air to prevent condensation when operating at low temperatures.
 Note 2) Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)
 Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and deenergized states every once for each condition.

Note 3) Metal seal type only.
 Note 4) Value for quick response, high pressure type

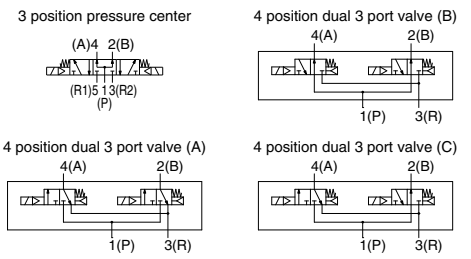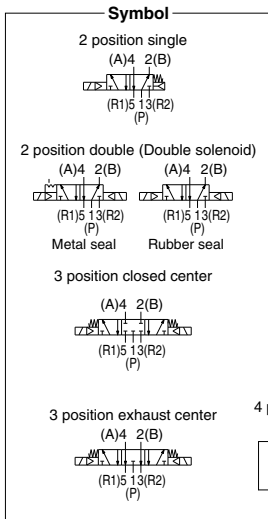

Manifold Specifications


| Base model | Porting specifications | | | Applicable solenoid valve | Type of connection | | Applicable stations (3) (Double wiring) | 5-station weight (4) (g) | Addition per station (4) (g) |
|-------------|---|---------------|----------------|---------------------------|----------------------------|--|--|-----------------------------|---------------------------------|
| | Port size (1) | | | | | | | | |
| | 1(P), 3(R) | Port location | 4(A), 2(B) | | | | | | |
| SS5Q13-□□□□ | C8 (For ø8) | Side | C3 (For ø3.2) | SQ1□30 SQ1□31 | F kit: D-sub connector | | 1 to 12 stations | 420 | 20 |
| | | | C4 (For ø4) | | P kit: Flat ribbon cable | | 26P 1 to 12 stations | 420 | 20 |
| | Option Built-in silencer, (direct exhaust) | Top (2) | C6 (For ø6) | | L kit: Lead wire | | 1 to 9 stations | 460 | 35 |
| | | | M5 (M5 thread) | | S kit: Serial transmission | | 1 to 8 stations | 475 | 20 |
| | | | L3 (For ø3.2) | | | | | | |
| | | | L4 (For ø4) | | | | | | |
| | | | L6 (For ø6) | | | | | | |
| | | | L5 (M5 thread) | | | | | | |

Note 1) One-touch fittings in inch sizes are also available. For details, refer to page 815.


Note 2) Can be changed to side ported configuration.

Note 3) An optional specification for special wiring is available to increase the maximum number of stations. Refer to page 813 for details.


Note 4) Except valves. For valve weight, refer to page 770.

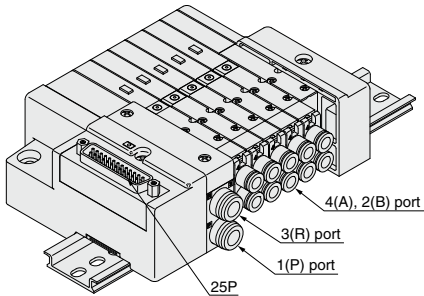


F kit

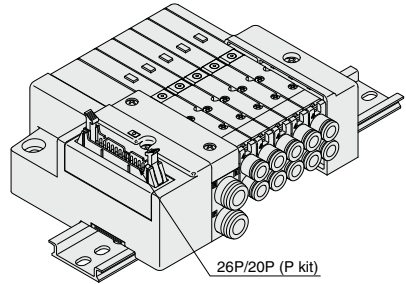

P kit

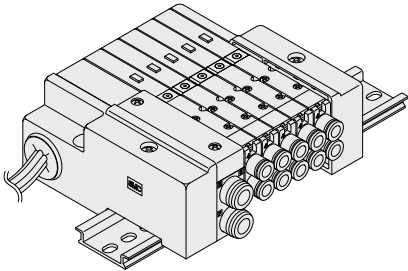

L kit

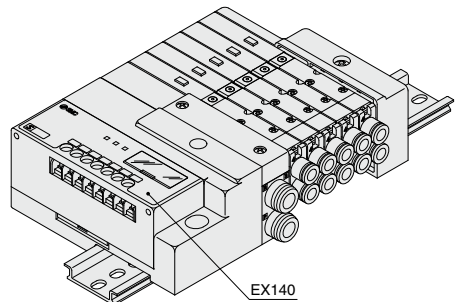

S kit

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System. Please download it via our website, <http://www.smccworld.com>

SV

SYJ

SZ

VF

VP4

VQ
1/2

VQ
4/5

VQC
1/2

VQC
4/5

VQZ

SQ


VFS

VFR

VQ7

SQ1000 Series

F Kit (D-sub Connector Kit)




- The D-sub connector reduces installation labor for electrical connections.
- Using the D-sub connector (25P), conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.

Manifold Specifications

| Series | Port location | Porting specifications | | Maximum number of stations |
|--------|---------------|------------------------|-------------|--|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3,C4,C6,M5 | 12 stations (24 as a semi-standard) |


D-sub Connector (25 Pins)

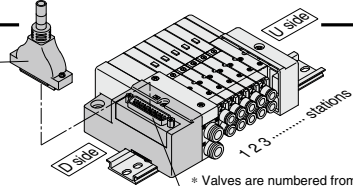

Cable Assembly

015
AXT100-DS25-030
050

(The D-sub connector cable assemblies can be ordered with manifolds. Refer to "How to Order Manifold.")

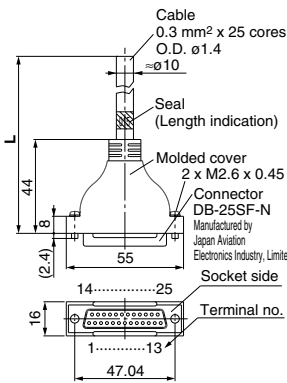

D-sub Connector Cable Assembly Terminal No.

| Terminal number | Lead wire color | Dot marking |
|-----------------|-----------------|-------------|
| 1 | Black | None |
| 2 | Brown | None |
| 3 | Red | None |
| 4 | Orange | None |
| 5 | Yellow | None |
| 6 | Pink | None |
| 7 | Blue | None |
| 8 | Purple | White |
| 9 | Gray | Black |
| 10 | White | Black |
| 11 | White | Red |
| 12 | Yellow | Red |
| 13 | Orange | Red |
| 14 | Yellow | Black |
| 15 | Pink | Black |
| 16 | Blue | White |
| 17 | Purple | None |
| 18 | Gray | None |
| 19 | Orange | Black |
| 20 | Red | White |
| 21 | Brown | White |
| 22 | Pink | Red |
| 23 | Gray | Red |
| 24 | Black | White |
| 25 | White | None |

D-sub Connector Cable Assembly

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|--------------------------------|
| 1.5 m | AXT100-DS25-015 | Cable |
| 3 m | AXT100-DS25-030 | 0.3 mm ² x 25 cores |
| 5 m | AXT100-DS25-050 | 25 cores |

* For other commercial connectors, use a 25 pins type with female connector conforming to MIL-C-24308.

* Cannot be used for movable wiring.

* Lengths other than the above are also available. Please contact SMC for details.

Electrical Characteristics

| Item | Property |
|--------------------------------------|------------|
| Conductor resistance Ω/km, 20°C | 65 or less |
| Withstand voltage VAC, 1 min. | 1000 |
| Insulation resistance MΩ/km, 20°C | 5 or more |


Note) The minimum bending radius of D-sub connector cable is 20 mm.

Connector manufacturers' example

- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- HIROSE ELECTRIC CO., LTD.

Electrical Wiring Specifications

D-sub connector



As the standard electrical wiring specifications, double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station for 12 stations or less, regardless of valve and option types.

Mixed single and double wiring is available as an option.




For details, refer to page 813.

Connector terminal no.

D-sub connector assembly wire colors (AXT100-DS25-015/050)

| Terminal no. | Polarity | Lead wire color | Dot marking |
|--------------|--------------|-----------------|-------------|
| 1 station | SOL_a 1 (-) | (+) Black | None |
| | SOL_b 14 (-) | (+) Yellow | Black |
| 2 stations | SOL_a 2 (-) | (+) Brown | None |
| | SOL_b 15 (-) | (+) Pink | Black |
| 3 stations | SOL_a 3 (-) | (+) Red | None |
| | SOL_b 16 (-) | (+) Blue | White |
| 4 stations | SOL_a 4 (-) | (+) Orange | None |
| | SOL_b 17 (-) | (+) Purple | None |
| 5 stations | SOL_a 5 (-) | (+) Yellow | None |
| | SOL_b 18 (-) | (+) Gray | None |
| 6 stations | SOL_a 6 (-) | (+) Pink | None |
| | SOL_b 19 (-) | (+) Orange | Black |
| 7 stations | SOL_a 7 (-) | (+) Blue | None |
| | SOL_b 20 (-) | (+) Red | White |
| 8 stations | SOL_a 8 (-) | (+) Purple | White |
| | SOL_b 21 (-) | (+) Brown | White |
| 9 stations | SOL_a 9 (-) | (+) Gray | Black |
| | SOL_b 22 (-) | (+) Pink | Red |
| 10 stations | SOL_a 10 (-) | (+) White | Black |
| | SOL_b 23 (-) | (+) Gray | Red |
| 11 stations | SOL_a 11 (-) | (+) White | Red |
| | SOL_b 24 (-) | (+) Black | White |
| 12 stations | SOL_a 12 (-) | (+) Yellow | Red |
| | SOL_b 25 (-) | (+) White | None |
| | COM. 13 (+) | (-) Orange | Red |

Note) When using the negative common specifications, use valves for negative common.

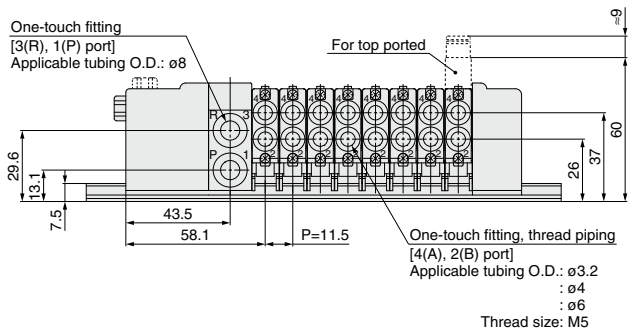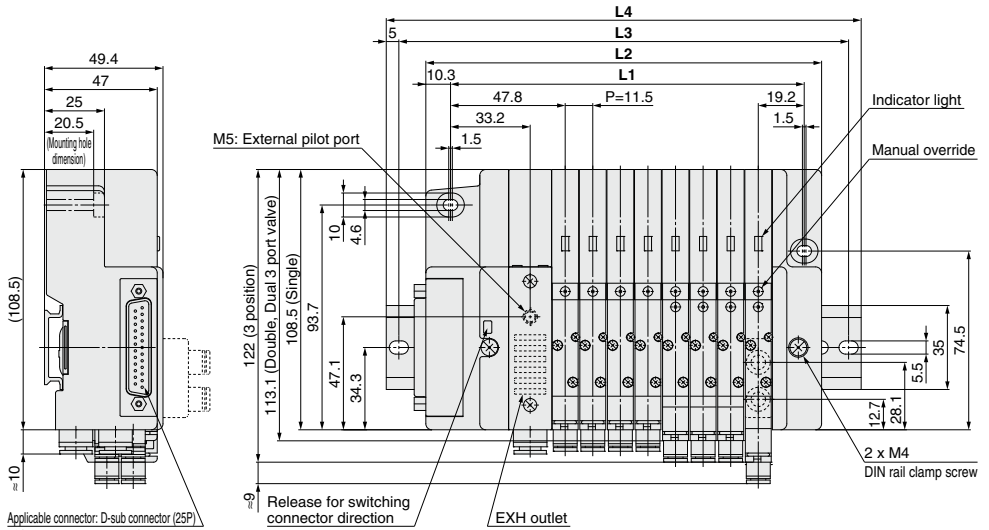

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7


Dimensions

Formula: $L1 = 11.5n + 55.5$, $L2 = 11.5n + 73$ n: Stations (Maximum 24 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 67 | 78.5 | 90 | 101.5 | 113 | 124.5 | 136 | 147.5 | 159 | 170.5 | 182 | 193.5 | 205 | 216.5 | 228 | 239.5 | 251 | 262.5 | 274 | 285.5 | 297 | 308.5 | 320 | 331.5 |
| L2 | | 84.5 | 96 | 107.5 | 119 | 130.5 | 142 | 153.5 | 165 | 176.5 | 188 | 199.5 | 211 | 222.5 | 234 | 245.5 | 257 | 268.5 | 280 | 291.5 | 303 | 314.5 | 326 | 337.5 | 349 |
| L3 | | 112.5 | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 | 325 | 337.5 | 350 | 362.5 | 375 | |
| L4 | | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 | |

SQ1000 Series

P Kit (Flat Ribbon Cable Connector)



- Flat ribbon cable connector reduces installation labor for electrical connection.
- Using the connector for flat ribbon cable (26P, 20P) conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.

Manifold Specifications


| Series | Porting specifications Port location | Port size | | Maximum number of stations (24 as a semi-standard) |
|--------|---|------------|----------------|---|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3, C4, C6, M5 | 12 stations |

Flat Ribbon Cable (26 Pins, 20 Pins)

Cable Assembly

AXT100-FC $\begin{matrix} 20 \\ 26 \\ 26 \\ 3 \end{matrix}$

(Type 26P flat ribbon cable connector assemblies can be ordered with manifolds. Refer to "How to Order Manifold".)

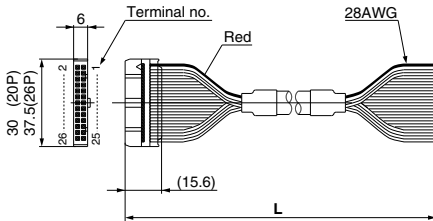


Flat Ribbon Cable Connector Assembly

| Cable length (L) | Assembly part no. | |
|------------------|-------------------|---------------|
| | 26P | 20P |
| 1.5 m | AXT100-FC26-1 | AXT100-FC20-1 |
| 3 m | AXT100-FC26-2 | AXT100-FC20-2 |
| 5 m | AXT100-FC26-3 | AXT100-FC20-3 |

- * For other commercial connectors, use a 26 pins or 20 pins with strain relief conforming to MIL-C-83503.
- * Cannot be used for movable wiring.
- * Lengths other than the above are also available. Please contact SMC for details.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.




Electrical Wiring Specifications

Flat ribbon cable connector


Double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station, regardless of valve and option types. Mixed single and double wiring is available as an option. For details, refer to page 813.

Connector terminal no.


Triangle mark indicator position

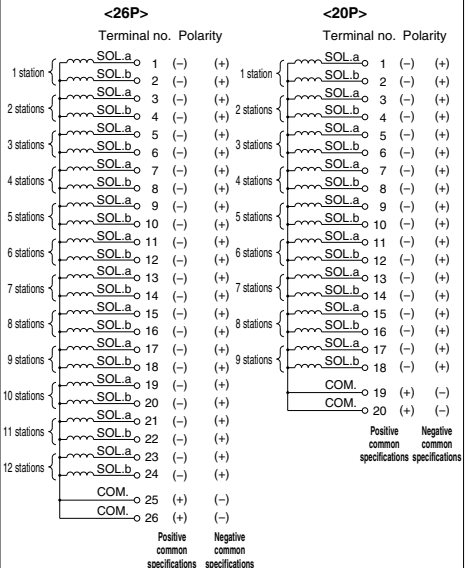

Note) When using the negative common specifications, use valves for negative common.

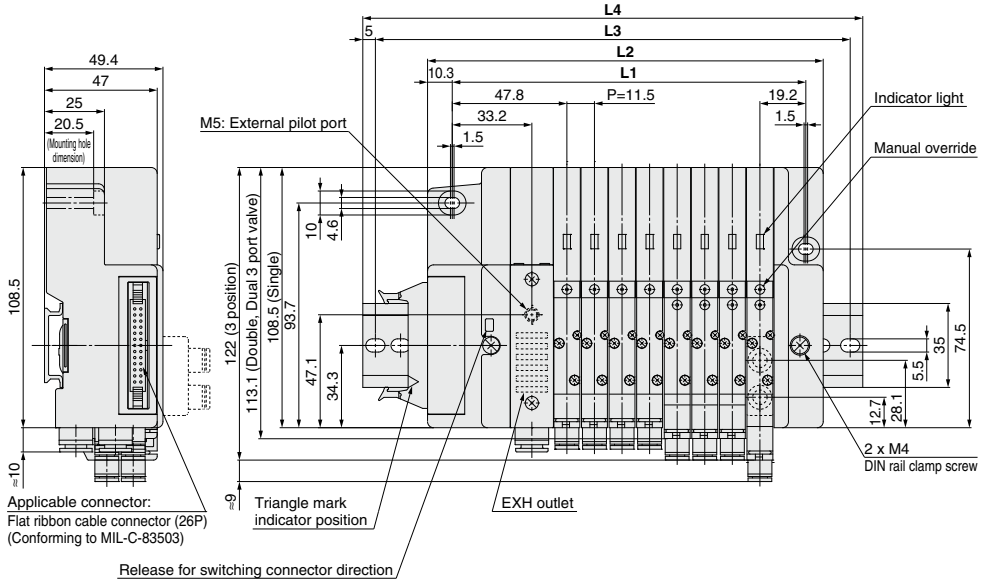

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ
- VFS
- VFR
- VQ7

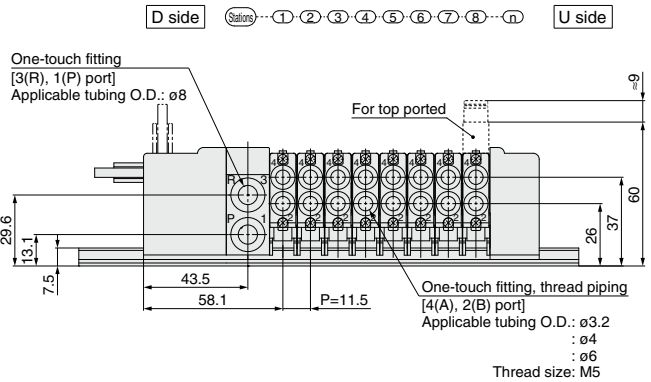

Dimensions


Formula: $L1 = 11.5n + 55.5$, $L2 = 11.5n + 73$ n: Stations (Maximum 24 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 67 | 78.5 | 90 | 101.5 | 113 | 124.5 | 136 | 147.5 | 159 | 170.5 | 182 | 193.5 | 205 | 216.5 | 228 | 239.5 | 251 | 262.5 | 274 | 285.5 | 297 | 308.5 | 320 | 331.5 |
| L2 | | 84.5 | 96 | 107.5 | 119 | 130.5 | 142 | 153.5 | 165 | 176.5 | 188 | 199.5 | 211 | 222.5 | 234 | 245.5 | 257 | 268.5 | 280 | 291.5 | 303 | 314.5 | 326 | 337.5 | 349 |
| L3 | | 112.5 | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 | 312.5 | 325 | 337.5 | 350 | 362.5 | 375 | |
| L4 | | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 | |

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series


L Kit (Lead Wire Cable)



● Direct electrical entry type

Manifold Specifications


| Series | Port location | Porting specifications | | Maximum number of stations |
|---------------|---------------|------------------------|----------------|----------------------------|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3, C4, C6, M5 | 12 stations |



* Valves are numbered from the D side.


● Wiring Specifications: Positive Common Specifications

Three lead wires are included per station regardless of valves used. Among the three lead wires, the red wire is for COM.




Single solenoid

Double solenoid

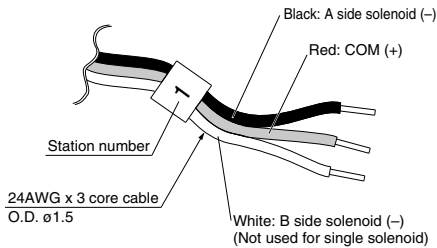


● Wiring Specifications: Negative Common Specifications (Semi-standard)

Three lead wires are included per station regardless of valves used. Among the three lead wires, the black wire is for COM.



Single solenoid

Double solenoid

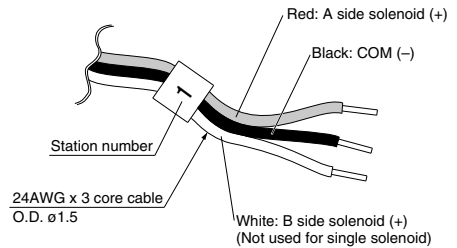

Note) When using the negative common specifications, use valves for negative common.

Negative Common Specifications

The following part numbers are for negative common specifications.

● How to order negative common valves (Example)

SQ1130 N -51-C6

┆ Negative common specifications

● How to order negative common manifold (Example)


SS5Q13-08LD1N-DIN

┆ Stations


┆ Kit type

┆ DIN rail mounting types

┆ Negative common specifications

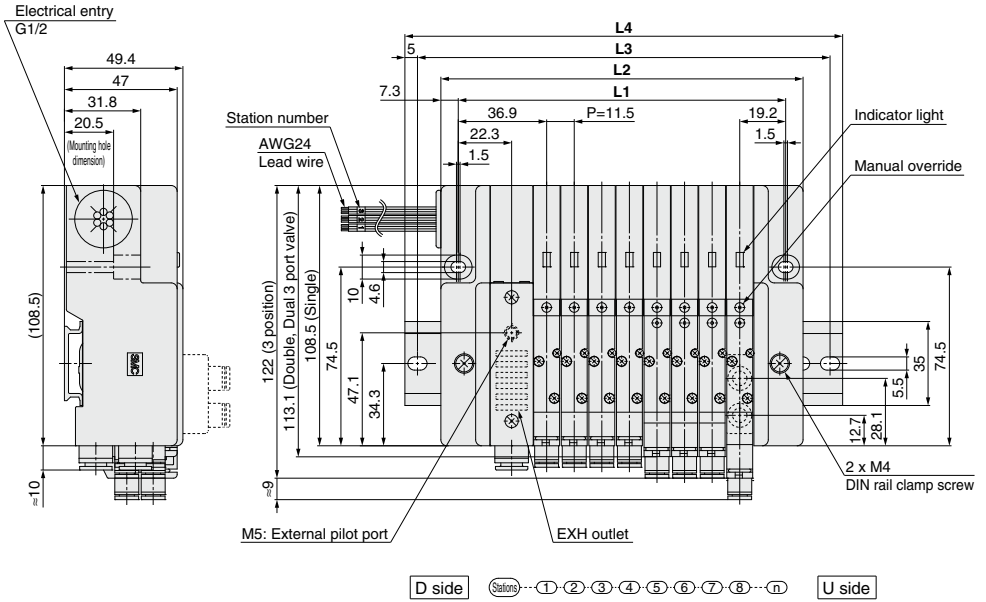

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7

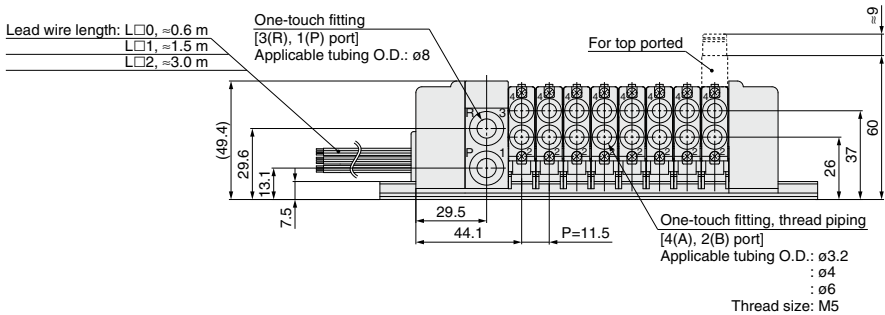


Dimensions Formula: L1 = 11.5n + 44.5, L2 = 11.5n + 59 n: Stations (Maximum 12 stations)

| L \ n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 56 | 67.5 | 79 | 90.5 | 102 | 113.5 | 125 | 136.5 | 148 | 159.5 | 171 | 182.5 |
| L2 | 70.5 | 82 | 93.5 | 105 | 116.5 | 128 | 139.5 | 151 | 162.5 | 174 | 185.5 | 197 |
| L3 | 100 | 112.5 | 125 | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 |
| L4 | 110.5 | 123 | 135.5 | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 |

SQ1000 Series

S Kit (Serial Transmission Unit) EX140 Integrated-type (For Output) Serial Transmission System





- The serial transmission system reduces wiring work, while minimizing wiring and saving space.
- The maximum number of stations is 8. (16 as a semi-standard). Only for type J2 and R2, the maximum stations are 4 (8 as a semi-standard).

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System.
Please download it via our website, <http://www.smcworld.com>

Manifold Specifications

| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|---------------------------------------|
| | Port location | Port size | |
| SQ1000 | Side, Top | 1(P), 3(R) | 8 stations (16 as a semi-standard) |
| | | 4(A), 2(B) | |

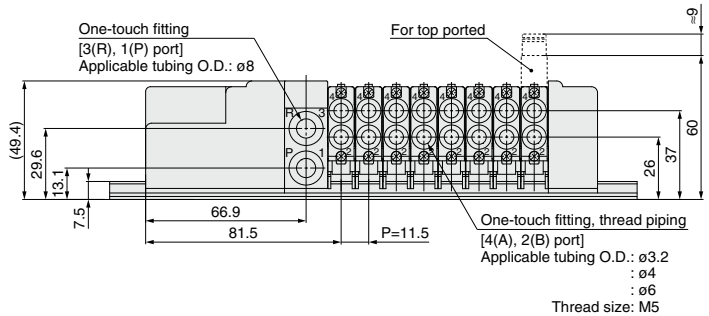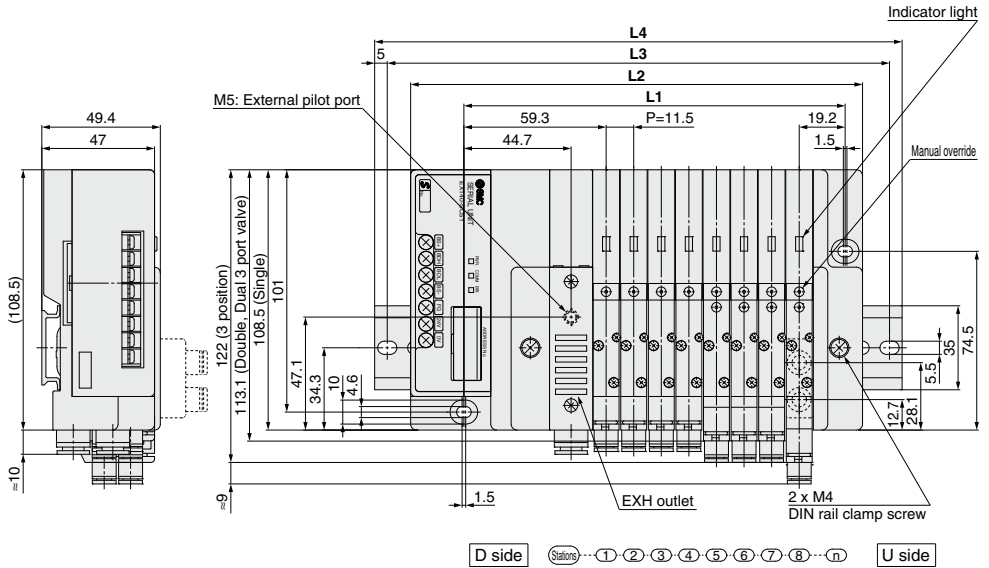

Dimensions

Formula: $L1 = 11.5n + 67$, $L2 = 11.5n + 96.5$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 78.5 | 90 | 101.5 | 113 | 124.5 | 136 | 147.5 | 159 | 170.5 | 182 | 193.5 | 205 | 216.5 | 228 | 239.5 | 251 |
| L2 | | 108 | 119.5 | 131 | 142.5 | 154 | 165.5 | 177 | 188.5 | 200 | 211.5 | 223 | 234.5 | 246 | 257.5 | 269 | 280.5 |
| L3 | | 137.5 | 150 | 162.5 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 300 |
| L4 | | 148 | 160.5 | 173 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 310.5 |


| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

EX510 Gateway-type Serial Transmission System Plug-in Unit

SQ2000 Series




How to Order Manifold

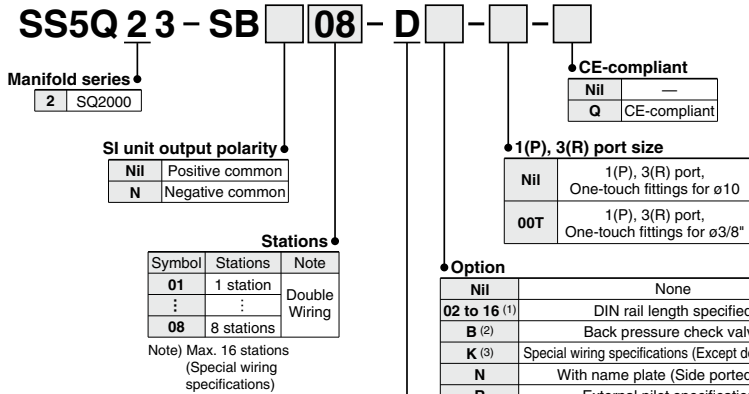

How to Order Manifold

Example

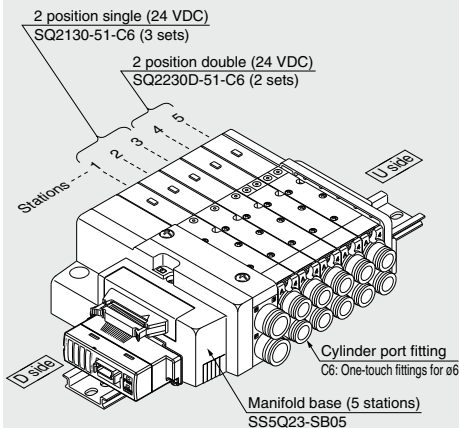

SS5Q23-SB05-D ... 1 set (SB kit 5-station manifold base part no.)

* SQ2130-51-C6 3 sets (Single type part no.)

* SQ2230D-51-C6 2 sets (Double type part no.)

— The asterisk denotes the symbol for assembly.
Prefix it to the part nos. of the solenoid valve, etc.

— Enter in order starting from the first station on the D side.

Add the valve and option part number under the manifold base part number.
When entry of part numbers becomes complicated, indicate by the manifold specification sheet.

- Note 1) Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.)
The number of stations that may be displayed is longer than the manifold number of stations.
Example: -D09
- Note 2) When "-B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("B" is not necessary)
- Note 3) Specify "-K" for wiring specification for cases below.
- All single wiring
 - Single and double mixed wiring
 - When there are stations which do not require wiring (e.g. single SUP spacer), specify the wiring specification in the manifold specification so that the number of the solenoids is 16 maximum. (Standard wiring specification is double wiring)
- Note 4) For specifying two or more options, enter them alphabetically.
Example: -BKN
- * Refer to pages 808 to 815 for manifold option parts.

DIN rail mounting

SI Unit Part No.

| Symbol | SI unit output polarity | SI unit part no. | Page |
|--------|-------------------------|------------------|-------------------------|
| Nil | Positive common | EX510-S002B | Best Pneumatics No. 1-1 |
| N | Negative common | EX510-S102B | P.897 |

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX510 Gateway-type Serial Transmission System.
Please download it via our website, <http://www.smcworld.com>



How to Order Valves

SQ 2 1 3 0 - **5** - **1** - **C6** - - -

Series
2 SQ2000

Seal
0 Metal seal
1 Rubber seal

CE-compliant
Nil -
Q CE-compliant

• **Type of actuation**

| | |
|-------|--|
| 1 | 2 position single (A)4 2(B) (R1)5 13(R2) (P) |
| 2 | 2 position double (Double solenoid) (1) (A)4 2(B) (A)4 2(B) (R1)5 13(R2) (R1)5 13(R2) (P) (P) Metal seal Rubber seal |
| 3 | 3 position closed center (A)4 2(B) (R1)5 13(R2) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (R1)5 13(R2) (P) |
| 5 | 3 position pressure center (A)4 2(B) (R1)5 13(R2) (P) |
| A (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| B (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| C (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |

Note 1) For double solenoid specification, the function symbol below is "D".
Note 2) Only rubber seal types are applicable.

• **Function**

| Symbol | Specifications |
|--------|--|
| Nil | Standard type (0.4 W) |
| B | Quick response type (0.95 W) |
| D (1) | 2 position double (Double solenoid specifications) |
| N (2) | Negative common |
| R (3) | External pilot specifications |

Note 1) "D" is specified for 2 position double.
Note 2) When SI unit output polarity is negative common, the valve common specification should be also be negative common.
Note 3) Except dual 3 port valves.
Note 4) When two or more symbols are specified, indicate them alphabetically.

• **With/Without manifold block**

| Nil | M | MB |
|--|------------------------------|---|
| Without manifold block | With manifold block | With manifold block, built-in back pressure check valve |
| | | |
| | * Lead wire is not included. | * Lead wire is not included. |
| • When ordering with manifolds • When only valves are required. | For adding stations | |

• **Port plug mounting port**

| | |
|-----|-----------|
| Nil | None |
| A | Port 4(A) |
| B | Port 2(B) |

• **Cylinder port**

| Symbol | Port size | Port location | |
|--------|---------------------------|----------------|--|
| C4 | One-touch fittings for ø4 | Side ported | |
| C6 | One-touch fittings for ø6 | | |
| C8 | One-touch fittings for ø8 | Top (1) ported | |
| L4 | One-touch fittings for ø4 | | |
| L6 | One-touch fittings for ø6 | | |
| L8 | One-touch fittings for ø8 | | |

Note 1) Can be changed to side ported configuration.
Note 2) Refer to page 815 for the inch-size One-touch fittings.

• **Manual override**

| Nil | B | D |
|---------------------------------------|------------------------------|--|
| Non-locking push type (Tool required) | Locking type (Tool required) | Slide locking type (Manual type) * Only side ported type applicable |
| | | |

• **Rated voltage**



5 24 VDC

Note) Light/surge voltage suppressor is built-in.

| |
|---------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series

Dimensions: SQ2000

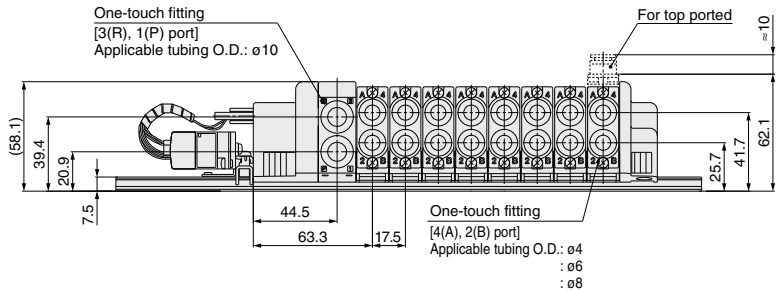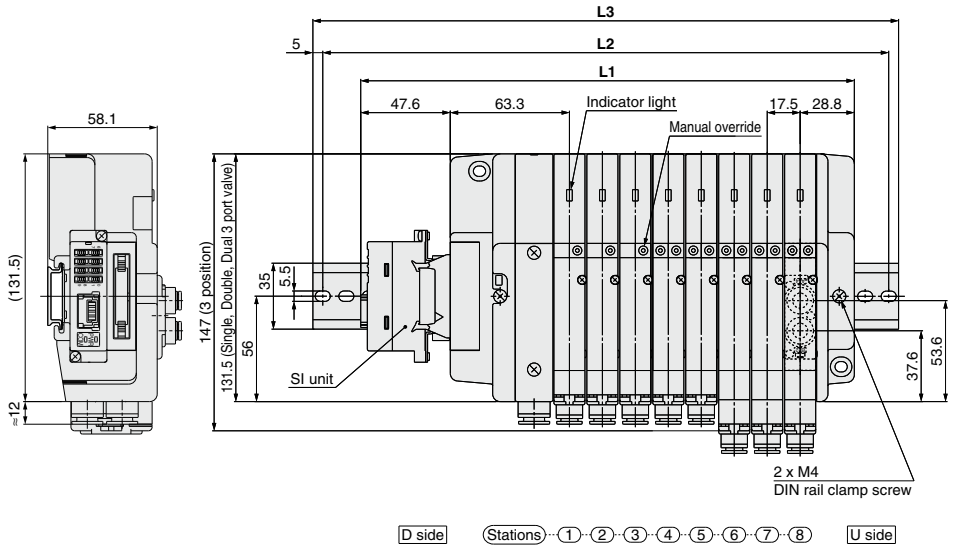

Dimensions

Formula: $L1 = 17.5n + 122$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 139.5 | 157 | 174.5 | 192 | 209.5 | 227 | 244.5 | 262 | 279.5 | 297 | 314.5 | 332 | 349.5 | 367 | 384.5 | 402 |
| L2 | | 162.5 | 187.5 | 200 | 212.5 | 237.5 | 250 | 275 | 287.5 | 300 | 325 | 337.5 | 362.5 | 375 | 387.5 | 412.5 | 425 |
| L3 | | 173 | 198 | 210.5 | 223 | 248 | 260.5 | 285.5 | 298 | 310.5 | 335.5 | 348 | 373 | 385.5 | 398 | 423 | 435.5 |

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

Plug-in Unit

SQ2000 Series



How to Order Manifold

SS5Q23-08 FD2-D □ □ □

Stations

| | |
|-----------|-------------|
| 01 | 1 station |
| ⋮ | ⋮ |
| 16 (Note) | 16 stations |

Note) The maximum number of stations depends on the type of electrical entries. Refer to "Electrical entry" for details.

Manifold mounting

| | |
|----------|------------------------|
| D | DIN rail mounting type |
| E (Note) | Direct mounting type |

Note) Refer to page 814 for details.

Option

| | |
|--------------|--|
| Nil | None |
| 02 to 16 (1) | DIN rail length specified |
| B (2) | Back pressure check valve |
| K (3) | Special wiring specifications (Except double wiring) |
| N | With name plate (Side ported only) |
| R | External pilot specifications |
| S | Built-in silencer, direct exhaust |

1(P), 3(R) port size

| | |
|-----|---|
| Nil | 1(P), 3(R) port One-touch fittings for $\phi 10$ |
| 00T | 1(P), 3(R) port One-touch fittings for $\phi 3/8"$ |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Note 1) Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.)
The number of stations that may be displayed is longer than the manifold number of stations.
Example: -009






Note 2) When "-B" is selected, a back pressure check valve is included in all stations of the manifold.
If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("-B" is not necessary)

Note 3) Specify "-K" for wiring specification for cases below. (Except L kit)

- All single wiring
- Single and double mixed wiring.
- When there are stations which do not require wiring (e.g. single SUP spacer), specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)

Note 4) For specifying two or more options, enter them alphabetically. Example: -BKN
* Refer to pages 808 to 815 for manifold option parts.

Electrical entry

| Kit type | Lead wire connector location | Cable/SI unit specifications | Station (Double wiring) | Max. number of stations for special wiring specifications | Max. number of solenoids for special wiring specifications (2) | CE-compliant | |
|--|------------------------------|------------------------------|---|---|--|--------------|-----------------|
| F kit  D-sub connector kit | D side | FD0 | D-sub connector (25P) kit, without cable | 1 to 12 stations | 16 stations | ● | |
| | | FD1 | D-sub connector (25P) kit, with 1.5 m cable | | | | |
| | | FD2 | D-sub connector (25P) kit, with 3.0 m cable | | | | |
| | | FD3 | D-sub connector (25P) kit, with 5.0 m cable | | | | |
| P kit  Flat ribbon cable connector kit (26P/20P) | D side (1) | PD0 | Flat ribbon cable (26P) kit, without cable | 1 to 12 stations | 16 stations | ● | |
| | | PD1 | Flat ribbon cable (26P) kit, with 1.5 m cable | | | | |
| | | PD2 | Flat ribbon cable (26P) kit, with 3.0 m cable | | | | |
| | | PD3 | Flat ribbon cable (26P) kit, with 5.0 m cable | | | | |
| | | PDC | Flat ribbon cable (20P) kit, without cable | | | | 1 to 9 stations |
| T kit  Terminal block box kit | D side | TD0 | Terminal block box kit | 1 to 10 stations | 16 stations | 20 | ● |
| L kit Note 3)  Lead wire kit | D side | LD0 (N) | Lead wire kit with 0.6 m cable | 1 to 12 stations | — | — | ● |
| | U side | LU0 (N) | | | | | |
| | D side | LD1 (N) | Lead wire kit with 1.5 m cable | | | | |
| | U side | LU1 (N) | | | | | |
| | D side | LD2 (N) | Lead wire kit with 3.0 m cable | | | | |
| U side | LU2 (N) | | | | | | |
| S kit  Serial transmission kit EX140 Integrated-type (For Output) Serial Transmission System (4) | D side | SDH | NKE Corp.: Fieldbus H System | 1 to 8 stations | 16 stations | 16 | — |
| | | SDQ | DeviceNet | | | | |
| | | SDR1 | OMRON Corp.: CompoBus/S (16 output points) | | | | |
| | | SDR2 | OMRON Corp.: CompoBus/S (8 output points) | | | | |
| | | SDV | CC-LINK | | | | |
| | | | | | | | |
| | | | 1 to 8 stations | 16 stations | 16 | | |

Note 1) Separately order the 20P type cable assembly for the P kit.

Note 2) Specify the number of the solenoid so that the maximum station number is not exceeded. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

Note 3) When specifying the negative common specifications of the L kit, suffix "N" to the kit symbol. For details, refer to page 800.

Note 4) Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System.

Please download it via our website, <http://www.smcworld.com> * Refer to page 827 for manifold spare parts.

SI Unit Part No.

| Symbol | Protocol type | SI unit part no. | Page |
|--------|--|------------------|-------------------------------------|
| SDH | NKE Corp.: Fieldbus H System | EX140-SUH1 | Best Pneumatics No. 1-1 P.784 |
| SDQ | DeviceNet | EX140-SDN1 | |
| SDR1 | OMRON Corp.: CompoBus/S (16 output points) | EX140-SCS1 | |
| SDR2 | OMRON Corp.: CompoBus/S (8 output points) | EX140-SCS2 | |
| SDV | CC-LINK | EX140-SMJ1 | |

How to Order Valves

SQ2 1 3 0 [] - **5** [] **1 - C6** - [] - [] - []

Seal

| | |
|---|-------------|
| 0 | Metal seal |
| 1 | Rubber seal |

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

Type of actuation

| | |
|--------------|--|
| 1 | 2 position single (A)4 2(B) (R1)5 1 3(R2) (P) |
| 2 | 2 position double (Double solenoid) (1) (A)4 2(B) (A)4 2(B) (R1)5 1 3(R2) (R1)5 1 3(R2) (P) (P) Metal seal Rubber seal |
| 3 | 3 position closed center (A)4 2(B) (R1)5 1 3(R2) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (R1)5 1 3(R2) (P) |
| 5 | 3 position pressure center (A)4 2(B) (R1)5 1 3(R2) (P) |
| A (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| B (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| C (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |

Note 1) For double solenoid specification, the function symbol below is "D".

Note 2) Only rubber seal types are applicable.

Function

| Symbol | Specifications |
|--------------|--|
| Nil | Standard type (0.4 W) |
| B | Quick response type (0.95 W) |
| D (1) | 2 position double (Double solenoid specifications) |
| N (2) | Negative common |
| R (3) | External pilot specifications |

Note 1) "D" is specified for 2 position double.

Note 2) For L kit, when the manifold specifies negative common, the valve common should also be negative. The combination of negative common of the valve cannot be specified with S kit (EX140).

Note 3) Except dual 3 port valves.

Note 4) When two or more symbols are specified, indicate them alphabetically.

With/Without manifold block

| Nil | M | MB |
|--|------------------------------|---|
| Without manifold block | With manifold block | With manifold block, built-in back pressure check valve |
| | * Lead wire is not included. | * Lead wire is not included. |
| <ul style="list-style-type: none"> When ordering with manifolds When only valves are required. | For adding stations | |

Port plug mounting port

| Nil | None |
|----------|-----------|
| A | Port 4(A) |
| B | Port 2(B) |

Cylinder port

| Symbol | Port size | Port location | |
|-----------|--------------------------------|----------------|--|
| C4 | With One-touch fittings for ø4 | Side ported | |
| C6 | With One-touch fittings for ø6 | | |
| C8 | With One-touch fittings for ø8 | Top (1) ported | |
| L4 | With One-touch fittings for ø4 | | |
| L6 | With One-touch fittings for ø6 | | |
| L8 | With One-touch fittings for ø8 | | |

Note 1) Can be changed to side ported configuration.

Note 2) Refer to page 815 for the inch-size One-touch fittings.

Manual override

| Nil | B | D |
|---------------------------------------|------------------------------|--|
| Non-locking push type (Tool required) | Locking type (Tool required) | Slide locking type (Manual type) * Only side ported type applicable |
| | | |

Rated voltage

| | |
|----------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Note 1) Light/surge voltage suppressor is built-in.

Note 2) S kit: 24 VDC only

SV

SYJ

SZ

VF

VP4

VQ 1/2

VQ 4/5

VQC 1/2

VQC 4/5

VQZ

SQ

















VFS

VFR

VQ7

SQ2000 Series


Manifold Options

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|--|--|--------------|-----------|------------|------------|-------------|------------|------------|------------|-------------|------------|------------|------------|-------------|------------|------------|------------|-------------|--|------------|--|-------------|--|------------|--|-------------|--|------------|
| <p>Blanking plate SSQ2000-10A-3 P.808</p>  | <p>Individual SUP/EXH spacer SSQ2000-PR1-3-C⁸_{L⁸} P.809</p>  | <p>Name plate (-N) SSQ2000-N3-n P.811</p>  | <p>External pilot specifications (-R) P.812</p> <p>External pilot port</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>SUP/EXH block SSQ2000-PR-3-C10(-S) P.808</p>  | <p>SUP block plate SSQ1000-B-R P.810</p>  <p>D side</p> <p>U side</p> | <p>Blanking plug KQ2P-04/06/08/10 P.811</p>  | <p>Dual flow fitting SSQ2000-52A-C¹⁰_{N11} P.812</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Individual SUP spacer SSQ2000-P-3-C⁸_{L⁸} P.808</p>  | <p>EXH block plate SSQ2000-B-R P.810</p>  <p>D side</p> <p>U side</p> | <p>Port plug VVQZ2000-CP P.811</p>  | <p>Silencer (For EXH port) P.812</p>  | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Individual EXH spacer SSQ2000-R-3-C⁸_{L⁸} P.809</p>  | <p>Back pressure check valve (-B) SSQ2000-BP P.810</p>  | <p>Built-in silencer, direct exhaust (-S) P.811</p>  | <p>Special wiring specifications (-K) P.813</p> <p>D-sub connector</p> <table border="0"> <tr> <td></td> <td>Terminal no.</td> </tr> <tr> <td>1 station</td> <td>SOLA 1 (-)</td> </tr> <tr> <td>2 stations</td> <td>SOLA 14 (-)</td> </tr> <tr> <td>3 stations</td> <td>SOLA 2 (-)</td> </tr> <tr> <td>4 stations</td> <td>SOLA 15 (-)</td> </tr> <tr> <td>5 stations</td> <td>SOLA 3 (-)</td> </tr> <tr> <td>6 stations</td> <td>SOLA 16 (-)</td> </tr> <tr> <td>7 stations</td> <td>SOLA 4 (-)</td> </tr> <tr> <td>8 stations</td> <td>SOLA 17 (-)</td> </tr> <tr> <td></td> <td>SOLA 5 (-)</td> </tr> <tr> <td></td> <td>SOLA 18 (-)</td> </tr> <tr> <td></td> <td>SOLA 6 (-)</td> </tr> <tr> <td></td> <td>SOLA 19 (-)</td> </tr> <tr> <td></td> <td>COM 13 (+)</td> </tr> </table> <p>Connector terminal no.</p>  | | Terminal no. | 1 station | SOLA 1 (-) | 2 stations | SOLA 14 (-) | 3 stations | SOLA 2 (-) | 4 stations | SOLA 15 (-) | 5 stations | SOLA 3 (-) | 6 stations | SOLA 16 (-) | 7 stations | SOLA 4 (-) | 8 stations | SOLA 17 (-) | | SOLA 5 (-) | | SOLA 18 (-) | | SOLA 6 (-) | | SOLA 19 (-) | | COM 13 (+) |
| | Terminal no. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 station | SOLA 1 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 stations | SOLA 14 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 stations | SOLA 2 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 stations | SOLA 15 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 stations | SOLA 3 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 stations | SOLA 16 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 stations | SOLA 4 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 stations | SOLA 17 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | SOLA 5 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | SOLA 18 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | SOLA 6 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | SOLA 19 (-) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | COM 13 (+) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Although the standard products come with double wiring, mixed single and double wiring is available upon request.

How to Order Manifold Assembly

Example: D-sub connector kit, with cable (3 m)

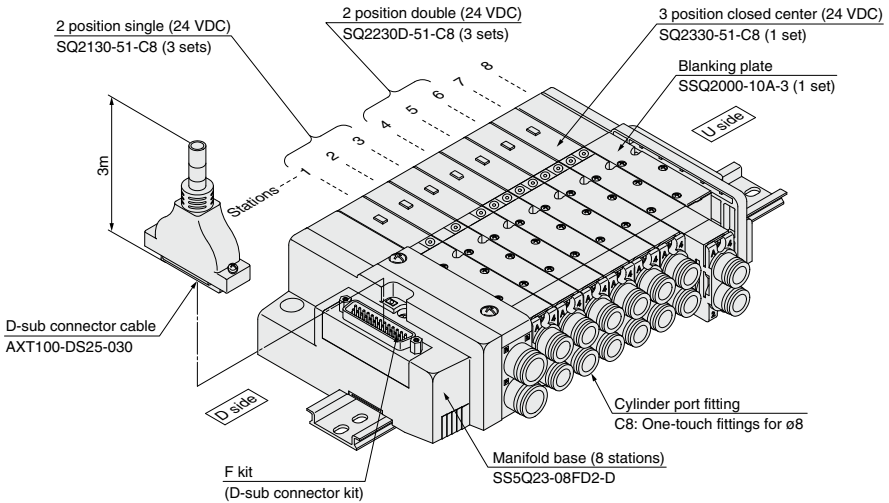

SS5Q23-08FD2-D ... 1 set (F kit 8-station manifold base)

* **SQ2130-51-C8** ... 3 sets (2 position single)

* **SQ2230D-51-C8** ... 3 sets (2 position double)

* **SQ2330-51-C8** ... 1 set (3 position closed center)

* **SSQ2000-10A-3** ... 1 set (Blanking plate)

↳ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part numbers in order starting from the first station on the D side.

When entry of part numbers becomes complicated, indicate on the manifold specification sheet.

| |
|-------------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series

Valve Specifications

Model

| Series | Type of actuation | Seal | Model | Flow characteristic (1) | | | | | | Response time (ms) (2) | | Weight (g) | |
|--------|-------------------|-------------------|-------------|------------------------------|-----|------|------------------------------|-----|------|------------------------|-------------------------|------------|-----|
| | | | | 1→4/2 (P→A/B) | | | 4/2→5/3 (A/B→R1/R2) | | | Standard (0.4 W) | Quick response (0.95 W) | | |
| | | | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | | | | |
| SQ2000 | 2 position | Single | Metal seal | SQ2130 | 2.2 | 0.17 | 0.51 | 2.4 | 0.14 | 0.57 | 35 or less | 20 or less | 145 |
| | | | Rubber seal | SQ2131 | 2.3 | 0.17 | 0.51 | 3.1 | 0.18 | 0.71 | 31 or less | 24 or less | 140 |
| | | Double | Metal seal | SQ2230D | 2.2 | 0.17 | 0.51 | 2.4 | 0.14 | 0.57 | 20 or less | 15 or less | 160 |
| | | | Rubber seal | SQ2231D | 2.3 | 0.17 | 0.51 | 3.1 | 0.18 | 0.71 | 26 or less | 20 or less | 155 |
| | 3 position | Closed center | Metal seal | SQ2330 | 1.9 | 0.17 | 0.46 | 2.1 | 0.15 | 0.47 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2331 | 1.9 | 0.17 | 0.46 | 1.8 | 0.29 | 0.47 | 44 or less | 34 or less | 175 |
| | | Exhaust center | Metal seal | SQ2430 | 1.9 | 0.17 | 0.46 | 2.4 | 0.14 | 0.55 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2431 | 1.9 | 0.17 | 0.46 | 3.1 | 0.14 | 0.65 | 44 or less | 34 or less | 175 |
| | | Pressure center | Metal seal | SQ2530 | 2.3 | 0.17 | 0.51 | 2.1 | 0.18 | 0.47 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2531 | 2.5 | 0.17 | 0.56 | 1.8 | 0.30 | 0.47 | 44 or less | 34 or less | 175 |
| | 4 position | Dual 3 port valve | Rubber seal | SQ2631 | 1.5 | 0.17 | 0.40 | 1.5 | 0.17 | 0.40 | 34 or less | 19 or less | 155 |

Note 1) Values for the top ported cylinder port size of C8. CYL → Values of EXH. The side ported type will be about 10% less.

Note 2) Based on JIS B 8419: 2010. (Values with a supply pressure of 0.5 MPa and light/surge voltage suppressor. Values fluctuate depending on the pressure and air quality.)

Specifications

| Valve specifications | Valve construction | Metal seal | Rubber seal | |
|---------------------------------|-------------------------------|---|---|----------|
| | Fluid | Air | | |
| | Maximum operating pressure | 0.7 MPa | | |
| | Min. operating pressure | Single | 0.1 MPa | 0.15 MPa |
| | | Double (Double solenoid) | 0.1 MPa | 0.1 MPa |
| | | 3 position | 0.1 MPa | 0.2 MPa |
| | | 4 position | — | 0.15 MPa |
| | Ambient fluid temperature | -10 to 50°C (1) | | |
| | Lubrication | Not required | | |
| | Pilot valve manual override | Push type (Tool required)/Locking type (Tool required)/Slide locking type (Manual type) | | |
| Vibration/Impact resistance (2) | 30/150 m/s ² | | | |
| Protection structure | Dust tight | | | |
| Solenoid specifications | Coil rated voltage | 12 VDC, 24 VDC | | |
| | Allowable voltage fluctuation | ±10% of rated voltage | | |
| | Coil insulation type | Equivalent to class B | | |
| | Power consumption (Current) | 24 VDC | 0.4 W DC (17 mA), 0.95 W DC (40 mA) (3) | |
| | | 12 VDC | 0.4 W DC (34 mA), 0.95 W DC (80 mA) (3) | |

Note 1) Use dry air to prevent condensation when operating at low temperatures.

Note 2) Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and de-energized states every once for each condition.


Note 3) Value for quick response type.



Symbol

2 position single


(A)4 2(B)



(P)

2 position double (Double solenoid)


(A)4 2(B) (A)4 2(B)



(P)

3 position closed center


(A)4 2(B)



(P)

3 position exhaust center


(A)4 2(B)



(P)

3 position pressure center


(A)4 2(B)



(P)

4 position dual 3 port valve (A)


4(A) 2(B)



5(R1) 1(P) 3(R2)

4 position dual 3 port valve (B)


4(A) 2(B)



5(R1) 1(P) 3(R2)

4 position dual 3 port valve (C)

4(A) 2(B)



5(R1) 1(P) 3(R2)

Manifold Specifications


| Base model | Porting specifications | | | Applicable solenoid valve | Type of connection | Applicable stations ⁽³⁾ (Double wiring) | 5-station weight ⁽⁴⁾ (g) | Addition per station ⁽⁴⁾ (g) | | |
|-------------|--|------------------|---|---------------------------|---|---|--|--|-----|----|
| | Port size ⁽¹⁾ | | Port location | | | | | | | |
| | 1(P), 3(R) | 4(A), 2(B) | | | | | | | | |
| SS5Q23-□□-□ | C10 (For ø10) Option Built-in silencer, (direct exhaust) | Side | C4 (For ø4) C6 (For ø6) C8 (For ø8) | SQ2□30 SQ2□31 | F kit: D-sub connector | 1 to 12 stations | 580 | 35 | | |
| | | | Top ⁽²⁾ | | L4 (For ø4) L6 (For ø6) L8 (For ø8) | P kit: Flat ribbon cable | 26P | 1 to 12 stations | 580 | 35 |
| | | | | | | | 20P | 1 to 9 stations | | |
| | T kit: Terminal block | 1 to 10 stations | 1,165 | | 620 | | | | | |
| | L kit: Lead wire | 1 to 12 stations | 620 | | 50 | | | | | |
| | S kit: Serial transmission | 1 to 8 stations | 650 | | 35 | | | | | |

Note 1) One-touch fittings in inch sizes are also available. For details, refer to page 815.


Note 2) Can be changed to side ported configuration.

Note 3) An optional specification for special wiring is available to increase the maximum number of stations. Refer to page 813 for details.


Note 4) Except valves. For valve weight, refer to page 790.




F kit




P kit



T kit



L kit



S kit

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System. Please download it via our website, <http://www.smcworld.com>

SV

SQ

SZ

VF

VP4

VQ
1/2

VQ
4/5

VQC
1/2

VQC
4/5

VQZ

SQ


VFS

VFR

VQ7

SQ2000 Series

F Kit (D-sub Connector Kit)




- Simplification and labor savings for wiring work can be achieved by using a D-sub connector for the electrical connection.
- Using connector for flat ribbon cable (25P) conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side entry for the connector can be changed freely, allowing later changes according to the mounting space.

Manifold Specifications

| Series | Porting specifications | | | Maximum number of stations |
|--------|------------------------|------------|------------|--|
| | Port location | Port size | | |
| SQ2000 | Side, Top | 1(P), 3(R) | 4(A), 2(B) | 12 stations (16 as a semi-standard) |


D-sub Connector (25 Pin)

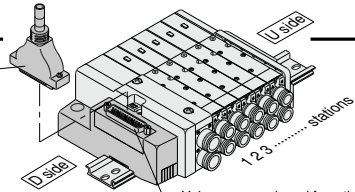

Cable Assembly

015
AXT100-DS25-030
050

(D-sub connector cable assemblies can be ordered with manifolds.)
Refer to manifold ordering.

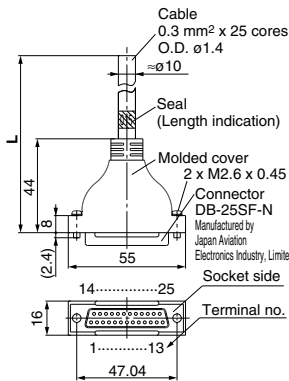

D-sub Connector Cable Assembly Terminal No.

| Terminal number | Lead wire color | Dot marking |
|-----------------|-----------------|-------------|
| 1 | Black | None |
| 2 | Brown | None |
| 3 | Red | None |
| 4 | Orange | None |
| 5 | Yellow | None |
| 6 | Pink | None |
| 7 | Blue | None |
| 8 | Purple | White |
| 9 | Gray | Black |
| 10 | White | Black |
| 11 | White | Red |
| 12 | Yellow | Red |
| 13 | Orange | Red |
| 14 | Yellow | Black |
| 15 | Pink | Black |
| 16 | Blue | White |
| 17 | Purple | None |
| 18 | Gray | None |
| 19 | Orange | Black |
| 20 | Red | White |
| 21 | Brown | White |
| 22 | Pink | Red |
| 23 | Gray | Red |
| 24 | Black | White |
| 25 | White | None |

D-sub Connector Cable Assembly

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|--------------------------------|
| 1.5 m | AXT100-DS25-015 | Cable |
| 3 m | AXT100-DS25-030 | 0.3 mm ² x 25 cores |
| 5 m | AXT100-DS25-050 | 25 cores |

* For other commercial connectors, use a 25 pins type with female connector conforming to MIL-C-24308.

* Cannot be used for transfer wiring.

* Lengths other than the above are also available. Please contact SMC for details.

Electric Characteristics

| Item | Characteristics |
|--------------------------------------|-----------------|
| Conductor resistance Ω/km, 20°C | 65 or less |
| Withstand voltage VAC, 1 min. | 1000 |
| Insulation resistance MΩ/km, 20°C | 5 or more |

(Note) The minimum bending radius for D-sub connector cable is 20 mm.


Connector manufacturers' example

- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- HIROSE ELECTRIC CO., LTD.

Electrical Wiring Specifications

* Valves are numbered from the D side.

D-sub connector



Connector terminal no.

As the standard electrical wiring specifications, double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station for 12 stations or less, regardless of valve and option types.



Mixed single and double wiring is available as an option.

For details, refer to page 813.

Lead wire colors for D-sub connector assembly (AXT100-DS25-015 to 050)

| Terminal no. | Polarity | Lead wire color | Dot marking |
|--------------|-------------------------|-----------------|-------------|
| 1 station | SOL _a 1 (-) | (+) Black | None |
| | SOL _b 14 (-) | (+) Yellow | Black |
| 2 stations | SOL _a 2 (-) | (+) Brown | None |
| | SOL _b 15 (-) | (+) Pink | Black |
| 3 stations | SOL _a 3 (-) | (+) Red | None |
| | SOL _b 16 (-) | (+) Blue | White |
| 4 stations | SOL _a 4 (-) | (+) Orange | None |
| | SOL _b 17 (-) | (+) Purple | None |
| 5 stations | SOL _a 5 (-) | (+) Yellow | None |
| | SOL _b 18 (-) | (+) Gray | None |
| 6 stations | SOL _a 6 (-) | (+) Pink | None |
| | SOL _b 19 (-) | (+) Orange | Black |
| 7 stations | SOL _a 7 (-) | (+) Blue | None |
| | SOL _b 20 (-) | (+) Red | White |
| 8 stations | SOL _a 8 (-) | (+) Purple | White |
| | SOL _b 21 (-) | (+) Brown | White |
| 9 stations | SOL _a 9 (-) | (+) Gray | Black |
| | SOL _b 22 (-) | (+) Pink | Red |
| 10 stations | SOL _a 10 (-) | (+) White | Black |
| | SOL _b 23 (-) | (+) Gray | Red |
| 11 stations | SOL _a 11 (-) | (+) White | Red |
| | SOL _b 24 (-) | (+) Black | White |
| 12 stations | SOL _a 12 (-) | (+) Yellow | Red |
| | SOL _b 25 (-) | (+) White | None |
| | COM. 13 (+) | (-) Orange | Red |

(Note) When using the negative common specifications, use valves for negative common.

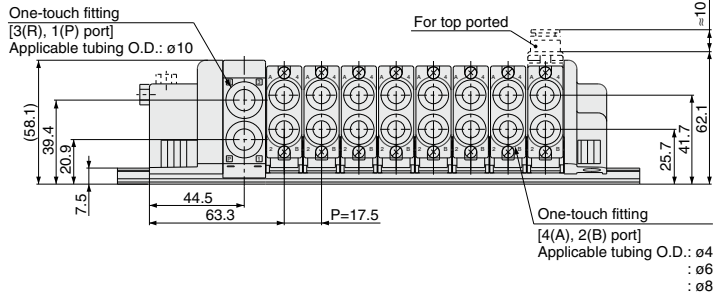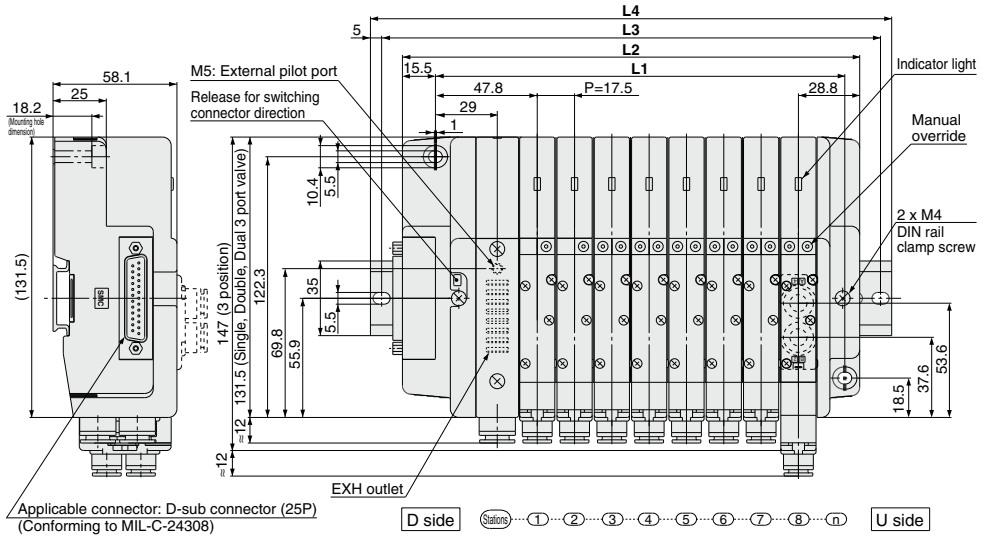


Dimensions

Formula: $L1 = 17.5n + 52$, $L2 = 17.5n + 74.5$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 69.5 | 87 | 104.5 | 122 | 139.5 | 157 | 174.5 | 192 | 209.5 | 227 | 244.5 | 262 | 279.5 | 297 | 314.5 | 332 |
| L2 | | 92 | 109.5 | 127 | 144.5 | 162 | 179.5 | 197 | 214.5 | 232 | 249.5 | 267 | 284.5 | 302 | 319.5 | 337 | 354.5 |
| L3 | | 112.5 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 262.5 | 275 | 287.5 | 312.5 | 325 | 350 | 362.5 | 375 |
| L4 | | 123 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 273 | 285.5 | 298 | 323 | 335.5 | 360.5 | 373 | 385.5 |

SQ2000 Series

P Kit (Flat Ribbon Cable Connector)



- Flat ribbon cable connector reduces installation labor for electrical connection.
- Using the connector for flat ribbon cable (26P, 20P) conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.

Manifold Specifications


| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|--|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 12 stations (16 as a semi-standard) |
| | | 4(A), 2(B) | |

Flat Ribbon Cable (26 Pins, 20 Pins)

Cable Assembly

AXT100-FC $\begin{matrix} 26 & 1 \\ 26 & 2 \\ 26 & 3 \end{matrix}$

(Type 26P flat ribbon cable connector assemblies can be ordered with manifolds. Refer to "How to Order manifold".)

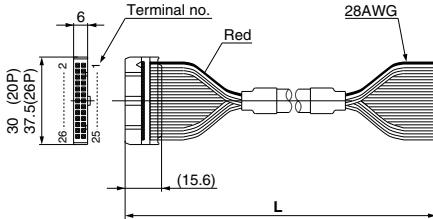


Flat Ribbon Cable Connector Assembly

| Cable length (L) | Assembly part no. | |
|------------------|-------------------|---------------|
| | 26P | 20P |
| 1.5 m | AXT100-FC26-1 | AXT100-FC20-1 |
| 3 m | AXT100-FC26-2 | AXT100-FC20-2 |
| 5 m | AXT100-FC26-3 | AXT100-FC20-3 |

- * For other commercial connectors, use a 26 pins or 20 pins with strain relief conforming to MIL-C-83503.
- * Cannot be used for movable wiring.
- * Lengths other than the above are also available. Please contact SMC for details.

Connector manufacturers' example


- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.



* Valves are numbered from the D side.

Electrical Wiring Specifications


Flat ribbon cable connector





Double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station, regardless of valve and option types. Mixed single and double wiring is available as an option. For details, refer to page 813.

Connector terminal no.

Triangle mark indicator position

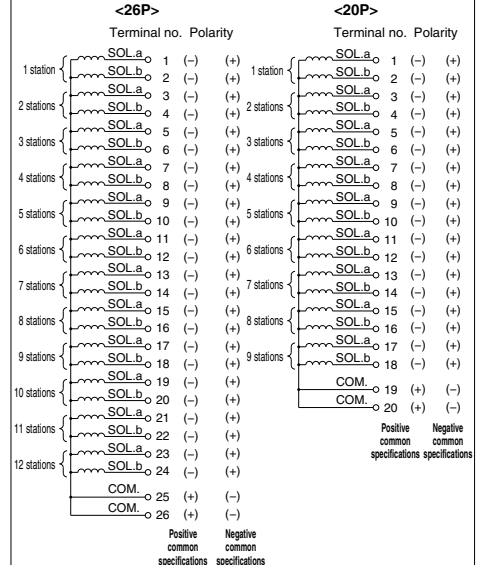

Note) When using the negative common specifications, use valves for negative common.

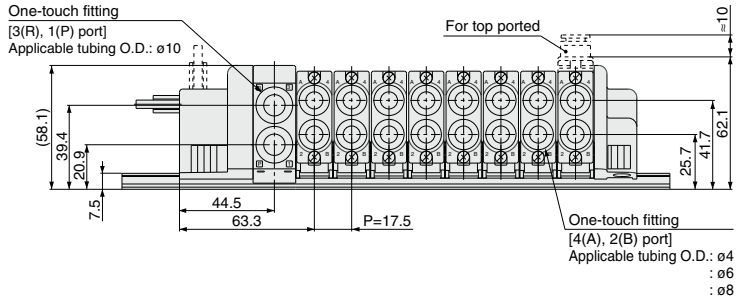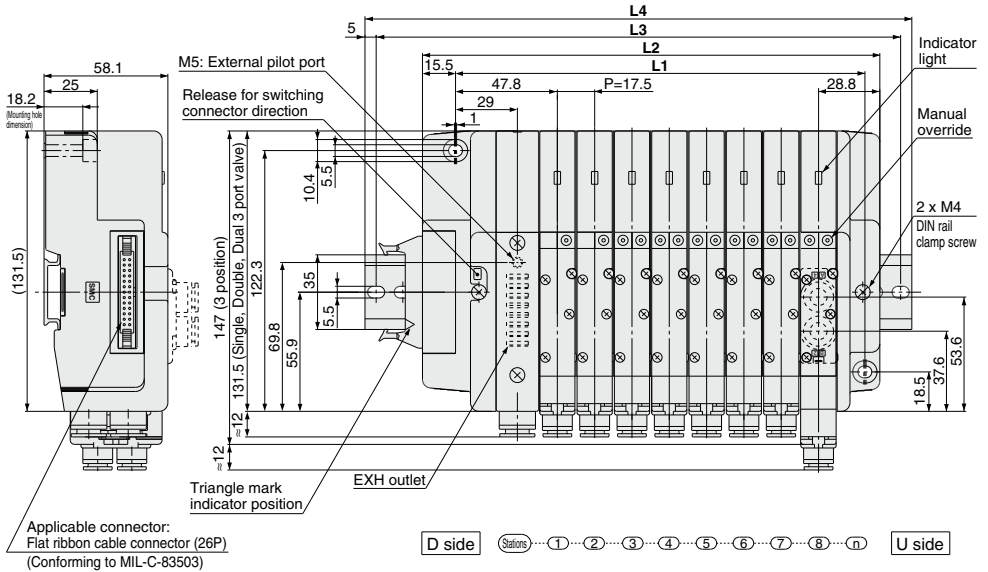

Dimensions

Formula: $L1 = 17.5n + 52$, $L2 = 17.5n + 74.5$ n: Stations (Maximum 16 stations)


| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 69.5 | 87 | 104.5 | 122 | 139.5 | 157 | 174.5 | 192 | 209.5 | 227 | 244.5 | 262 | 279.5 | 297 | 314.5 | 332 |
| L2 | | 92 | 109.5 | 127 | 144.5 | 162 | 179.5 | 197 | 214.5 | 232 | 249.5 | 267 | 284.5 | 302 | 319.5 | 337 | 354.5 |
| L3 | | 112.5 | 137.5 | 150 | 175 | 187.5 | 200 | 225 | 237.5 | 262.5 | 275 | 287.5 | 312.5 | 325 | 350 | 362.5 | 375 |
| L4 | | 123 | 148 | 160.5 | 185.5 | 198 | 210.5 | 235.5 | 248 | 273 | 285.5 | 298 | 323 | 335.5 | 360.5 | 373 | 385.5 |

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ
- VFS
- VFR
- VQ7

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series


T Kit (Terminal Block Box Kit)



- This kit has a small terminal box inside a junction box. The electrical entry port (G3/4) permits connection of conduit fittings.
- The maximum number of stations is 10 (16 as a semi-standard).

Manifold Specifications



| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|--|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 10 stations (16 as a semi-standard) |
| | | 4(A), 2(B) | |



* Valves are numbered from the D side.


Electrical Wiring Specifications

As the standard electrical wiring specifications, double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station for 10 stations or less, regardless of valve and option types. Mixed single and double wiring is available as an option. For details, refer to page 813.

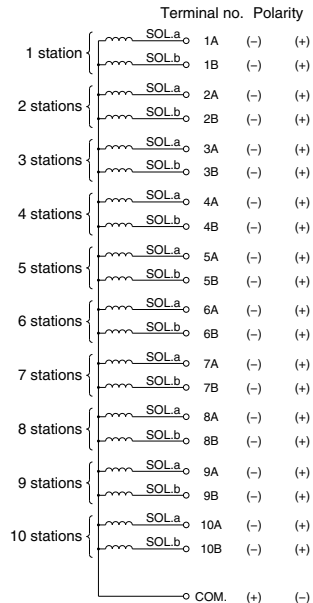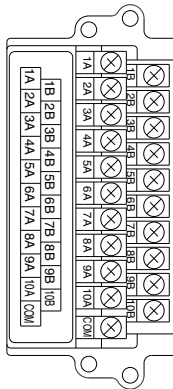

Positive common specifications Negative common specifications

Note) When using the negative common specifications, use valves for negative common.

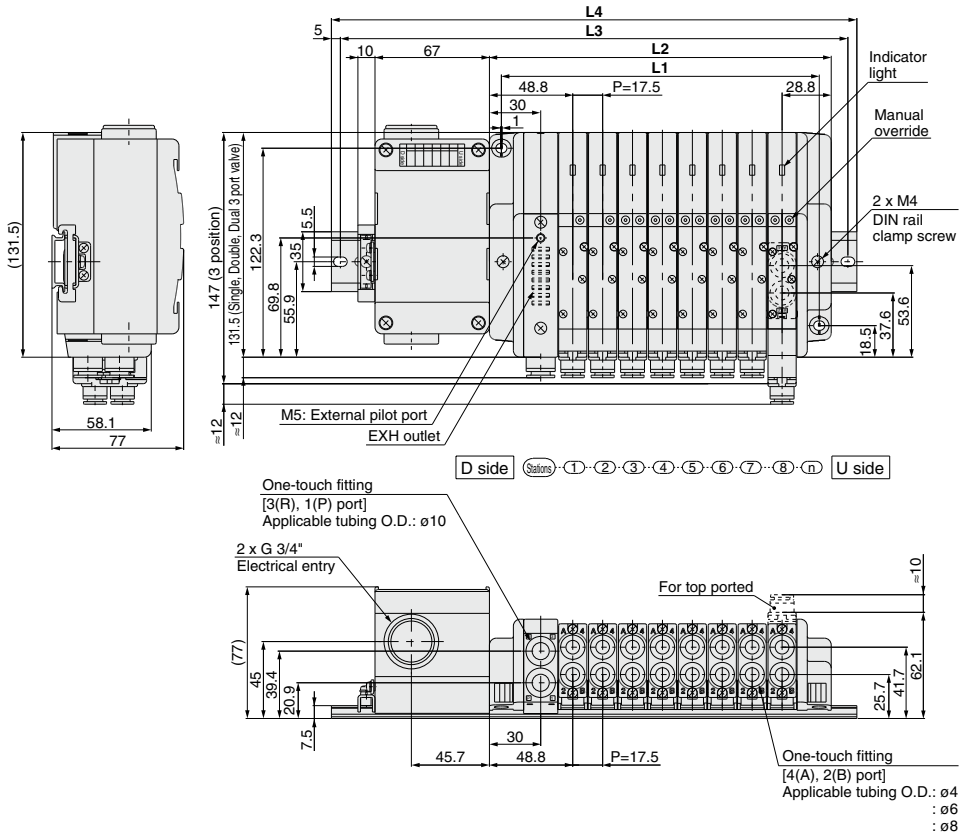

| |
|---------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |


Dimensions

Formula: $L1 = 17.5n + 46$, $L2 = 17.5n + 60$ n: Stations (Maximum 16 stations)

| L \ n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | |
|-----------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 63.5 | 81 | 98.5 | 116 | 133.5 | 151 | 168.5 | 186 | 203.5 | 221 | 238.5 | 256 | 273.5 | 291 | 308.5 | 326 | |
| L2 | 77.5 | 95 | 112.5 | 130 | 147.5 | 165 | 182.5 | 200 | 217.5 | 235 | 252.5 | 270 | 287.5 | 305 | 322.5 | 340 | |
| L3 | 175 | 200 | 212.5 | 237.5 | 250 | 262.5 | 287.5 | 300 | 325 | 337.5 | 350 | 375 | 387.5 | 412.5 | 425 | 437.5 | |
| L4 | DIN rail mounting | 185.5 | 210.5 | 223 | 248 | 260.5 | 273 | 298 | 310.5 | 335.5 | 348 | 360.5 | 385.5 | 398 | 423 | 435.5 | 448 |
| | Direct mounting | 160.5 | 173.0 | 198.0 | 210.5 | 235.5 | 248.0 | 260.5 | 285.5 | 298.0 | 323.0 | 335.5 | 348.0 | 373.0 | 385.5 | 410.5 | 423.0 |

SQ2000 Series


L Kit (Lead Wire Cable)



● Direct electrical entry type

Manifold Specifications



| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|----------------------------|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 4(A), 2(B) |
| | | C10 | C4, C6, C8 |



* Valves are numbered from the D side.



● Wiring Specifications: Positive Common Specifications

Three lead wires are included per station regardless of valves used. Among the three lead wires, the red wire is for COM.

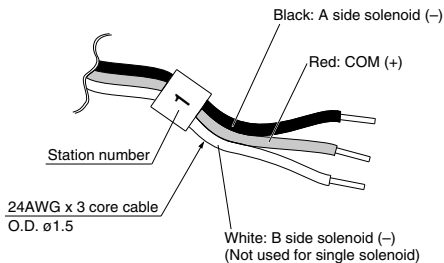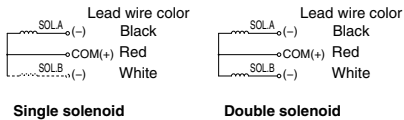

● Wiring Specifications: Negative Common Specifications (Semi-standard)

Three lead wires are included per station regardless of valves used. Among the three lead wires, the black wire is for COM.

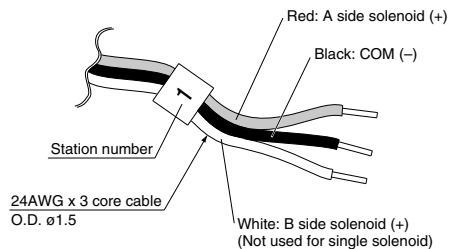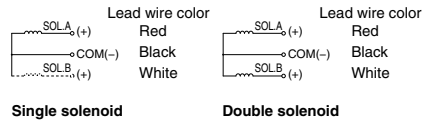

Note) When using the negative common specifications, use valves for negative common.

Negative Common Specifications

The following part numbers are for negative common specifications.

● How to order negative common valves (Example)

SQ2130 N -51-C6

┆ Negative common specifications

● How to order negative common manifold (Example)



SS5Q23-08|LD1N-D|N

┆ Stations

┆ Kit type

┆ Negative common specifications

┆ DIN rail mounting type

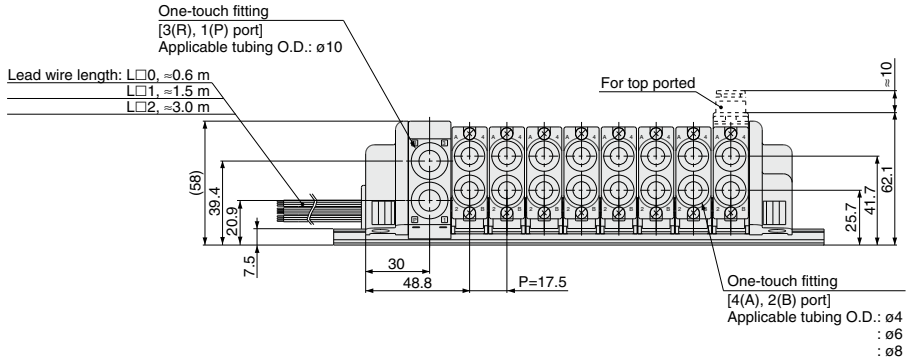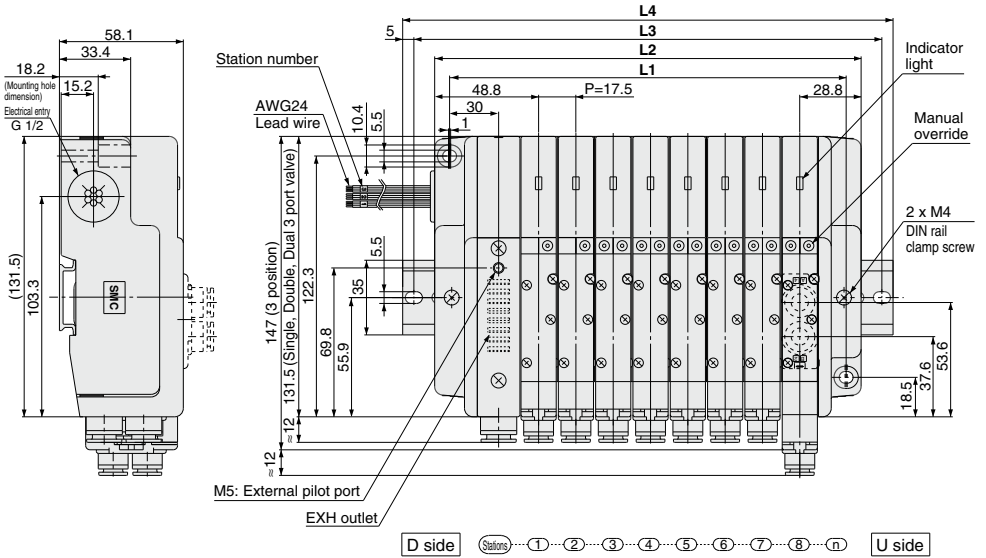


Dimensions Formula: $L1 = 17.5n + 46$, $L2 = 17.5n + 60$ n: Stations (Maximum 12 stations)

| L \ n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | 63.5 | 81 | 98.5 | 116 | 133.5 | 151 | 168.5 | 186 | 203.5 | 221 | 238.5 | 256 |
| L2 | 77.5 | 95 | 112.5 | 130 | 147.5 | 165 | 182.5 | 200 | 217.5 | 235 | 252.5 | 270 |
| L3 | 100 | 125 | 137.5 | 150 | 175 | 187.5 | 212.5 | 225 | 237.5 | 262.5 | 275 | 300 |
| L4 | 110.5 | 135.5 | 148 | 160.5 | 185.5 | 198 | 223 | 235.5 | 248 | 273 | 285.5 | 310.5 |

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7

SQ2000 Series

S Kit (Serial Transmission Unit) EX140 Integrated-type (For Output) Serial Transmission System





- The serial transmission system reduces wiring work, while minimizing wiring and saving space.
- The maximum number of stations is 8. (16 as a semi-standard). Only for type J2 and R2, the maximum stations are 4 (8 as a semi-standard).

Refer to Best Pneumatics No. 1-1 and the Operation Manual for the details of EX140 Integrated-type (For Output) Serial Transmission System.
Please download it via our website, <http://www.smcworld.com>

Manifold Specifications

| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|---------------------------------------|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 8 stations (16 as a semi-standard) |
| | | 4(A), 2(B) | |

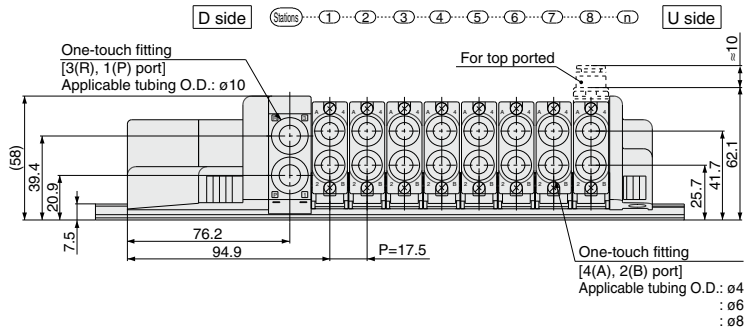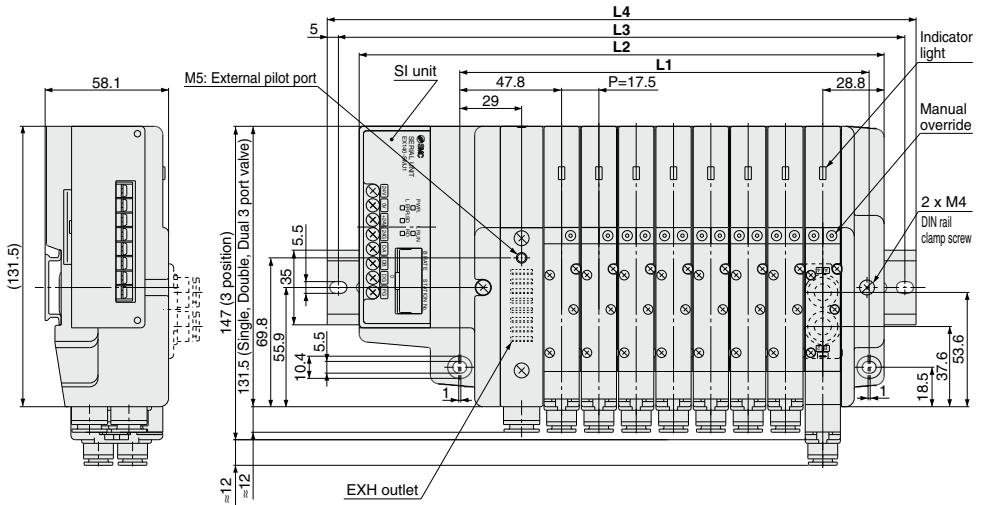

Dimensions

Formula: $L1 = 17.5n + 52$, $L2 = 17.5n + 106$ n: Stations (Maximum 16 stations)



| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 69.5 | 87 | 104.5 | 122 | 139.5 | 157 | 174.5 | 192 | 209.5 | 227 | 244.5 | 262 | 279.5 | 297 | 314.5 | 332 |
| L2 | | 123.5 | 141 | 158.5 | 176 | 193.5 | 211 | 228.5 | 246 | 263.5 | 281 | 298.5 | 316 | 333.5 | 351 | 368.5 | 386 |
| L3 | | 150 | 162.5 | 187.5 | 200 | 225 | 237.5 | 250 | 275 | 287.5 | 312.5 | 325 | 337.5 | 362.5 | 375 | 400 | 412.5 |
| L4 | | 160.5 | 173 | 198 | 210.5 | 235.5 | 248 | 260.5 | 285.5 | 298 | 323 | 335.5 | 348 | 373 | 385.5 | 410.5 | 423 |

Manifold Option Parts for SQ1000

Blanking plate

SSQ1000-10A-3

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.



Symbol



SUP/EXH block

SSQ1000-PR-3-C8-□

Port size

| | |
|-----------|-------------------------------|
| C8 | One-touch fittings for ø8 |
| N9 | One-touch fittings for ø5/16" |

Option

| | |
|------------|-------------------------------|
| Nll | Standard |
| R | External pilot specifications |
| S | Built-in silencer |

Note) When specifying both options, indicate "RS".


* Specify the spacer mounting position on the manifold specification sheet.

For standard type manifolds, the SUP/EXH block is mounted on the D side.


It is added to the manifold to increase SUP/EXH capacity.

* The number of SUP/EXH blocks that can be added is limited to two sets, one between manifold stations and another on the U side of the manifold due to the length of the internal lead wire.

* SUP/EXH blocks are not included in the number of manifold stations.



| | | Stations | | | | |
|-------------------|-------------------|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | ● | ● | ● | | |
| | ... | | | | | |
| Option | SUP/EXH block | | | | ● | |
| | SSQ1000-PR-3-C8-□ | | | | | |

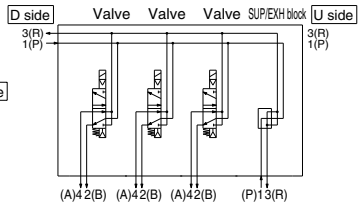

Individual SUP spacer

SSQ1000-P-3-C6

Port size

| | | |
|-------------|------------|------------------------------|
| Side ported | C6 | One-touch fittings for ø6 |
| Top ported | N7 | One-touch fittings for ø1/4" |
| Top ported | L6 | One-touch fittings for ø6 |
| Top ported | LN7 | One-touch fittings for ø1/4" |

This is used as a supply port for different pressures when using different pressures in the same manifold (for one station). Both sides of the station which is used with supply pressure from the individual SUP spacer are shut off. (Refer to application example.)

* Specify the spacer mounting position and SUP passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit. (Two pieces of SUP block plate that shut off the supply pressure are included with the individual SUP spacer, therefore, it is not necessary to order them separately.)

* Electrical wiring is also connected to the manifold station with the individual EXH spacer.


* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual SUP spacer to the individual EXH spacer).

* The number of spacers is not limited when ordered with the manifold. However, when adding individual SUP spacers later, it is limited to two units, and another on the U side due to the length of the internal lead wire.


* Part number with manifold block:

SSQ1000-P-3-C6-M


Side ported




Top ported



For top ported



| | | Stations | | | | |
|-------------------|--|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | ● | ● | ● | |
| | ... | | | | | |
| Option | Individual SUP spacer | | ● | | | |
| | SUP shut off position: Please specify. | ● | ● | | | |

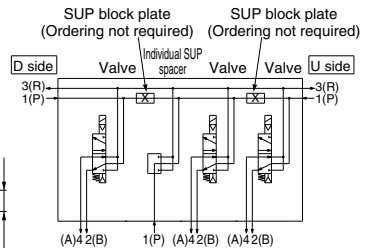

SQ1000 Series

Manifold Option Parts for SQ1000

Individual EXH spacer

SSQ1000-R-3-**C6**

Port size

| | | |
|-------------|------------|------------------------------------|
| Side ported | C6 | One-touch fittings for $\phi 6$ |
| | N7 | One-touch fittings for $\phi 1/4"$ |
| Top ported | L6 | One-touch fittings for $\phi 6$ |
| | LN7 | One-touch fittings for $\phi 1/4"$ |

This is used to exhaust an individual valve when the exhaust from a valve interferes with other stations in the circuit (used for one station).

Both sides of the station which is to be individually exhausted are shut off. (Refer to application example.)

* Specify the spacer mounting position and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit.

(Two pieces of EXH block plate that shut off the exhaust are included with the individual EXH spacer, therefore, it is not necessary to order them separately.)


* Electrical wiring is also connected to the manifold station with the individual EXH spacer.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual EXH spacer to the individual SUP spacer).


* The number of spacers is not limited when ordered with the manifold. However, when adding individual EXH spacers later, it is limited to two units, one between manifold stations and another on the U side due to the length of the internal lead wire.

* Model no. with manifold block:
SSQ1000-R-3-**C6-M**

Side ported




Top ported




Manifold block

For top ported



| Description/Model | Stations | | | | |
|------------------------|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual EXH spacer SSQ1000-R-3- C6 | | | | |
| EXH shut off position: | Please specify. | | | | |

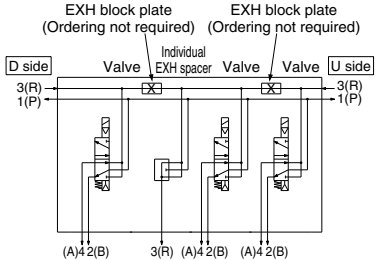

Individual SUP/EXH spacer

SSQ1000-PR1-3-**C6**

Port size

| | | |
|-------------|------------|------------------------------------|
| Side ported | C6 | One-touch fittings for $\phi 6$ |
| | N7 | One-touch fittings for $\phi 1/4"$ |
| Top ported | L6 | One-touch fittings for $\phi 6$ |
| | LN7 | One-touch fittings for $\phi 1/4"$ |

This has both functions of the individual SUP and EXH spacers above. (Refer to application example.)

* Specify the spacer mounting position and SUP and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions each for SUP and EXH can be specified per unit. (Two pieces each of block plate that shut off the SUP and EXH passages are included with the individual SUP/EXH spacer, therefore, it is not necessary to order them separately.)

* Electrical wiring is also connected to the manifold station with the individual SUP/EXH spacer.


* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later.

* The number of spacers is not limited when ordered with the manifold. However, when adding individual SUP/EXH spacers later, it is limited to two units, one between manifold stations and another on the U side due to the length of the internal lead wire.


* Model no. with manifold block:
SSQ1000-PR1-3-**C6-M**

* Do not install any back pressure check valve on the manifold station, on which the spacer is to be mounted. When installing the back pressure check valve on other manifold station, be sure to specify the manifold station position on the manifold specification sheet instead of ordering by specifying the manifold option symbol "B".

Side ported




Top ported




Manifold block

For top ported



| Description/Model | Stations | | | | |
|------------------------|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual SUP/EXH spacer SSQ1000-PR1-3- C6 | | | | |
| SUP shut off position: | Please specify. | | | | |
| EXH shut off position: | Please specify. | | | | |

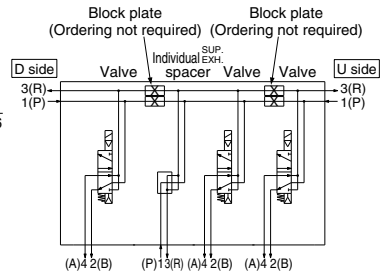

Manifold Option Parts for SQ1000

SUP block plate

SSQ1000-B-P


When supplying two different pressures, high and low, to one manifold, this is used between stations with different pressures. Also, it is used with an individual SUP spacer to shut off the air supply.

* Specify the station position on the manifold specification sheet.

<Block indication label>

When using block plates for SUP passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for SUP incorporated with the manifold, a block indication label is attached to the manifold.

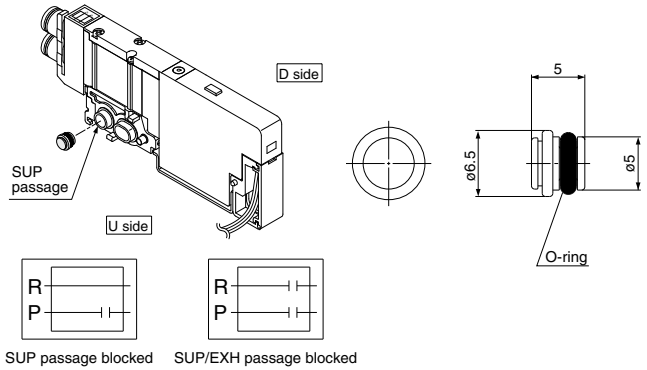

EXH block plate

SSQ1000-B-R

When the exhaust from a valve interferes with other stations in the circuit, this is used between stations to separate exhausts. Also, it is used with an individual EXH spacer to shut off the exhaust of individual valves.


* Specify the station position on the manifold specification sheet.

* Be sure to discharge the exhaust inside the EXH passage from the R port of the SUP/EXH block, etc. so that the exhaust pressure is not sealed.

<Block indication label>

When using block plates for EXH passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for EXH incorporated with the manifold, a block indication label is attached to the manifold.

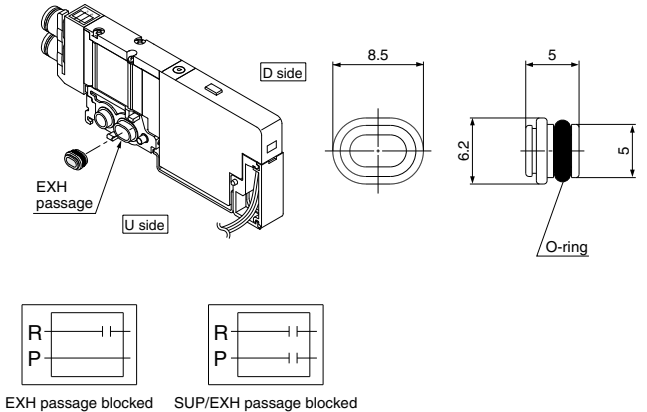


Back pressure check valve [-B]

SSQ1000-BP

It prevents cylinder malfunction caused by other valve exhaust. Insert it into R (EXH) port on the manifold side of a valve which is affected. It is effective when a single action cylinder is used or an exhaust center type solenoid valve is used.

* When a check valve for back pressure prevention is desired, and is to be installed only in certain manifold stations, clearly write the part number and specify the number of stations on the manifold specification sheet.

* When ordering this option incorporated with a manifold, suffix "-B" to the end of the manifold part number.

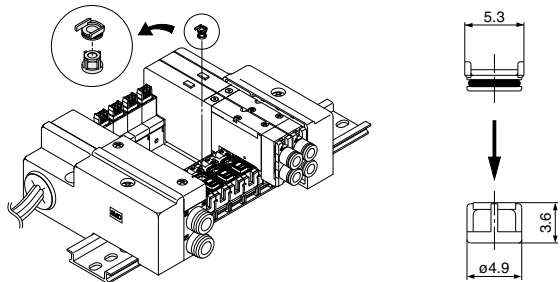

⚠ Caution

1. The manifold installed type back pressure check valve assembly is assembly parts with a check valve structure. However, since slight air leakage against the back pressure is allowed due to its structure, adverse effects of the back pressure due to increase in exhaust resistance cannot be prevented if the manifold exhaust port and other exhaust ports are put together for piping or if the piping diameter is narrowed. As a result, this may cause the actuator and air operated equipment to malfunction. So, be careful not to restrict the exhaust air. If the exhaust resistance becomes large, select a built-in valve type with rubber seal.
2. When a back pressure check valve is mounted, the effective area of the valve will decrease by about 20%.
3. Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.

| |
|-----------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Manifold Option Parts for SQ1000


Name plate [-N]

SSQ1000-N3-Stations (1 to maximum)

It is a transparent resin plate for placing a label that indicates solenoid valve function, etc.


Insert it into the groove on the side of the end plate and bend it as shown in the figure. Also, the plate is difficult to bend for manifolds with only a few stations, therefore, remove the silencer cover to install it.

* When ordering this option incorporated with a manifold, suffix "-N" to the end of the manifold part number.

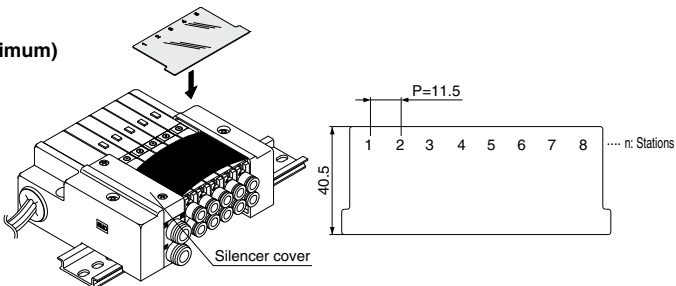


Blanking plug (For One-touch fitting)

23
KQ2P-04
06
08



It is inserted into an unused cylinder port and SUP/EXH ports.

Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ϕd | Model | A | L | D |
|-----------------------------------|---------|------|------|----|
| 3.2 | KQ2P-23 | 16 | 31.5 | 5 |
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |

Port plug

VVQZ100-CP

The plug is used to block the cylinder port when using a 5-port valve as a 3-port valve.

* Add "A" or "B" at the end of the valve part number when ordering with valves.

Example) SQ1131-51-C6-A (N.O. specifications)


↓ 4 (A) port plug

Example) SQ1131-51-C6-B (N.C. specifications)

↓ 2 (B) port plug

Example) SQ1131-51-C6-B-M

(B port plug with manifold block)

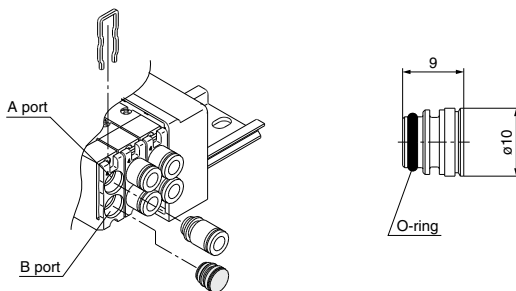


Direct EXH outlet, built-in silencer [-S]

This is a type with an exhaust port atop the manifold end plate. The built-in silencer exhibits an excellent noise suppression effect. (Noise reduction: 30 dB)

Note) A large quantity of drainage generated in the air source results in exhaust of air together with drainage.

* When ordering this option incorporated with a manifold, suffix "-S" to the end of the manifold part number.

* For precautions on handling and how to replace elements, refer to page 881.

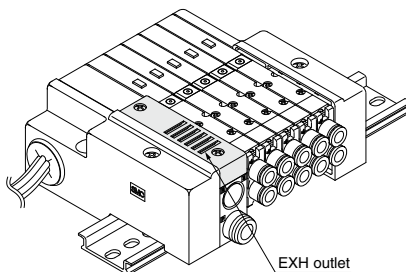


Manifold Option Parts for SQ1000

External pilot specifications [-R]

This can be used when the air pressure is 0.1 to 0.2 MPa lower than the minimum operating pressure of the solenoid valves or used for vacuum specifications.
 Add "R" to the part numbers of manifolds and valves to indicate the external pilot specification.
 An M5 port will be installed on the top side of the manifold's SUP/EXH block.

- How to order valves (Example)
 SQ1130 **R** -51-C6
 ↓
 External pilot specifications
- How to order manifold (Example)
 * Indicate "R" for an option.
 SS5Q13-08FD1-**DR**
 ↓
 External pilot specifications

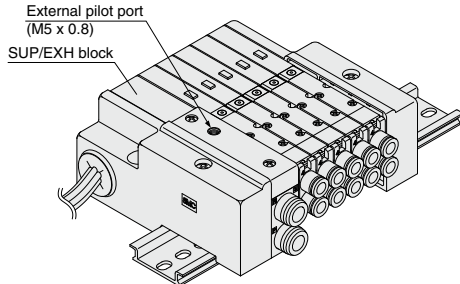

Note 1) Not applicable for 4 position dual 3 port valves.
 Note 2) Valves with the external pilot specifications have a pilot EXH with individual exhaust specifications and EXH can be pressurized. However, the pressure supplied from EXH should be 0.4 MPa or lower.


Dual flow fitting

SSQ1000-52A-**C8**


| | |
|------------------|--------|
| Port size | |
| C8 | ø8 |
| N9 | ø5/16" |

To drive a large bore cylinder, two valve stations are operated simultaneously to double the air flow.
 This fitting is used on the cylinder ports in this situation. Available sizes are ø8 and ø5/16" One-touch fittings.
 * When ordering with valves, specify the valve part number without One-touch fitting and list without One-touch fitting and list the dual flow fitting part number.

Example) Valve part number (without Onetouch fitting)
 SQ1131-51-**C8**..... 2 sets
 *SSQ1000-52A-**C8**..... 1 set





C8: One-touch fittings for ø8
 N9: One-touch fittings for ø5/16"

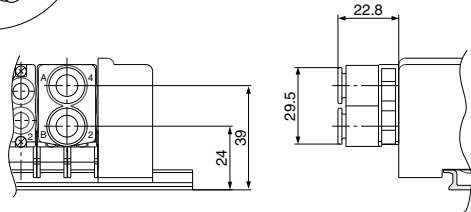

Silencer (For EXH port)

This is inserted into the centralized type EXH port (One-touch fitting).



Specifications

| Series | Model | Effective area mm ² (Cv factor) | Noise reduction (dB) |
|---------------|----------|--|----------------------|
| SQ1000 | AN15-C08 | 20 (1.1) | 30 |

- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- VQ**
- 1/2**
- VQ**
- 4/5**
- VQC**
- 1/2**
- VQC**
- 4/5**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**



SQ2000 Series

Manifold Option Parts for SQ2000

Blanking plate

SSQ2000-10A-3

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.



Symbol



SUP/EXH block

SSQ2000-PR-3-C10-□

Port size

| | |
|------------|--------------------------------------|
| C8 | One-touch fittings for $\phi 8$ |
| C10 | One-touch fittings for $\phi 10$ |
| N9 | One-touch fittings for $\phi 5/16''$ |
| N11 | One-touch fittings for $\phi 3/8''$ |


Note) When specifying both options, indicate "RS".

- * Specify the spacer mounting position on the manifold specification sheet.
- For standard type manifolds, the SUP/EXH block is mounted on the D side. It is added to the manifold to increase SUP/EXH capacity.


- * The number of SUP/EXH blocks that can be added is limited to two sets, one between manifold stations and another on the U side of the manifold due to the length of the internal lead wire.
- * SUP/EXH blocks are not included in the number of manifold stations.

Option

| | |
|------------|-------------------------------|
| Nil | Standard |
| R | External pilot specifications |
| S | Built-in silencer |



| | | Stations | | | | |
|-------------------|--------------------|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | ● | ● | ● | | |
| | ... | | | | | |
| Option | SUP/EXH block | | | | ● | |
| | SSQ2000-PR-3-C10-□ | | | | | |

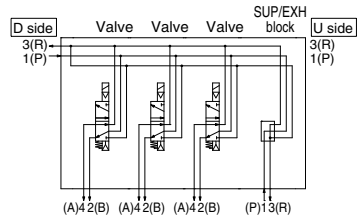

Individual SUP spacer


SSQ2000-P-3-C8

Port size


| | | |
|-------------|------------|--------------------------------------|
| Side ported | C8 | One-touch fittings for $\phi 8$ |
| Top ported | N9 | One-touch fittings for $\phi 5/16''$ |
| Top ported | L8 | One-touch fittings for $\phi 8$ |
| Top ported | LN9 | One-touch fittings for $\phi 5/16''$ |

- This is used as a supply port for different pressures when using different pressures in the same manifold (for one station).
- Both sides of the station which is used with supply pressure from the individual SUP spacer are shut off. (Refer to application example.)
- * Specify the spacer mounting position and SUP passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit. (Two pieces of SUP block plate that shut off the supply pressure are included with the individual SUP spacer, therefore, it is not necessary to order them separately.)
- * Electrical wiring is also connected to the manifold station with the individual SUP spacer.
- * By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual SUP spacer to the individual EXH spacer).
- * The number of spacers is not limited when ordered with the manifold. However, when adding individual SUP spacers later, it is limited to two units, and another on the U side due to the length of the internal lead wire.
- * Model no. with manifold block: SSQ2000-P-3-C8-M


Side ported




Top ported



For top ported



| | | Stations | | | | |
|-------------------|--|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | ● | ● | ● | | |
| | ... | | | | | |
| Option | Individual SUP spacer | | | ● | | |
| | SUP shut off position: Please specify. | ● | ● | | | |

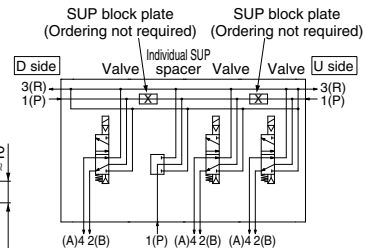

Manifold Option Parts for SQ2000

Individual EXH spacer

SSQ2000-R-3-C8

● **Port size**

| | | |
|-------------|------------|-------------------------------|
| Side ported | C8 | One-touch fittings for ø8 |
| Top ported | N9 | One-touch fittings for ø5/16" |
| Top ported | L8 | One-touch fittings for ø8 |
| Top ported | LN9 | One-touch fittings for ø5/16" |

This is used to exhaust an individual valve when the exhaust from a valve interferes with other stations in the circuit (used for one station).

Both sides of the station which is to be individually exhausted are shut off. (Refer to application example.)

* Specify the spacer mounting position and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit. (Four pieces of EXH block plate that shut off the exhaust are included with the individual EXH spacer, therefore, it is not necessary to order them separately.)


* Electrical wiring is also connected to the manifold station with the individual EXH spacer.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual EXH spacer to the individual SUP spacer).


* The number of spacers is not limited when ordered with the manifold. However, when adding individual EXH spacers later, it is limited to two units, one between manifold stations and another on the U side due to the length of the internal lead wire.

* Model no. with manifold block:
SSQ2000-R-3-C8-M


Side ported




Top ported



For top ported



| Description/Model | Stations | | | | |
|-------------------|--|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual EXH spacer SSQ2000-R-3-C8 | | | | |
| Option | EXH shut off position: Please specify. | | | | |

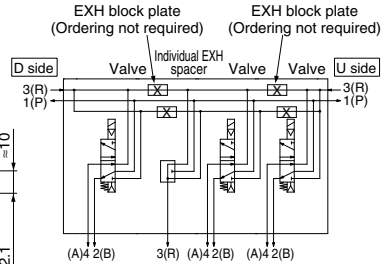

Individual SUP/EXH spacer

SSQ2000-PR1-3-C8

● **Port size**

| | | |
|-------------|------------|-------------------------------|
| Side ported | C8 | One-touch fittings for ø8 |
| Top ported | N9 | One-touch fittings for ø5/16" |
| Top ported | L8 | One-touch fittings for ø8 |
| Top ported | LN9 | One-touch fittings for ø5/16" |

This has both functions of the individual SUP and EXH spacers above. (Refer to application example.)

* Specify the spacer mounting position and SUP and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions each for SUP and EXH can be specified per unit. (Block plates that shut off the SUP and EXH passages are included with the individual SUP/EXH spacer, therefore, it is not necessary to order them separately (2 pcs. of SUP block plate and 4 pcs. of EXH block plate).)

* Electrical wiring is also connected to the manifold station with the individual SUP/EXH spacer.


* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later.

* The number of spacers is not limited when ordered with the manifold. However, when adding individual SUP/EXH spacers later, it is limited to two units, one between manifold stations on the U side due to the length of the internal lead wire.


* Model no. with manifold block:
SSQ2000-PR1-3-C8-M

* Do not install any back pressure check valve on the manifold station, on which the spacer is to be mounted. When installing the back pressure check valve on other manifold station, be sure to specify the manifold station position on the manifold specification sheet instead of ordering by specifying the manifold option symbol "B".


Side ported




Top ported



For top ported



| Description/Model | Stations | | | | |
|-------------------|--|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual SUP/EXH spacer SSQ2000-PR1-3-C8 | | | | |
| Option | SUP shut off position: Please specify. | | | | |
| Option | EXH shut off position: Please specify. | | | | |

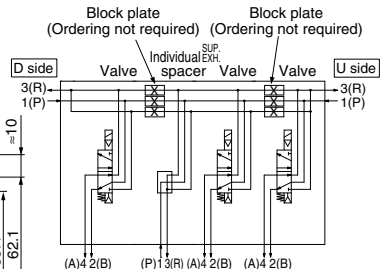

SQ2000 Series

Manifold Option Parts for SQ2000

SUP block plate

SSQ1000-B-R


When supplying two different pressures, high and low, to one manifold, this is used between stations with different pressures. Also, it is used with an individual SUP spacer to shut off the air supply.

* Specify the station position on the manifold specification sheet.

<Block indication label>

When using block plates for SUP passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for SUP incorporated with the manifold, a block indication label is attached to the manifold.

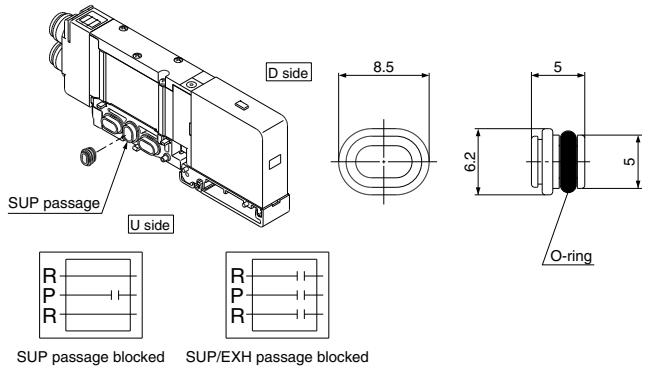

EXH block plate

SSQ2000-B-R

When the exhaust from a valve interferes with other stations in the circuit, this is used between stations to separate exhausts. Also, it is used with an individual EXH spacer to shut off the exhaust of individual valves.


* Specify the station position on the manifold specification sheet.

* Be sure to discharge the exhaust inside the EXH passage from the R port of the SUP/EXH block, etc. so that the exhaust pressure is not sealed.

<Block indication label>

When using block plates for EXH passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for EXH incorporated with the manifold, a block indication label is attached to the manifold.

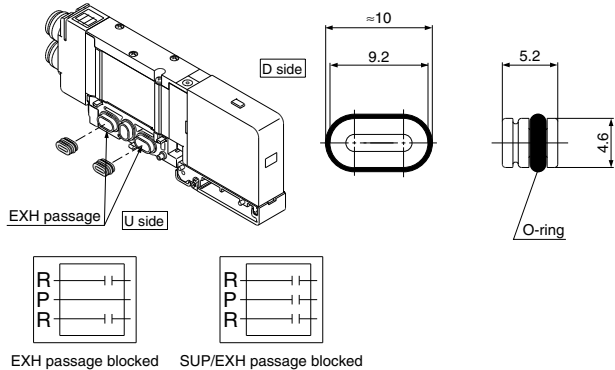


Back pressure check valve [-B]

SSQ2000-BP

It prevents cylinder malfunction caused by other valve exhaust. Insert it into R (EXH) port on the manifold side of a valve which is affected. It is effective when a single action cylinder is used or an exhaust center type solenoid valve is used.

* When a check valve for back pressure prevention is desired, and is to be installed only in certain manifold stations, clearly write the part number and specify the number of stations on the manifold specification sheet.

* When ordering this option incorporated with a manifold, suffix "-B" to the end of the manifold part number.

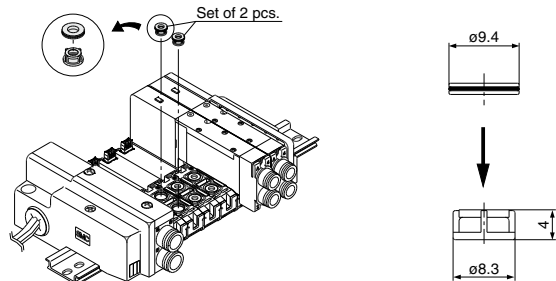

⚠ Caution

1. The manifold installed type back pressure check valve assembly is assembly parts with a check valve structure. However, since slight air leakage against the back pressure is allowed due to its structure, adverse effects of the back pressure due to increase in exhaust resistance cannot be prevented if the manifold exhaust port and other exhaust ports are put together for piping or if the piping diameter is narrowed. As a result, this may cause the actuator and air operated equipment to malfunction. So, be careful not to restrict the exhaust air. If the exhaust resistance becomes large, select a built-in valve type with rubber seal.
2. When a back pressure check valve is mounted, the effective area of the valve will decrease by about 20%.

Manifold Option Parts for SQ2000


Name plate [-N]

SSQ2000-N3- Stations (1 to maximum)

It is a transparent resin plate for placing a label that indicates solenoid valve function, etc.


Insert it into the groove on the side of the end plate and bend it as shown in the figure. Also, the plate is difficult to bend for manifolds with only a few stations, therefore, remove the silencer cover to install it.

* When ordering this option incorporated with a manifold, suffix "-N" to the end of the manifold part number.

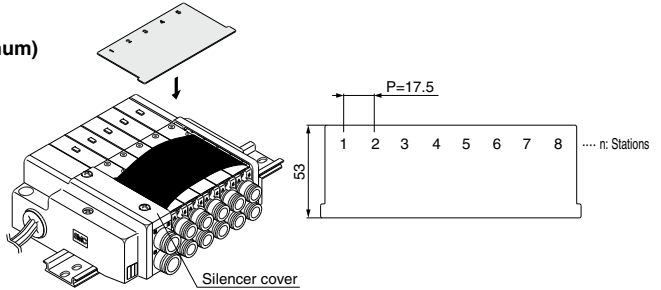


Blanking plug (For One-touch fitting)

04
KQ2P-06
08
10



It is inserted into an unused cylinder port and SUP/EXH ports.

Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ϕd | Model | A | L | D |
|-----------------------------------|---------|------|----|----|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |

Port plug

VVQZ2000-CP

The plug is used to block the cylinder port when using a 5-port valve as a 3-port valve.

* Add "A" or "B" at the end of the valve part number when ordering with valves.

Example) SQ2131-51-C8-A (N.O. specifications)



↓ 4 (A) port plug

Example) SQ2131-51-C8-B (N.C. specifications)

↓ 2 (B) port plug

Example) SQ2131-51-C8-B-M

(B port plug with manifold block)




Direct EXH outlet, built-in silencer [-S]

This is a type with an exhaust port atop the manifold end plate. The built-in silencer exhibits an excellent noise suppression effect. (Noise reduction: 30 dB)

Note) A large quantity of drainage generated in the air source results in exhaust of air together with drainage.

* When ordering this option incorporated with a manifold, suffix "-S" to the end of the manifold part number.

* For precautions on handling and how to replace elements, refer to page 881.

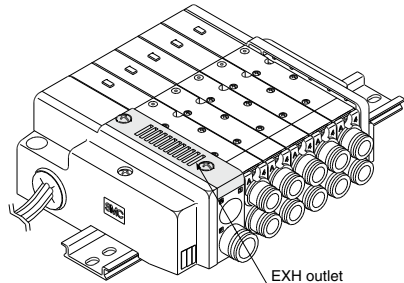

SV

SYJ

SZ

VF

VP4

VQ

1/2

VQ

4/5

VQC

1/2

VQC

4/5

VQZ

SQ

VFS

VFR

VQ7

SQ2000 Series

Manifold Option Parts for SQ2000

External pilot specifications [-R]


This can be used when the air pressure is 0.1 to 0.2 MPa lower than the minimum operating pressure of the solenoid valves or used for vacuum specifications.

Add "R" to the part numbers of manifolds and valves to indicate the external pilot specifications.

An M5 port will be installed on the top side of the manifold's SUP/EXH block.

- How to order valves (Example)
SQ2130 R -51-C6
↓ External pilot specifications

- How to order manifold (Example)
* Indicate "R" for an option.
SS5Q23-08FD1-DR
↓ External pilot specifications

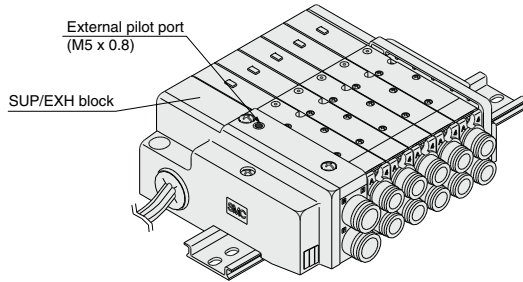

Note 1) Not applicable for dual 3 port valves.

Note 2) Valves with the external pilot specifications have a pilot EXH with individual exhaust specifications and EXH can be pressurized. However, the pressure supplied from EXH should be 0.4 MPa or lower.

Dual flow fitting

SSQ2000-52A-C10


| | |
|-------------|-------|
| ● Port size | |
| C10 | ø10 |
| N11 | ø3/8" |

To drive a large bore cylinder, two valve stations are operated simultaneously to double the air flow. This fitting is used on the cylinder ports in this situation. Available sizes are ø10 and ø3/8" One-touch fittings.



* When ordering with valves, specify the valve part number without One-touch fitting and list without One-touch fitting and list the dual flow fitting part number.

Example) Valve part number (without One-touch fitting)

SQ2131-51-C10..... 2 sets
* SSQ2000-52A-C10..... 1 set





C10: One-touch fitting for ø10
N11: One-touch fitting for ø3/8"



Silencer (For EXH port)

This is inserted into the centralized type EXH port (One-touch fitting).

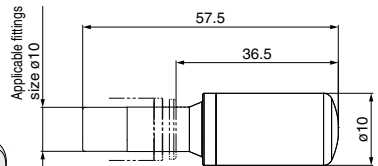

Specifications

| Series | Model | Effective area (mm ²) (Cv factor) | Noise reduction (dB) |
|--------|----------|--|-------------------------|
| SQ2000 | AN20-C10 | 30 (1.6) | 30 |

Manifold Option for SQ1000/2000

Special Wiring Specifications

In the internal wiring of F kit, P kit, T kit and S kit, double wiring (connected to SOL. A and SOL. B) is adopted for each station regardless of the valve and option types. Mixed single and double wiring is available as an option.

1. How to Order

Indicate option symbol "K" in the manifold part number and be sure to specify station positions for single or double wiring on the manifold specification sheet. Also, specify wiring for spare connectors.


(Up to two spare connectors are included depending on the remaining number of connector pins. When the wiring for the spare connectors is not specified, they will be wired according to "Spare Connector Wiring" on page 816.)

Example) **SS5Q13 - 09 | FD0 | DKS**

↓ Others, option symbols: to be indicated alphabetically.


2. Wiring specifications

Connector terminal numbers are connected from solenoid station 1 on the A side in the order indicated by the arrows without skipping any terminal numbers.




F kit

D-sub connector
(For 25P)




P kit

Flat ribbon cable connector
(For 26P)



P kit

Flat ribbon cable connector
(For 20P)



T kit

Terminal block
(SQ2000 only)

For S kit (serial transmission kit), refer to page 821.

3. Maximum stations

The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. Determine the number of stations so that the total number of solenoids is no more than the maximum points in the table below.

| Kit | F kit (D-sub connector) | P kit (Flat ribbon cable connector) | | T kit (Terminal block) SQ2000 only* | S kit (Serial) |
|-------------|-----------------------------------|---|------------|--|--------------------------|
| Type | FD□ 25P | PD□ 26P | PDC 20P | TD0 | SD□ |
| Max. points | 24 points | 24 points | 18 points | 20 points | 16 points |

Note) Maximum stations ... SQ1000: 24 stations
SQ2000: 16 stations

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000/2000 Series

Manifold Option for SQ1000/2000

Special DIN Rail Length (DIN Rail Mounting (-D) Only)

The standard DIN rail provided is approximately 30 mm longer than the overall length of the manifold with a specified number of stations. The following options are also available.

● DIN rail length longer than the standard type (for stations to be added later, etc.)

In the manifold part number, specify "D" for the manifold mounting symbol and add the number of required stations after the symbol.

Example) **SS5Q13-08FD0-D09BNK**




● Ordering DIN rail only

DIN rail part number

AXT100-DR-n

Note) For "n", enter a number from the "No." line in the table below.
For L dimension, refer to the dimensions of each kit.

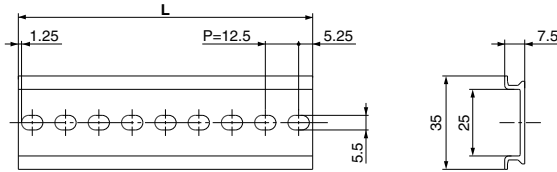

L Dimension

$$L = 12.5 \times n + 10.5$$

| | | | | | | | | | | |
|-------------|----|------|----|------|----|------|----|-------|-----|-------|
| No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| L dimension | 23 | 35.5 | 48 | 60.5 | 73 | 85.5 | 98 | 110.5 | 123 | 135.5 |


| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| L dimension | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 |

| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| L dimension | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 |

| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 |
| L dimension | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 | 473 | 485.5 | 498 | 510.5 |

Direct Mounting Type (-E)

Manifold is mounted by using mounting holes of both sides of the manifold.
DIN rail is not sticking out of the edge of end plate. (Except SQ2000 T kit type. Refer to pages 798 and 799.)
Furthermore, the reinforcing part that comes to the bottom of the DIN rail is attached to the end plate assembly.

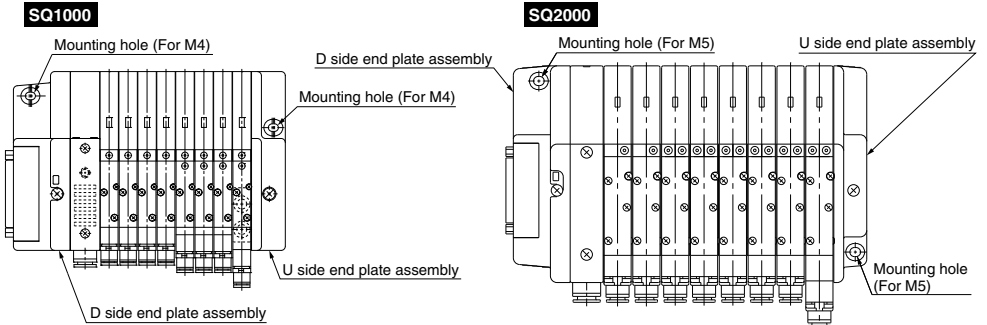

Manifold Option for SQ1000/2000

Negative Common Specifications

The following valve part numbers are for negative common specifications. Manifold part numbers are the same as the standard except L kit. Also, negative common specifications are not available for the S kit.

● How to order negative common valves (Example)

SQ1130 **N** -51-C6
 ↓ Negative common specifications

● How to order negative common manifold (Example)

SS5Q13 -**08****LD1** **N** -**D****N**
 ↓ Stations ↓ Option
 ↓ Kit type ↓ DIN rail mounting type
 ↓ Negative common specifications

Inch-size One-touch Fittings

For One-touch fittings in inch sizes, use the following part numbers. Also, the color of the release button is orange.

● How to order valves (Example)

SQ1130- 51 - **N7**

| Port location | |
|---------------|-------------|
| Nil | Side ported |
| L | Top ported |

| Symbol | Cylinder port | | | |
|-------------------------------|---------------|--------|-------|--------|
| | N1 | N3 | N7 | N9 |
| Applicable tubing O.D. (Inch) | ø1/8" | ø5/32" | ø1/4" | ø5/16" |
| 4(A), | ● | ● | ● | — |
| 2(B) port | — | ● | ● | ● |
| | SQ1000 | | | |
| | SQ2000 | | | |

● How to order manifold (Example)

Add "00T" at the end of the part number.

SS5Q13-**08****FD0**-**DN**- **00T**
 ↓ 1 (P), 3 (R) port in inch size
 { SQ1000: ø5/16" (N9)
 { SQ2000: ø3/8" (N11)

| |
|-----------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000/2000 Series

How to Increase Manifold Stations for SQ1000/2000

1. Using Spare Connector to Add Stations

As shown in the table below, wiring specifications for spare connectors are based on to the remaining number of connector pins (remaining number of pins against the maximum number of solenoids for each kit.)

The following steps are for using spare connectors to add stations.

• Spare Connector Wiring


| Remaining connector pins | 4 pins or more | 3 pins | 2 pins | 1 pin | 0 pin |
|--------------------------|---------------------|--|---------------------|---------------------|-------|
| Spare connector wiring | 2 for double wiring | 1 for double wiring (on the low no. station side) 1 for single wiring | 1 for double wiring | 1 for single wiring | None |

What to order

- Valves with manifold block (refer to pages 767 and 787) or the manifold blocks (Refer to page 817).

Steps for adding stations

- ① Loosen the clamp screw on the U side end plate and open the manifold.
- ② Mount the manifold block to be added.
- ③ Open the junction cover and attach the spare connector. Match the station position of the added station and the spare connector station number.
- ④ Press on the end plate to eliminate any space between the manifold blocks and tighten the clamp screw.
(Proper tightening torque: 0.8 to 1.0 N·m)
Note 1) Order a manifold block with lead wire for the L kit because a spare connector is not included with the kit. (Refer to page 817.)
Note 2) Do not let the lead wires get caught between manifolds, or when closing the junction cover.


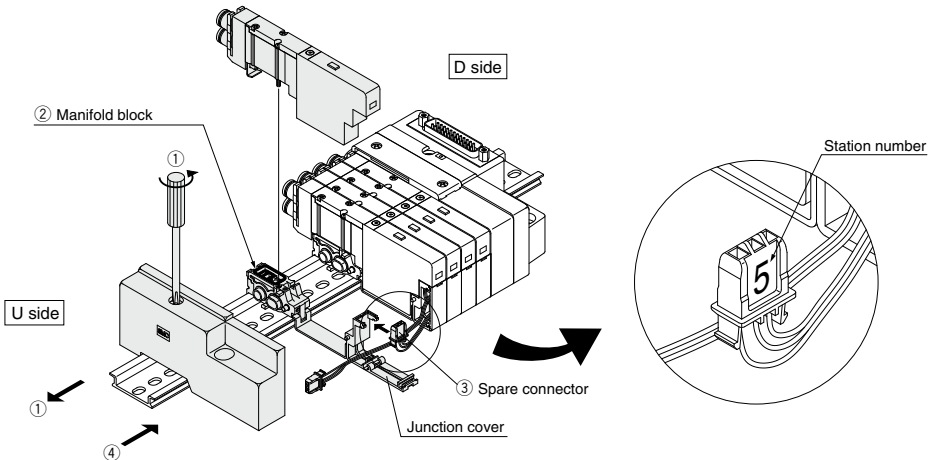


How to Increase Manifold Stations for SQ1000/2000

2. Adding Stations Without Required Spare Connectors

Spare connectors for 2 stations are initially included. However, to add 3 or more stations, order manifold blocks with lead wire in the tables below.

How to order manifold blocks with lead wire
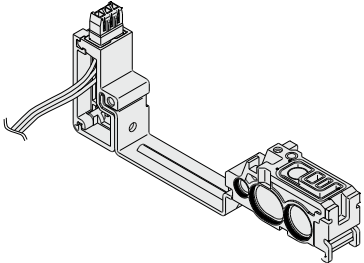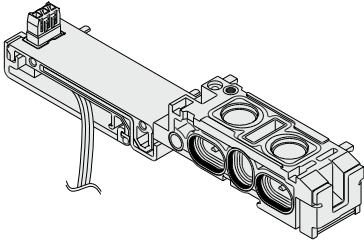
| SQ1000 | SQ2000 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|-----------|--|---|--|--|--|-----------------|--|---------------------------|---|-------------------------------|---|-----------|---|-----------|--|-----------|--|---|-----------|---|-----------|--|-----------|--|-----------|--|-----------|--|-----------|---|-----------|---|-----------|---|-----------|---|-----------|---|-----------|--|-----------|--|
|  |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>SSQ1000-1A-3-FS03 - - </p> | <p>SSQ2000-1A-3-FS03 - - </p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Lead wire type ●</p> | <p>Lead wire type ●</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">F0</td><td>Without lead wire (for using spare connectors to add stations)</td></tr> <tr><td style="text-align: center;">FS</td><td>F kit (D-sub connector kit) Single wiring</td></tr> <tr><td style="text-align: center;">FW</td><td>F kit (D-sub connector kit) Double wiring</td></tr> <tr><td style="text-align: center;">PS</td><td>P kit (Flat ribbon cable kit) Single wiring</td></tr> <tr><td style="text-align: center;">PW</td><td>P kit (Flat ribbon cable kit) Double wiring</td></tr> <tr><td style="text-align: center;">L0</td><td>L kit (Lead wire kit) Lead wire length 0.6 m</td></tr> <tr><td style="text-align: center;">L1</td><td>L kit (Lead wire kit) Lead wire length 1.5 m</td></tr> <tr><td style="text-align: center;">L2</td><td>L kit (Lead wire kit) Lead wire length 3.0 m</td></tr> <tr><td style="text-align: center;">SS</td><td>S kit (Serial transmission kit) Single wiring</td></tr> <tr><td style="text-align: center;">SW</td><td>S kit (Serial transmission kit) Double wiring</td></tr> </table> | F0 | Without lead wire (for using spare connectors to add stations) | FS | F kit (D-sub connector kit) Single wiring | FW | F kit (D-sub connector kit) Double wiring | PS | P kit (Flat ribbon cable kit) Single wiring | PW | P kit (Flat ribbon cable kit) Double wiring | L0 | L kit (Lead wire kit) Lead wire length 0.6 m | L1 | L kit (Lead wire kit) Lead wire length 1.5 m | L2 | L kit (Lead wire kit) Lead wire length 3.0 m | SS | S kit (Serial transmission kit) Single wiring | SW | S kit (Serial transmission kit) Double wiring | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">F0</td><td>Without lead wire (for using spare connectors to add stations)</td></tr> <tr><td style="text-align: center;">FS</td><td>F kit (D-sub connector kit) Single wiring</td></tr> <tr><td style="text-align: center;">FW</td><td>F kit (D-sub connector kit) Double wiring</td></tr> <tr><td style="text-align: center;">PS</td><td>P kit (Flat ribbon cable kit) Single wiring</td></tr> <tr><td style="text-align: center;">PW</td><td>P kit (Flat ribbon cable kit) Double wiring</td></tr> <tr><td style="text-align: center;">TS</td><td>T kit (Terminal block kit) Single wiring</td></tr> <tr><td style="text-align: center;">TW</td><td>T kit (Terminal block kit) Double wiring</td></tr> <tr><td style="text-align: center;">L0</td><td>L kit (Lead wire kit) Lead wire length 0.6 m</td></tr> <tr><td style="text-align: center;">L1</td><td>L kit (Lead wire kit) Lead wire length 1.5 m</td></tr> <tr><td style="text-align: center;">L2</td><td>L kit (Lead wire kit) Lead wire length 3.0 m</td></tr> <tr><td style="text-align: center;">SS</td><td>S kit (Serial transmission kit) Single wiring</td></tr> <tr><td style="text-align: center;">SW</td><td>S kit (Serial transmission kit) Double wiring</td></tr> </table> | F0 | Without lead wire (for using spare connectors to add stations) | FS | F kit (D-sub connector kit) Single wiring | FW | F kit (D-sub connector kit) Double wiring | PS | P kit (Flat ribbon cable kit) Single wiring | PW | P kit (Flat ribbon cable kit) Double wiring | TS | T kit (Terminal block kit) Single wiring | TW | T kit (Terminal block kit) Double wiring | L0 | L kit (Lead wire kit) Lead wire length 0.6 m | L1 | L kit (Lead wire kit) Lead wire length 1.5 m | L2 | L kit (Lead wire kit) Lead wire length 3.0 m | SS | S kit (Serial transmission kit) Single wiring | SW | S kit (Serial transmission kit) Double wiring |
| F0 | Without lead wire (for using spare connectors to add stations) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FS | F kit (D-sub connector kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FW | F kit (D-sub connector kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PS | P kit (Flat ribbon cable kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PW | P kit (Flat ribbon cable kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L0 | L kit (Lead wire kit) Lead wire length 0.6 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L1 | L kit (Lead wire kit) Lead wire length 1.5 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L2 | L kit (Lead wire kit) Lead wire length 3.0 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SS | S kit (Serial transmission kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SW | S kit (Serial transmission kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F0 | Without lead wire (for using spare connectors to add stations) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FS | F kit (D-sub connector kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FW | F kit (D-sub connector kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PS | P kit (Flat ribbon cable kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PW | P kit (Flat ribbon cable kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TS | T kit (Terminal block kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TW | T kit (Terminal block kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L0 | L kit (Lead wire kit) Lead wire length 0.6 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L1 | L kit (Lead wire kit) Lead wire length 1.5 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L2 | L kit (Lead wire kit) Lead wire length 3.0 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SS | S kit (Serial transmission kit) Single wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SW | S kit (Serial transmission kit) Double wiring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Applicable stations ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">01</td><td>1 station</td></tr> <tr><td style="text-align: center;">⋮</td><td>⋮</td></tr> <tr><td style="text-align: center;">24</td><td>24 stations</td></tr> </table> <p>Note 1) "F0": Nil Note 2) S kit is from 01 to 16</p> | 01 | 1 station | ⋮ | ⋮ | 24 | 24 stations | <p>Applicable stations ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">01</td><td>1 station</td></tr> <tr><td style="text-align: center;">⋮</td><td>⋮</td></tr> <tr><td style="text-align: center;">16</td><td>16 stations</td></tr> </table> <p>Note 1) "F0": Nil</p> | 01 | 1 station | ⋮ | ⋮ | 16 | 16 stations | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 01 | 1 station | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ⋮ | ⋮ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | 24 stations | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 01 | 1 station | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ⋮ | ⋮ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | 16 stations | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>COM. (L kit only) ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">Nil</td><td>Positive common</td></tr> <tr><td style="text-align: center;">N</td><td>Negative common</td></tr> </table> | Nil | Positive common | N | Negative common | <p>COM. (L kit only) ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">Nil</td><td>Positive common</td></tr> <tr><td style="text-align: center;">N</td><td>Negative common</td></tr> </table> | Nil | Positive common | N | Negative common | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nil | Positive common | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | Negative common | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nil | Positive common | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | Negative common | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Option ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">Nil</td><td>None</td></tr> <tr><td style="text-align: center;">B</td><td>Back pressure check valve</td></tr> <tr><td style="text-align: center;">R</td><td>External pilot specifications</td></tr> </table> <p>Note) Enter "BR" for both options.</p> | Nil | None | B | Back pressure check valve | R | External pilot specifications | <p>Option ●</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">Nil</td><td>None</td></tr> <tr><td style="text-align: center;">B</td><td>Back pressure check valve</td></tr> <tr><td style="text-align: center;">R</td><td>External pilot specifications</td></tr> </table> <p>Note) Enter "BR" for both options.</p> | Nil | None | B | Back pressure check valve | R | External pilot specifications | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nil | None | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | Back pressure check valve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R | External pilot specifications | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nil | None | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | Back pressure check valve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R | External pilot specifications | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

SV

SYJ

SZ

VF

VP4

VQ
1/2

VQ
4/5

VQC
1/2

VQC
4/5

VQZ

SQ

VFS

VFR

VQ7

SQ1000/2000 Series


How to Increase Manifold Stations for SQ1000/2000

3. Connection Method (Refer to page 816 regarding the steps for adding stations to a manifold block.)

Connect the round terminal of the red lead wire to the common terminal inside the junction cover.

(1) Connecting common terminals


Connect lead wire assemblies included with manifold blocks as follows.

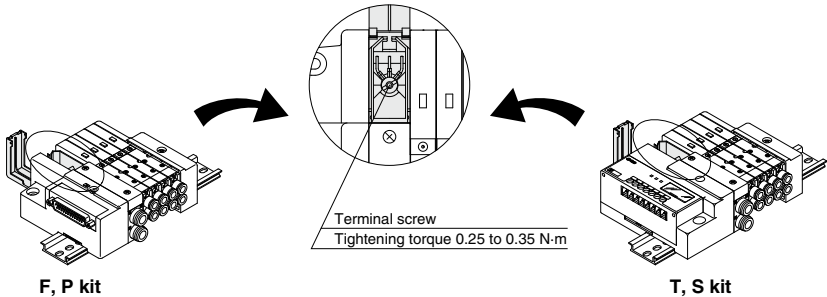

(2) Pulling out connector

Pull out the connector to connect the lead wire.

- For F and P kits, pull out and remove the housing while pressing down hard on the hook with a flat head screwdriver, etc. Remove the manual lever and lead wire cover, and pull out the connector.
- For T kits, remove the screws and pull out the terminal block.
- For S kits, remove the screws and pull out the connector.

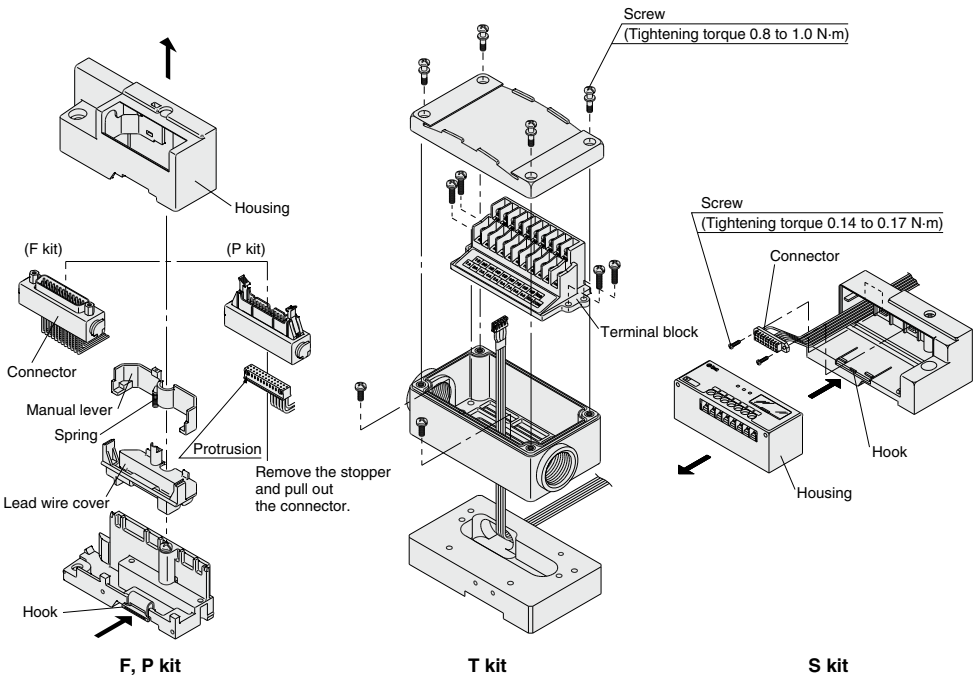


How to Increase Manifold Stations for SQ1000/2000

(3) Connect the black and white lead wire pins to the positions shown below in accordance with each kit.

- ⚠ Caution**
1. After inserting the pin, confirm that the pin hook is locked by lightly pulling the lead wire.
 2. Do not pull the lead wire forcefully when connecting. Also, take care that lead wires do not get caught between manifolds or when closing the junction cover.

Wiring (F Kit: D-sub Connector Kit)

Procedure) Based on the manifold specifications, station 1 of SOL.A (black wire) will be terminal number 1 of the D-sub connector, and for station 2 and thereafter, connect black wires, then white wires in the order as shown below by the arrows.

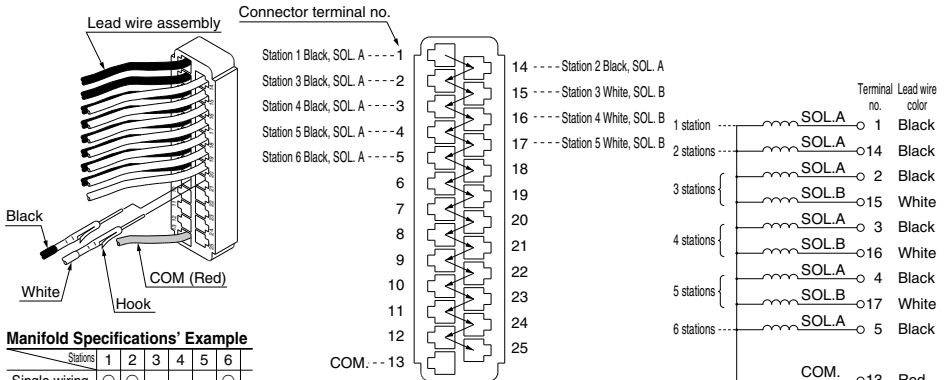


Manifold Specifications' Example

| Stations | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------|---|---|---|---|---|---|
| Single wiring | ○ | ○ | | | | |
| Double wiring | | | ○ | ○ | ○ | |

* The drawing above shows connections based on the manifold specifications' example in the table to the left.

Wiring (P Kit: Flat Ribbon Cable Kit)

Procedure) Based on the manifold specifications, station 1 of SOL.A (black wire) will be terminal number 1B of the flat ribbon cable connector, and for station 2 and thereafter, connect black wires, then white wires in the order as shown below by the arrows.

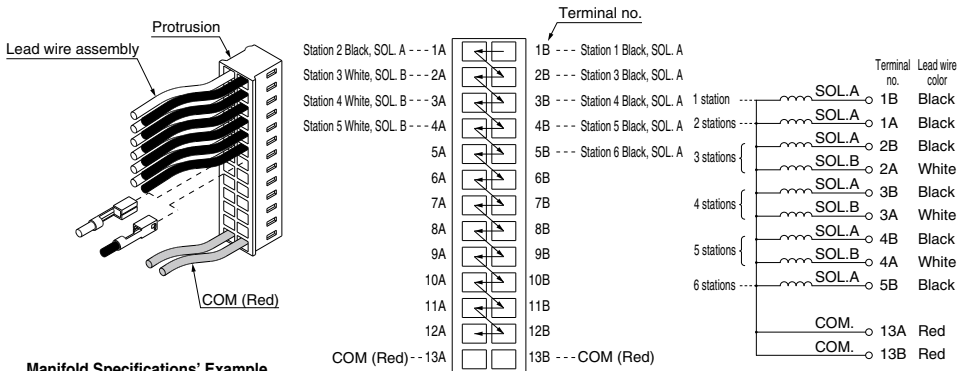

Manifold Specifications' Example

| Stations | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------|---|---|---|---|---|---|
| Single wiring | ○ | ○ | | | | ○ |
| Double wiring | | | ○ | ○ | ○ | |

* The drawing above shows connections for type 26P flat ribbon cable connector based on the manifold specifications' example in the table to the left. For type 20P, the connection will be the same as above except that COM changes to 10A and 10B.





- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- VQ 1/2**
- VQ 4/5**
- VQC 1/2**
- VQC 4/5**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

SQ1000/2000 Series

How to Increase Manifold Stations for SQ1000/2000

Wiring (T Kit: Terminal Block Kit)

Procedure) Based on the manifold specifications, connect to the housing according to the wiring example below.

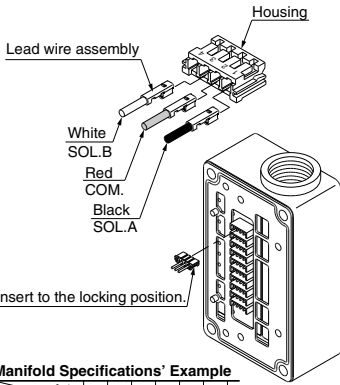

| | Lead wire color | Terminal no. |
|------------|--------------------------|--------------|
| 1 station | SOL.A _o Black | Station 1: 1 |
| | COM. _o Red | Station 1: 2 |
| 2 stations | SOL.A _o Black | Station 1: 3 |
| | COM. _o Red | Station 1: 4 |
| 3 stations | SOL.A _o Black | Station 2: 1 |
| | COM. _o Red | Station 2: 2 |
| 4 stations | SOL.A _o Black | Station 2: 3 |
| | COM. _o Red | Station 2: 4 |
| 5 stations | SOL.B _o White | Station 3: 1 |
| | SOL.A _o Black | Station 3: 3 |
| 6 stations | COM. _o Red | Station 3: 4 |
| | SOL.B _o White | Station 4: 1 |
| 6 stations | SOL.A _o Black | Station 4: 3 |
| | COM. _o Red | Station 4: 4 |


Manifold Specifications' Example

| Stations | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------|---|---|---|---|---|---|
| Single wiring | ○ | ○ | ○ | ○ | ○ | ○ |
| Double wiring | | | | | ○ | ○ |

How to Increase Manifold Stations for SQ1000/2000

Wiring (S Kit: Serial Transmission Kit)

Procedure) Based on the manifold specifications, station 1 of SOL.A (black wire) will be terminal number 1 of the serial connector, and for station 2 and thereafter, connect black wires, then white wires in the order as shown below by the arrows.

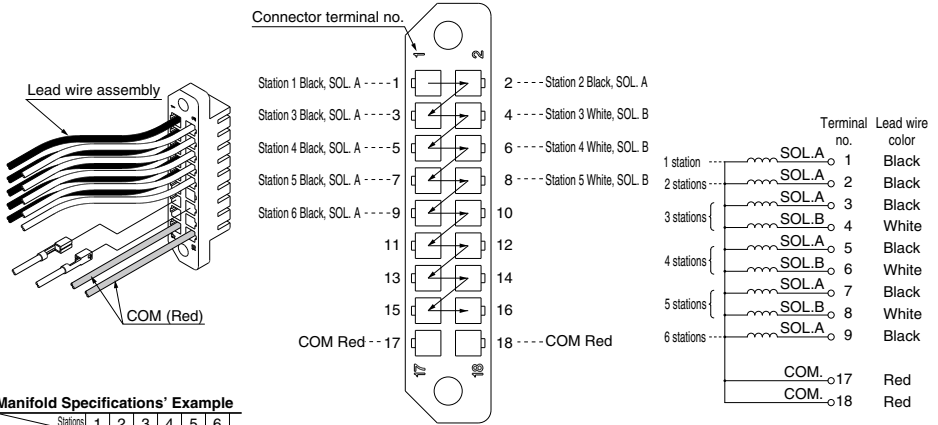

Manifold Specifications' Example

| Stations | 1 | 2 | 3 | 4 | 5 | 6 |
|---------------|---|---|---|---|---|---|
| Single wiring | ○ | ○ | | | ○ | |
| Double wiring | | | ○ | ○ | ○ | ○ |

* The drawing above shows connections based on the manifold specifications' example in the table to the left.

SV

SYJ

SZ

VP4

VQ 1/2

VQ 4/5

VQC 1/2

VQC 4/5

VQZ

SQ

VFS

VFR


VQ7

SQ1000 Series

Construction: SQ1000 Series Plug-in Type Main Parts and Pilot Valve Assembly

Metal seal type

Single: SQ1130




SQ1130



Rubber seal type


Single: SQ1131



SQ1131




Double: SQ1230D



SQ1230D




Double: SQ1231D



SQ1231D



3 position: SQ1430



SQ1330




SQ1430



SQ1530



3 position: SQ1431



SQ1331



SQ1431



SQ1531



Component Parts

| No. | Description | Material |
|-----|--|------------------------------|
| 1 | Body | Zinc die-casted |
| 2 | Spool/Sleeve | Stainless steel (Metal seal) |
| | Spool | Aluminum (Rubber seal) |
| 3 | Piston | Resin |
| 4 | Pilot valve assembly (Refer to the below.) | — |

Pilot valve assembly

V112 -

Coil voltage


| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Function


| Symbol | Specifications | DC |
|--------|------------------------------|---------------|
| Nil | Standard type | (0.4 W) ○ |
| B | Quick response type | (0.95 W) ○ |
| K | High pressure type (1.0 MPa) | (0.95 W) ○ |

Note) Common to single solenoid and double solenoid


Dual 3 port valve: SQ1B31




SQ1A31



SQ1B31





SQ1C31



Construction: SQ2000 Series Plug-in Type Main Parts and Pilot Valve Assembly



Metal seal type

Single: SQ2130





Rubber seal type



Single: SQ2131







Double: SQ2230D







Double: SQ2231D



3 position: SQ2430



3 position: SQ2431



Component Parts

| No. | Description | Material |
|-----|--|------------------------------|
| 1 | Body | Aluminum die-casted |
| 2 | Spool/Sleeve | Stainless steel (Metal seal) |
| 2 | Spool | Aluminum (Rubber seal) |
| 3 | Piston | Resin |
| 4 | Pilot valve assembly (Refer to the below.) | — |

Pilot valve assembly

V112 -

● **Coil voltage**





| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

● **Function**

| Symbol | Specifications | DC |
|--------|---------------------|----------|
| Nil | Standard type | (0.4 W) |
| B | Quick response type | (0.95 W) |

(Note) Common to single solenoid and double solenoid


Dual 3 port valve: SQ2B31



SQ1000 Series

Manifold Exploded View: SQ1000 (Plug-in Type Manifold) SS5Q13

(F, P, L, S kit)

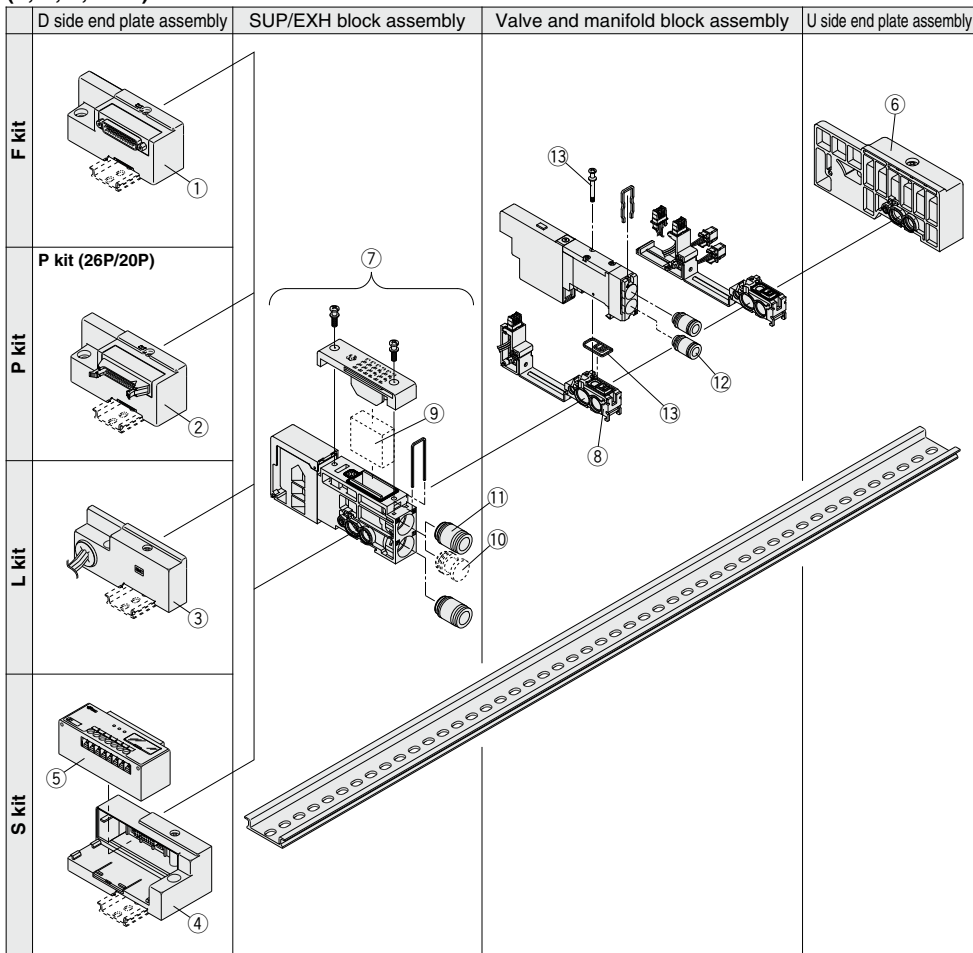

Manifold Spare Parts

Refer to pages 816 to 821 of "How to Increase Manifold Stations" regarding the mounting of each spare parts.

<① ② ③ ④ D side end plate assembly>

SSQ1000-3A-3

Manifold mounting

| | |
|------------|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

Electrical entry

| | | |
|------------|-------------|---|
| F | F kit | ① |
| P | P kit (26P) | ② |
| PC | P kit (20P) | ③ |
| Nil | L kit | ④ |
| S | S kit | ④ |

Note) L kit: Nil

Wiring specifications

| | |
|----------|-------------------|
| 0 | Without lead wire |
| S | Single wiring |
| W | Double wiring |

Stations

| | |
|-----------|-----------------|
| 01 | For 1 station |
| ⋮ | ⋮ |
| 24 | For 24 stations |

Note 1) The maximum number of stations will be different depending on the wiring specifications.

Note 2) L kit: Nil

<⑤ SI unit>

| Manifold | No. | Description |
|----------|------------|---|
| SDH kit | EX140-SUH1 | NKE Corp.: Fieldbus H System (16 output points) |
| SDQ kit | EX140-SDN1 | DeviceNet™ (16 output points) |
| SDR1 kit | EX140-SCS1 | OMRON Corp.: CompoBus/S (16 output points) |
| SDR2 kit | EX140-SCS2 | OMRON Corp.: CompoBus/S (8 output points) |
| SDV kit | EX140-SMJ1 | CC-LINK (16 output points) |

<⑥ U side end plate assembly>

(For F, P, S kit)

SSQ1000-2A-3

(For L kit)

SSQ1000-2A-3

Manifold mounting

| | |
|------------|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

<⑦ SUP/EXH block assembly>

SSQ1000-PR-3-C8

Port size

| | |
|-----------|------------------------------|
| C8 | One-touch fitting for ø8 |
| N9 | One-touch fitting for ø5/16" |

Option

| | |
|------------|-----------------------------------|
| Nil | Common exhaust type |
| R | External pilot |
| S | Built-in silencer, direct exhaust |

Note) Enter "-RS" for both options.

<⑧ Manifold block assembly>

SSQ1000-1A-3-F0 01 Including gaskets ⑬

Lead wire type

| | |
|-----------|---|
| F0 | Without lead wire |
| FS | F kit: D-sub connector kit Single wiring |
| FW | F kit: D-sub connector kit Double wiring |
| PS | P kit: Flat ribbon cable kit Single wiring |
| PW | P kit: Flat ribbon cable kit Double wiring |
| L0 | L kit: Lead wire kit Lead wire length 0.6 m |
| L1 | L kit: Lead wire kit Lead wire length 1.5 m |
| L2 | L kit: Lead wire kit Lead wire length 3 m |
| SS | S kit: Serial transmission kit Single wiring |
| SW | S kit: Serial transmission kit Double wiring |

Option

| | |
|------------|-------------------------------|
| Nil | None |
| B | Back pressure check valve |
| R | External pilot specifications |

Note) Enter "-BR" for both options.

Applicable stations

| | |
|-----------|------------|
| 01 | Station 1 |
| ⋮ | ⋮ |
| 24 | Station 24 |

Note 1) "F0": Nil

Note 2) Specify from "01" to "16" for S kit.

<⑨ Element>

SSQ1000-SE

Note) Part number for a 10 piece set of element.
For replacement procedures, refer to page 881.

<⑩ Port plug>

VVQZ2000-CP

<⑪ Fitting assembly>

(For P, R port)

VVQ1000-51A-C8

Port size

| | |
|-----------|------------------------------|
| C6 | One-touch fitting for ø6 |
| C8 | One-touch fitting for ø8 |
| N7 | One-touch fitting for ø1/4" |
| N9 | One-touch fitting for ø5/16" |

Note) Purchasing order is available in units of 10 pieces.

<⑫ Fitting assembly>

(For cylinder port)

VVQ1000-50A-C3

Port size

| | |
|-----------|------------------------------|
| C3 | One-touch fitting for ø3.2 |
| C4 | One-touch fitting for ø4 |
| C6 | One-touch fitting for ø6 |
| M5 | M5 thread |
| N1 | One-touch fitting for ø1/8" |
| N3 | One-touch fitting for ø5/32" |
| N7 | One-touch fitting for ø1/4" |

Note) Purchasing order is available in units of 10 pieces.

<⑬ Gasket and screw assembly>

SQ1000-GS


Note) Part number for 10 pieces each of gaskets and screws.

| |
|----------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series

Manifold Exploded View: SQ2000 (Plug-in Type Manifold) SS5Q23

(F, P, T, L, S kit)

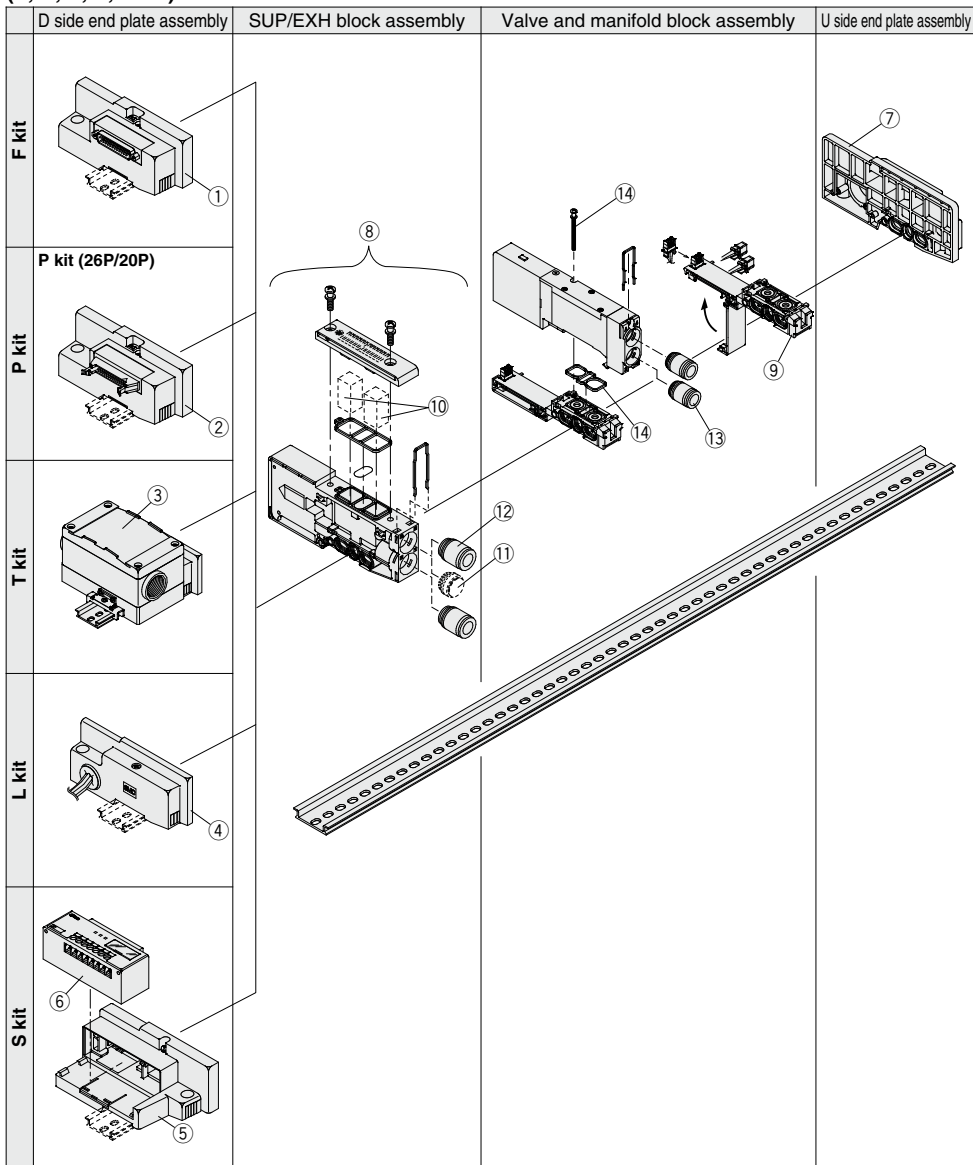

Manifold Spare Parts

Refer to pages 816 to 821 of "How to Increase Manifold Stations" regarding the mounting of each spare parts.

<① ② ③ ④ ⑤ D side end plate assembly>

SSQ2000 - 3A - 3

Manifold mounting

| | |
|-----|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

Electrical entry

| | | |
|-----|-------------|---|
| F | F kit | ① |
| P | P kit (26P) | ② |
| PC | P kit (20P) | ③ |
| T | T kit | ④ |
| Nil | L kit | ⑤ |
| S | S kit | ⑥ |

Wiring specifications

| | |
|---|-------------------|
| O | Without lead wire |
| S | Single wiring |
| W | Double wiring |

Note) L kit: Nil

Stations

| | |
|----|-----------------|
| 01 | For 1 station |
| ⋮ | ⋮ |
| 16 | For 16 stations |

Note 1) The maximum number of stations will be different depending on the wiring specifications.
Note 2) L kit: Nil

<⑥ SI unit>

| Manifold | No. | Description |
|----------|------------|---|
| SDH kit | EX140-SUH1 | NKE Corp.: Fieldbus H System (16 output points) |
| SDQ kit | EX140-SDN1 | DeviceNet™ (16 output points) |
| SDR1 kit | EX140-SCS1 | OMRON Corp.: CompoBus/S (16 output points) |
| SDR2 kit | EX140-SCS2 | OMRON Corp.: CompoBus/S (8 output points) |
| SDV kit | EX140-SMJ1 | CC-LINK (16 output points) |

<⑦ U side end plate assembly>

(For F, P, T, S kit)

SSQ2000 - 2A - 3

(For L kit)
SSQ2000 - 2A - 3

Manifold mounting

| | |
|-----|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

<⑧ SUP/EXH block assembly>

SSQ2000 - PR - 3 - C8

Port size

| | |
|-----|------------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

Option

| | |
|-----|-----------------------------------|
| Nil | Common exhaust type |
| R | External pilot |
| S | Built-in silencer, direct exhaust |

Note) Enter "RS" for both options.

<⑨ Manifold block assembly>

SSQ2000 - 1A - 3 - F0 01

Lead wire type

| | |
|----|---|
| F0 | Without lead wire |
| FS | F kit: D-sub connector kit Single wiring |
| FW | F kit: D-sub connector kit Double wiring |
| PS | P kit: Flat ribbon cable kit Single wiring |
| PW | P kit: Flat ribbon cable kit Double wiring |
| TS | T kit: Terminal block kit Single wiring |
| TW | T kit: Terminal block kit Double wiring |
| L0 | L kit: Lead wire kit Lead wire length 0.6 m |
| L1 | L kit: Lead wire kit Lead wire length 1.5 m |
| L2 | L kit: Lead wire kit Lead wire length 3 m |
| SS | S kit: Serial transmission kit Single wiring |
| SW | S kit: Serial transmission kit Double wiring |

Option

| | |
|-----|-------------------------------|
| Nil | None |
| B | Back pressure check valve |
| R | External pilot specifications |

Note) Enter "BR" for both options.

Applicable stations

| | |
|----|------------|
| 01 | Station 1 |
| ⋮ | ⋮ |
| 16 | Station 16 |

Note 1) "F0": Nil

<⑩ Element>

SSQ2000 - SE

Note) Part number for a 10 piece set of element.
For replacement procedures, refer to page 881.

<⑪ Port plug>

VVQZ3000 - CP

<⑫ Fitting assembly>

(For P, R port)

VVQ2000 - 51A - C8

Port size

| | |
|-----|------------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

Note) Purchasing order is available in units of 10 pieces.

<⑬ Fitting assembly>

(For cylinder port)

VVQ1000 - 51A - C4

Port size

| | |
|----|------------------------------|
| C4 | One-touch fitting for ø4 |
| C6 | One-touch fitting for ø6 |
| C8 | One-touch fitting for ø8 |
| N3 | One-touch fitting for ø5/32" |
| N7 | One-touch fitting for ø1/4" |
| N9 | One-touch fitting for ø5/16" |

Note) Purchasing order is available in units of 10 pieces.

<⑭ Gasket and screw assembly>

SQ2000 - GS

Note) Part number for 10 pieces each of gaskets and screws.

| |
|---------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

Plug Lead Unit

SQ1000 Series



How to Order Manifold

SS5Q14 - **08** **FD2** - **D** - -

Stations

| | |
|-----------|-------------|
| 01 | 1 station |
| ⋮ | ⋮ |
| 24 (Note) | 24 stations |

Note) The maximum number of stations depends on the type of electrical entries. Refer to "Electrical entry" for details.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

1(P), 3(R) port size

| | |
|-----|--|
| Nil | 1(P), 3(R) port, One-touch fittings for ø8 |
| 00T | 1(P), 3(R) port, One-touch fittings for ø5/16" |

Manifold mounting

| | |
|---|------------------------|
| D | DIN rail mounting type |
|---|------------------------|

Option

| | |
|--------------|--|
| Nil | None |
| 02 to 24 (1) | DIN rail length specified |
| B (2)(3) | Back pressure check valve |
| K (4) | Special wiring specifications (Except double wiring) |
| N | With name plate (Side ported only) |
| R | External pilot specifications |
| S | Built-in silencer, direct exhaust |

Note 1) Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.) The number of stations that may be displayed is longer than the manifold number of stations. Example: -D09

Note 2) When "-B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("-B" is not necessary)

Note 3) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.




Note 4) Specify "-K" for wiring specification for cases below. (Except C kit)

- All single wiring
- Single and double mixed wiring.

Specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)

Note 5) For specifying two or more options, enter them alphabetically. Example: -BKN
* Refer to pages 856 to 860 and 866 to 868 for manifold option parts.

Electrical entry

| Kit type | Lead wire connector location | Cable specifications | Station | Max. number of solenoids for special wiring specifications (2) |
|---|------------------------------|----------------------|----------------------------------|--|
| F kit  D-sub Connector kit | D side | FD0 | 1 to 12 stations (Double wiring) | 24 |
| | | FD1 | | |
| | | FD2 | | |
| | | FD3 | | |
| P kit  Flat ribbon cable connector kit (26P) (20P) | D side (1) | PD0 | 1 to 12 stations (Double wiring) | 24 |
| | | PD1 | | |
| | | PD2 | | |
| | | PD3 | | |
| | | PDC | 1 to 9 stations (Double wiring) | 18 |
| C kit  Connector kit | C | Connector kit | 1 to 24 stations | — |


Note 1) Separately order the 20P type cable assembly for the P kit.

Note 2) Specify the wiring so that the maximum number of solenoids is not exceeded. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

* Refer to page 877 for manifold spare parts.

How to Order Valves

SQ1 **1** **4** **0** **-** **5** **L** **1** **-** **C6** **-** **-** **-** **-**

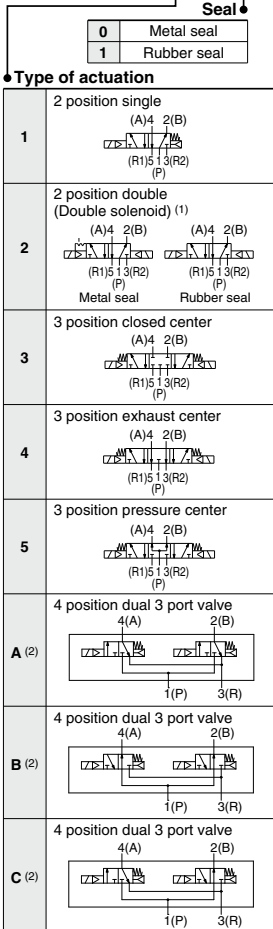

Note 1) For double solenoid specification, the function symbol below is "D".
Note 2) Only rubber seal types are applicable.

Function

| Symbol | Specifications |
|--------------|---|
| Nil | Standard type (0.4 W) |
| B (4) | Quick response type (0.95 W) |
| D (1) | 2 position double (Double solenoid specifications) |
| K (4) | High pressure type (1 MPa, 0.95 W) [Applicable to metal seal only] |
| N | Negative common |
| R (2) | External pilot specifications |

Note 1) "D" is specified for 2 position double.
Note 2) Except dual 3 port valves.
Note 3) When two or more symbols are specified, indicate them alphabetically.
Note 4) Function combination of "B" and "K" is not possible.

CE-compliant

| | |
|------------|--------------|
| Nil | — |
| Q | CE-compliant |

With/Without manifold block

| Nil | M | MB (Note) |
|--|-------------------------|---|
| Without manifold block | With manifold block | With manifold block, built-in back pressure check valve |
| • When ordering with manifolds • When only valves are required. | | For adding stations |

Note) Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.

Port plug mounting port

| | |
|------------|-----------|
| Nil | None |
| A | Port 4(A) |
| B | Port 2(B) |

Cylinder port

| Symbol | Port size | Port location |
|-----------|----------------------------|--------------------|
| C3 | One-touch fitting for ø3.2 | Side ported |
| C4 | One-touch fitting for ø4 | |
| C6 | One-touch fitting for ø6 | |
| M5 | M5 thread | Top (1) ported |
| L3 | One-touch fitting for ø3.2 | |
| L4 | One-touch fitting for ø4 | |
| L6 | One-touch fitting for ø6 | |
| L5 | M5 thread | |

Note 1) Can be changed to side ported configuration.
Note 2) Refer to page 868 for the inch-size One-touch fittings.

Manual override

| Nil | B |
|---|----------------------------------|
| Non-locking push type (Tool required) | Locking type (Tool required) |

Electrical entry

| L | LO |
|--|--|
| Plug connector type With 300 mm lead wire | Plug connector type without connector |

For F, P, J kit manifolds (Note)

Note) Indicate "LO" when ordering centralized wiring type manifolds, F, P, and J kits, since the lead wire will be attached to the manifold side.

Rated voltage

















| | |
|----------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Note) Light/surge voltage suppressor is built-in.

SV
SYJ
SZ
VF
VP4
VQ 1/2
VQ 4/5
VQC 1/2
VQC 4/5
VQZ
SQ
VFS
VFR
VQ7


SQ1000 Series

Manifold Options

| | | | |
|--|--|--|---|
| <p>Blanking plate SSQ1000-10A-4 P.856</p>  | <p>Individual SUP/EXH spacer SSQ1000-PR1-4-C₆L₆ P.857</p>  | <p>Name plate (-N) SSQ1000-N3-n P.859</p>  | <p>External pilot specifications (-R) P.860</p>  <p>External pilot port</p> |
| <p>SUP/EXH block SSQ1000-PR-4-C8 (-S) P.856</p>  | <p>SUP block plate SSQ1000-B-P P.858</p>  <p>D side U side</p> | <p>Blanking plug KQ2P-23/04/06/08 P.859</p>  | <p>Dual flow fitting SSQ1000-52A-C₈N₉ P.860</p>  |
| <p>Individual SUP spacer SSQ1000-P-4-C₆L₆ P.856</p>  | <p>EXH block plate SSQ1000-B-R P.858</p>  <p>D side U side</p> | <p>Port plug VVQZ100-CP P.859</p>  | <p>Silencer (For EXH port) P.860</p>  |
| <p>Individual EXH spacer SSQ1000-R-4-C₆L₆ P.857</p>  | <p>Back pressure check valve (-B) SSQ1000-BP P.858</p>  | <p>Built-in silencer, direct exhaust (-S) P.859</p>  | <p>Special wiring specifications (-K) P.866</p> <p>D-sub connector</p>  <p>Terminal no.</p> <ul style="list-style-type: none"> 1 station SOLA 1 (-) 2 stations SOLA 14 (-) 3 stations SOLA 2 (-) 4 stations SOLA 15 (-) 5 stations SOLA 3 (-) 6 stations SOLA 4 (-) 7 stations SOLA 17 (-) 8 stations SOLA 18 (-) SOLA 5 (-) SOLA 6 (-) SOLA 19 (-) COM. 13 (+) <p>Connector terminal no.</p> <p>Although the standard products come with double wiring, mixed single and double wiring is available upon request.</p> |

How to Order Manifold Assembly

Example: D-sub connector kit, with cable (3 m)

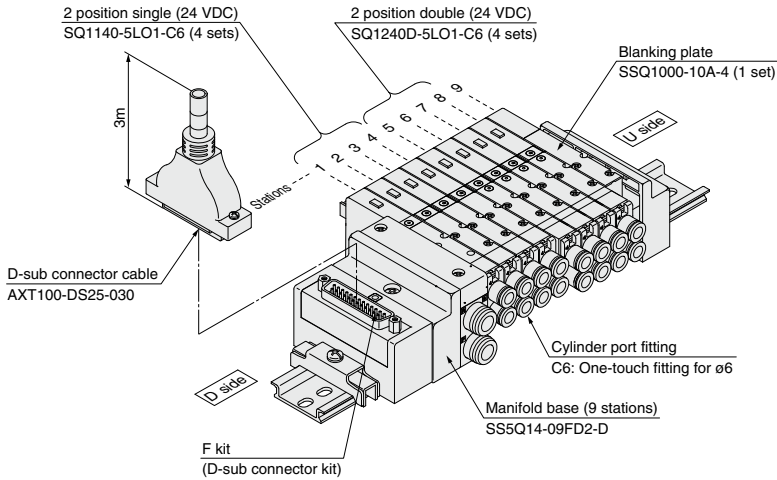

- SS5Q14-09FD2-D 1 set (F kit 9-station manifold base)
 * SQ1140-5LO1-C6 4 sets (2 position single)
 * SQ1240D-5LO1-C6 4 sets (2 position double)
 * SSQ1000-10A-4 1 set (Blanking plate)

↳ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part numbers in order starting from the first station on the D side.
 When entry of part numbers becomes complicated, indicate on the manifold specification sheet.

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Valve Specifications

Model

| Series | Type of actuation | Seal | Model | Flow rate characteristics (1) | | | | | | Response time (ms) (2) | | Weight (g) | |
|--------|-------------------|-------------------|-------------|-------------------------------|------|------|------------------------------|------|------|------------------------|-------------------------|------------|-----|
| | | | | 1→4/2 (P→A/B) | | | 4→5 (A→R1) | | | Standard (0.4 W) | Quick response (0.95 W) | | |
| | | | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | | | | |
| SQ1000 | 2 position | Single | Metal seal | SQ1140 | 0.62 | 0.10 | 0.14 | 0.63 | 0.11 | 0.14 | 26 or less | 12 or less | 80 |
| | | | Rubber seal | SQ1141 | 0.79 | 0.20 | 0.19 | 0.80 | 0.20 | 0.19 | 24 or less | 15 or less | 80 |
| | | Double | Metal seal | SQ1240D | 0.62 | 0.10 | 0.14 | 0.63 | 0.11 | 0.14 | 13 or less | 10 or less | 95 |
| | | | Rubber seal | SQ1241D | 0.79 | 0.20 | 0.19 | 0.80 | 0.20 | 0.19 | 20 or less | 15 or less | 95 |
| | 3 position | Closed center | Metal seal | SQ1340 | 0.58 | 0.12 | 0.14 | 0.63 | 0.11 | 0.14 | 44 or less | 29 or less | 100 |
| | | | Rubber seal | SQ1341 | 0.64 | 0.20 | 0.15 | 0.58 | 0.26 | 0.16 | 39 or less | 25 or less | 100 |
| | | Exhaust center | Metal seal | SQ1440 | 0.58 | 0.12 | 0.14 | 0.60 | 0.14 | 0.14 | 44 or less | 29 or less | 100 |
| | | | Rubber seal | SQ1441 | 0.64 | 0.20 | 0.15 | 0.80 | 0.20 | 0.19 | 39 or less | 25 or less | 100 |
| | | Pressure center | Metal seal | SQ1540 | 0.62 | 0.12 | 0.14 | 0.63 | 0.14 | 0.14 | 44 or less | 29 or less | 100 |
| | | | Rubber seal | SQ1541 | 0.79 | 0.21 | 0.19 | 0.59 | 0.20 | 0.14 | 39 or less | 25 or less | 100 |
| | 4 position | Dual 3 port valve | Rubber seal | SQ1641 | 0.59 | 0.28 | 0.15 | 0.59 | 0.28 | 0.15 | 27 or less | 14 or less | 95 |

Note 1) Values for the cylinder port size of C6, CYL → Values of EXH. Flow rate characteristics of 2 → 3 (B → R2) declines about 30% of 4 → 5 (A → R1).
 Note 2) Based on JIS B 8375-1981. (Values with a supply pressure of 0.5 MPa and light/surge voltage suppressor. Values fluctuate depending on the pressure and air quality.)

Specifications

| Valve specifications | Valve construction | Metal seal | Rubber seal | |
|---------------------------------|--|-----------------------|---|--|
| | Fluid | Air | | |
| Maximum operating pressure | 0.7 MPa (High pressure type (3) : 1.0 MPa) | | | |
| Min. operating pressure | Single | 0.1 MPa | 0.15 MPa | |
| | Double (Double solenoid) | 0.1 MPa | 0.1 MPa | |
| | 3 position | 0.1 MPa | 0.2 MPa | |
| | 4 position | — | 0.15 MPa | |
| Ambient and fluid temperature | -10 to 50°C (1) | | | |
| Lubrication | Not required | | | |
| Pilot valve manual override | Push type/Locking type (Tool required) | | | |
| Vibration/Impact resistance (2) | 30/150 m/s ² | | | |
| Protection structure | Dust tight | | | |
| Solenoid specifications | Coil rated voltage | 12 VDC, 24 VDC | | |
| | Allowable voltage fluctuation | ±10% of rated voltage | | |
| | Coil insulation type | Equivalent to class B | | |
| | Power consumption (Current) | 24 VDC | 0.4 W DC (17 mA), 0.95 W DC (40 mA) (4) | |
| | | 12 VDC | 0.4 W DC (34 mA), 0.95 W DC (80 mA) (4) | |

Note 1) Use dry air to prevent condensation when operating at low temperatures.

Note 2) Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and deenergized states every once for each condition.

Note 3) Metal seal type only.
 Note 4) Value for quick response, high pressure type.



Symbol

2 position single

(A)4 2(B)

(R1)5 1 3(R2)

(P)

Metal seal

2 position double (Double solenoid)

(A)4 2(B) (A)4 2(B)

(R1)5 1 3(R2) (R1)5 1 3(R2)

(P) (P)

Metal seal Rubber seal

3 position closed center

(A)4 2(B)

(R1)5 1 3(R2)

(P)

3 position exhaust center

(A)4 2(B)

(R1)5 1 3(R2)

(P)

3 position pressure center

(A)4 2(B)

(R1)5 1 3(R2)

(P)

4 position dual 3 port valve (A)

4(A) 2(B)

1(P) 3(R)

4 position dual 3 port valve (B)

4(A) 2(B)

1(P) 3(R)

4 position dual 3 port valve (C)

4(A) 2(B)

1(P) 3(R)

Manifold Specifications


| Base model | Porting specifications | | | Applicable solenoid valve | Type of connection | | Applicable stations (3) | 5-station weight (4) (g) | Addition per station (4) (g) |
|-------------|--|---------------|---|---------------------------|--------------------------|--|-------------------------|-------------------------------------|------------------------------|
| | Port size (1) | | | | | | | | |
| | 1(P), 3(R) | Port location | 4(A), 2(B) | | | | | | |
| SS5Q14-□□-□ | C8 (For ø8) (Option Built-in silencer, direct exhaust) | Side | C3 (For ø3.2) C4 (For ø4) C6 (For ø6) M5 (M5 thread) | SQ1□40 SQ1□41 | F kit: D-sub connector | | 1 to 12 stations | 420 | 20 |
| | | Top (2) | L3 (For ø3.2) L4 (For ø4) L6 (For ø6) L5 (M5 thread) | | P kit: Flat ribbon cable | | 26P 20P | 1 to 12 stations 1 to 9 stations | 420 |
| | | | | | C kit: Connector kit | | 1 to 24 stations | 460 | 35 |

Note 1) One-touch fittings in inch sizes are also available. For details, refer to page 868.


Note 2) Can be changed to side ported configuration.

Note 3) An optional specification for special wiring is available to increase the maximum number of stations. Refer to page 866 for details.


Note 4) Except valves. For valve weight, refer to page 832.

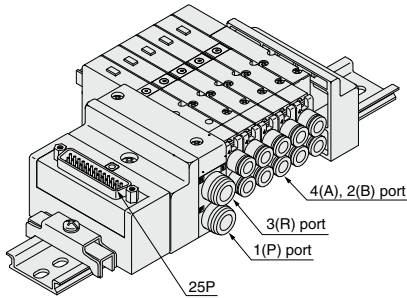

F kit

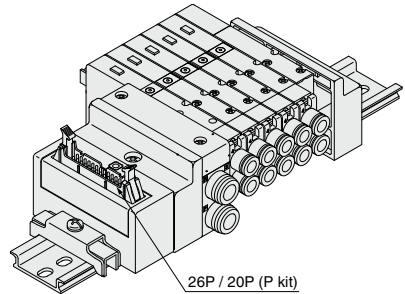

P kit




C kit

| |
|-----------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

F Kit (D-sub Connector Kit)




- The D-sub connector reduces installation labor for electrical connections.
- Using the D-sub connector (25P), conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.

Manifold Specifications

| Series | Port location | Porting specifications | | Maximum number of stations |
|--------|---------------|------------------------|----------------|--|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3, C4, C6, M5 | 12 stations (24 as a semi-standard) |


D-sub connector (25 Pins)



Cable assembly ●

015
AXT100-DS25-030
050

(The D-sub connector cable assemblies can be ordered with manifolds. Refer to "How to Order Manifold.")

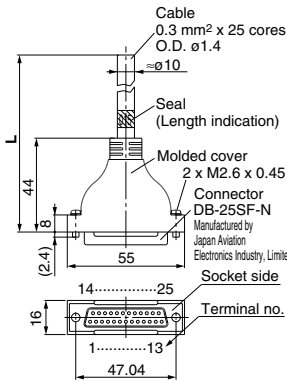

D-sub Connector Cable Assembly Terminal No.

| Terminal number | Lead wire color | Dot marking |
|-----------------|-----------------|-------------|
| 1 | Black | None |
| 2 | Brown | None |
| 3 | Red | None |
| 4 | Orange | None |
| 5 | Yellow | None |
| 6 | Pink | None |
| 7 | Blue | None |
| 8 | Purple | White |
| 9 | Gray | Black |
| 10 | White | Black |
| 11 | White | Red |
| 12 | Yellow | Red |
| 13 | Orange | Red |
| 14 | Yellow | Black |
| 15 | Pink | Black |
| 16 | Blue | White |
| 17 | Purple | None |
| 18 | Gray | None |
| 19 | Orange | Black |
| 20 | Red | White |
| 21 | Brown | White |
| 22 | Pink | Red |
| 23 | Gray | Red |
| 24 | Black | White |
| 25 | White | None |

D-sub Connector Cable Assembly

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|--------------------------------|
| 1.5 m | AXT100-DS25-015 | Cable |
| 3 m | AXT100-DS25-030 | 0.3 mm ² x 25 cores |
| 5 m | AXT100-DS25-050 | 25 cores |

* For other commercial connectors, use a 25 pins type with female connector conforming to MIL-C-24308.

* Cannot be used for movable wiring.

* Lengths other than the above are also available. Please contact SMC for details.

Electrical Characteristics

| Item | Property |
|--------------------------------------|------------|
| Conductor resistance Ω/km, 20°C | 65 or less |
| Withstand voltage VAC, 1 min. | 1000 |
| Insulation resistance MΩ/km, 20°C | 5 or more |


Note) The minimum bending inner radius of D-sub connector cable is 20 mm.

Connector manufacturers' example

- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- HIROSE ELECTRIC CO., LTD.

Electrical Wiring Specifications

D-sub connector




Connector terminal no.

D-sub connector assembly wire colors (AXT100-DS25-015/030/050)

| | Terminal no. | Polarity | Lead wire color | Dot marking |
|-------------|--------------|----------|-----------------|-------------|
| 1 station | SOL_a 1 | (-) | (+) Black | None |
| | SOL_b 14 | (-) | (+) Yellow | Black |
| 2 stations | SOL_a 2 | (-) | (+) Brown | None |
| | SOL_b 15 | (-) | (+) Pink | Black |
| 3 stations | SOL_a 3 | (-) | (+) Red | None |
| | SOL_b 16 | (-) | (+) Blue | White |
| 4 stations | SOL_a 4 | (-) | (+) Orange | None |
| | SOL_b 17 | (-) | (+) Purple | None |
| 5 stations | SOL_a 5 | (-) | (+) Yellow | None |
| | SOL_b 18 | (-) | (+) Gray | None |
| 6 stations | SOL_a 6 | (-) | (+) Pink | None |
| | SOL_b 19 | (-) | (+) Orange | Black |
| 7 stations | SOL_a 7 | (-) | (+) Blue | None |
| | SOL_b 20 | (-) | (+) Red | White |
| 8 stations | SOL_a 8 | (-) | (+) Purple | White |
| | SOL_b 21 | (-) | (+) Brown | White |
| 9 stations | SOL_a 9 | (-) | (+) Gray | Black |
| | SOL_b 22 | (-) | (+) Pink | Red |
| 10 stations | SOL_a 10 | (-) | (+) White | Black |
| | SOL_b 23 | (-) | (+) Gray | Red |
| 11 stations | SOL_a 11 | (-) | (+) White | Red |
| | SOL_b 24 | (-) | (+) Black | White |
| 12 stations | SOL_a 12 | (-) | (+) Yellow | Red |
| | SOL_b 25 | (-) | (+) White | None |
| | COM. 13 | (+) | (-) Orange | Red |


Positive common Negative common specifications specifications

Note) When using the negative common specifications, use valves for negative common.

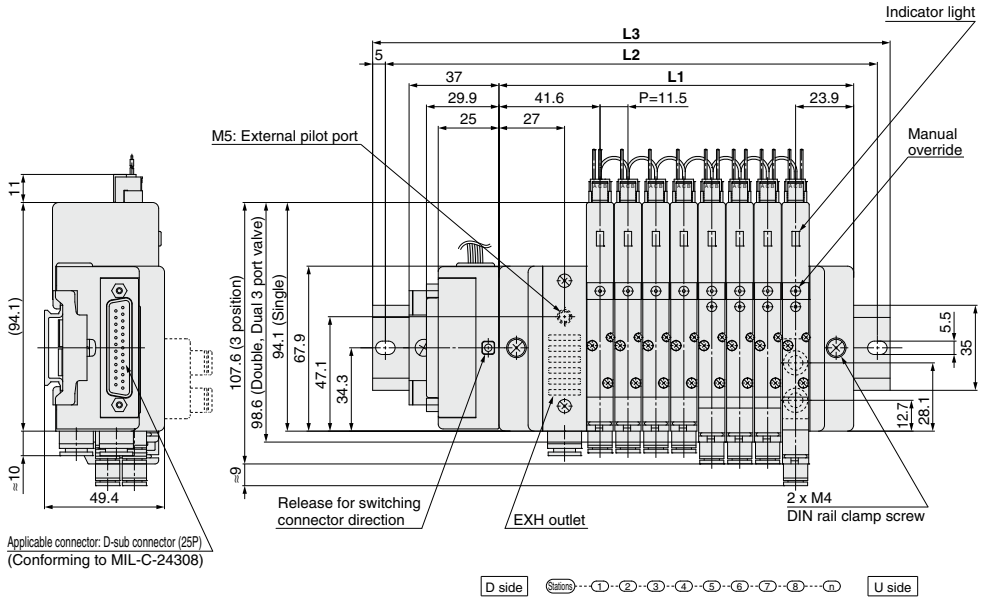

Applicable connector: D-sub connector (25P)
(Conforming to MIL-C-24308)

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7

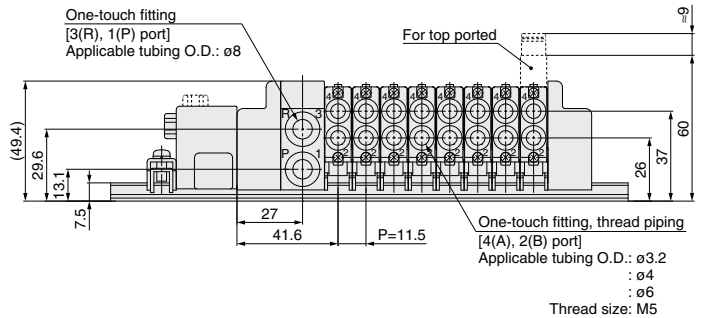


Dimensions

Formula: $L1 = 11.5n + 54$ n: Stations (Maximum 24 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 65.5 | 77 | 88.5 | 100 | 111.5 | 123 | 134.5 | 146 | 157.5 | 169 | 180.5 | 192 | 203.5 | 215 | 226.5 | 238 | 249.5 | 261 | 272.5 | 284 | 295.5 | 307 | 318.5 | 330 |
| L2 | | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 312.5 | 325 | 337.5 | 350 | 362.5 | 375 | 375 | 375 | 387.5 |
| L3 | | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 | 385.5 | 385.5 | 398 |

SQ1000 Series

P Kit (Flat Ribbon Cable Connector)




- Simplification and labor savings for wiring work can be achieved by using a MIL type for the electrical connection.
- Using the connector for flat ribbon cable (26P, 20P) conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.

Manifold Specifications

| Series | Porting specifications Port location | Port size | | Maximum number of stations (24 as a semi-standard) |
|--------|---|------------|----------------|---|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3, C4, C6, M5 | 12 stations (24 as a semi-standard) |


Flat Ribbon Cable (26 Pins, 20 Pins)

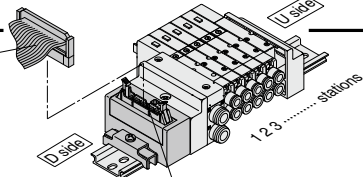

Cable assembly ●

AXT100-FC $\begin{matrix} 20 \\ 26 \\ 2 \\ 3 \end{matrix}$

(Type 26P flat ribbon cable connector assemblies can be ordered with manifolds. Refer to "How to Order manifold".)

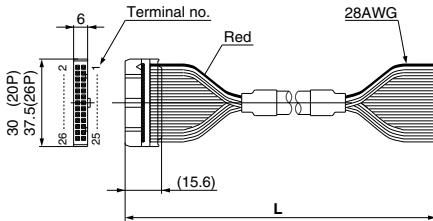

Flat Ribbon Cable Connector Assembly

| Cable length (L) | Assembly part no. | |
|------------------|-------------------|---------------|
| | 26P | 20P |
| 1.5 m | AXT100-FC26-1 | AXT100-FC20-1 |
| 3 m | AXT100-FC26-2 | AXT100-FC20-2 |
| 5 m | AXT100-FC26-3 | AXT100-FC20-3 |


- * For other commercial connectors, use a 26 pins or 20 pins with strain relief conforming to MIL-C-83503.
- * Cannot be used for movable wiring.
- * Lengths other than the above are also available. Please contact SMC for details.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.

Electrical Wiring Specifications


Flat ribbon cable connector




Double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station, regardless of valve and option types. Mixed single and double wiring is available as an option.
For details, refer to page 866.

Connector terminal no.


Triangle mark indicator position

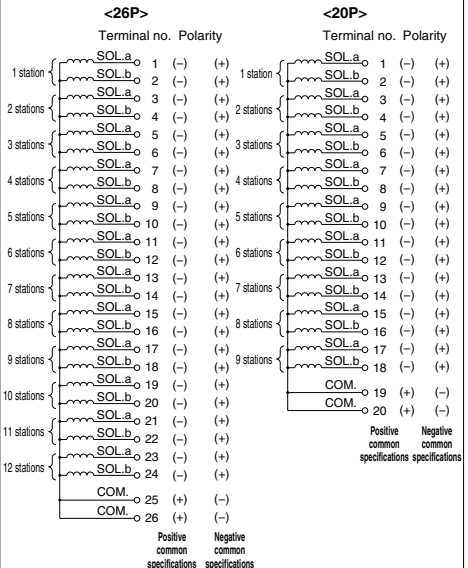

Note) When using the negative common specifications, use valves for negative common.

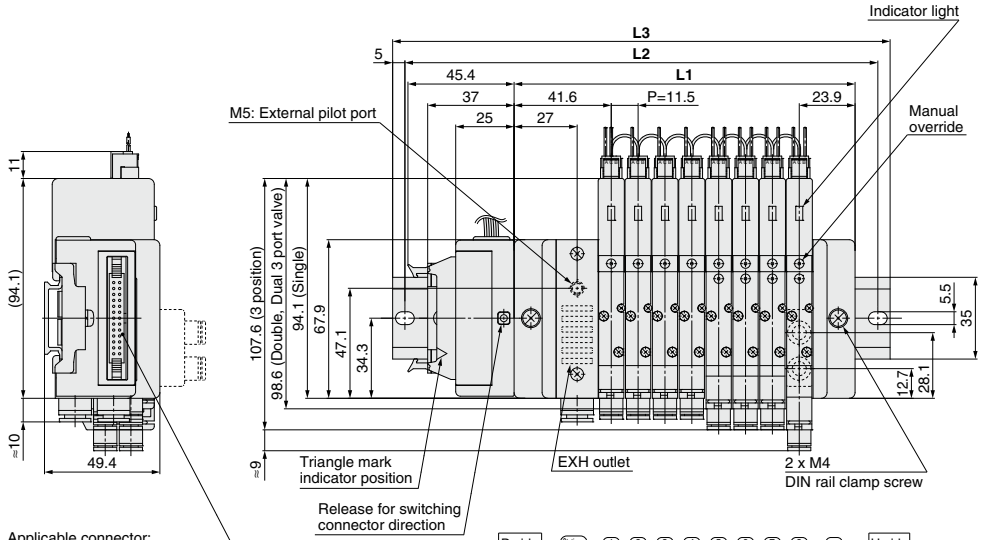

Applicable connector:
Flat ribbon cable connector (26P)
(Conforming to MIL-C-83503)

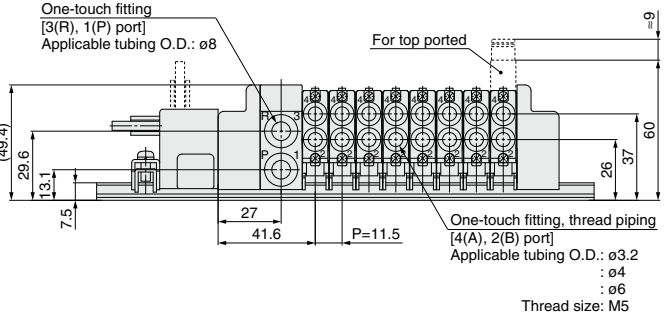

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7

Dimensions


Formula: $L1 = 11.5n + 54$ n: Stations (Maximum 24 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 65.5 | 77 | 88.5 | 100 | 111.5 | 123 | 134.5 | 146 | 157.5 | 169 | 180.5 | 192 | 203.5 | 215 | 226.5 | 238 | 249.5 | 261 | 272.5 | 284 | 295.5 | 307 | 318.5 | 330 |
| L2 | | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 312.5 | 325 | 337.5 | 350 | 362.5 | 375 | 375 | 375 | 387.5 |
| L3 | | 135.5 | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 | 385.5 | 398 |

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series


C Kit (Connector)



- Standard with lead wires connected to each valve individually.

Manifold Specifications

| Series | Port location | Porting specifications | | Maximum number of stations |
|--------|---------------|------------------------|----------------|----------------------------|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ1000 | Side, Top | C8 | C3, C4, C6, M5 | 24 stations |




* Valves are numbered from the D side.


● Wiring Specifications: Positive Common Specifications

Since lead wires are connected to the valves as shown below, connect each wire to the power supply.


Single solenoid




Lead wire color
Black
Red



Double solenoid



Lead wire color
Black
Red
White



● Plug connector lead wire length

The lead wire length of the valves with lead wire is 300 mm. When ordering a lead wire length of 600 mm or longer, list the part numbers for the valve without connector and the connector assembly.
Example) For lead wire length of 1000 mm: SQ1140-5LO1-C6...3 pcs.
AXT661-14AL-10...3 pcs.


Connector Assembly Part No.

| Lead wire length | Single solenoid | Double solenoid |
|----------------------|-----------------|-----------------|
| Socket only (3 pcs.) | AXT661-12AL | |
| 300 mm | AXT661-14AL | AXT661-13AL |
| 600 mm | AXT661-14AL-6 | AXT661-13AL-6 |
| 1000 mm | AXT661-14AL-10 | AXT661-13AL-10 |
| 2000 mm | AXT661-14AL-20 | AXT661-13AL-20 |
| 3000 mm | AXT661-14AL-30 | AXT661-13AL-30 |


● Wiring Specifications: Negative Common Specifications (Semi-standard)

Since lead wires are connected to the valves as shown below, connect each wire to the power supply.


Single solenoid




Lead wire color
Red
Black



Double solenoid



Lead wire color
Red
Black
White





● Plug connector lead wire length

The lead wire length of the valves with lead wire is 300 mm. When ordering a lead wire length of 600 mm or longer, list the part numbers for the valve without connector and the connector assembly.
Example) For lead wire length of 1000 mm: SQ1140-5LO1-C6...3 pcs.
AXT661-14ANL-10...3 pcs.

Connector Assembly Part No.

| Lead wire length | Single solenoid | Double solenoid |
|----------------------|-----------------|-----------------|
| Socket only (3 pcs.) | AXT661-12AL | |
| 300 mm | AXT661-14ANL | AXT661-13ANL |
| 600 mm | AXT661-14ANL-6 | AXT661-13ANL-6 |
| 1000 mm | AXT661-14ANL-10 | AXT661-13ANL-10 |
| 2000 mm | AXT661-14ANL-20 | AXT661-13ANL-20 |
| 3000 mm | AXT661-14ANL-30 | AXT661-13ANL-30 |

Note) When using the negative common specifications, use valves for negative common.

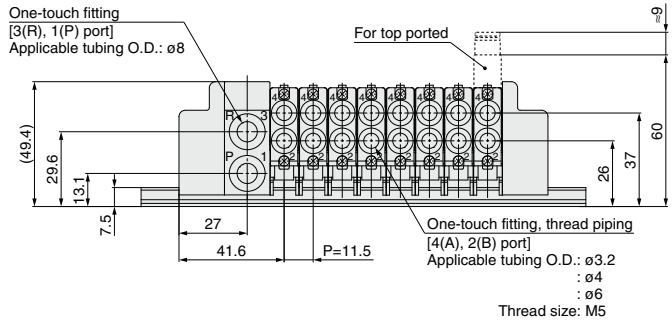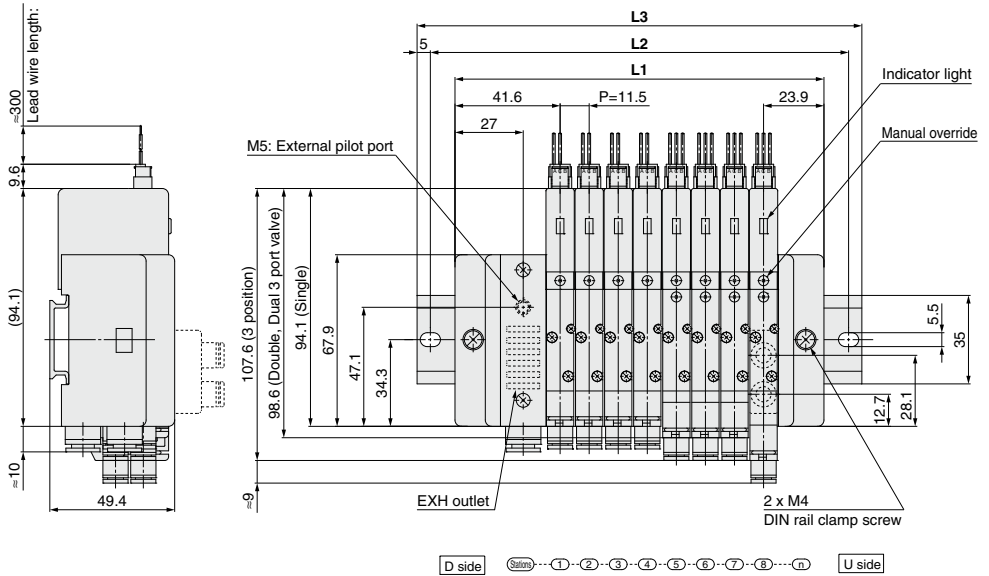

Dimensions

Formula: $L1 = 11.5n + 54$ n: Stations (Maximum 24 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|----|---|------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-------|
| L1 | | 65.5 | 77 | 88.5 | 100 | 111.5 | 123 | 134.5 | 146 | 157.5 | 169 | 180.5 | 192 | 203.5 | 215 | 226.5 | 238 | 249.5 | 261 | 272.5 | 284 | 295.5 | 307 | 318.5 | 330 |
| L2 | | 87.5 | 100 | 112.5 | 125 | 137.5 | 150 | 162.5 | 175 | 187.5 | 200 | 212.5 | 225 | 237.5 | 250 | 262.5 | 275 | 287.5 | 300 | 312.5 | 325 | 337.5 | 350 | 350 | 350 |
| L3 | | 98 | 110.5 | 123 | 135.5 | 148 | 160.5 | 173 | 185.5 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 | 360.5 |

Plug Lead Unit

SQ2000 Series



How to Order Manifold

SS5Q24-08 FD2-D

Stations

| | |
|----|-------------|
| 01 | 1 station |
| ⋮ | ⋮ |
| 16 | 16 stations |

Refer to "Electrical entry" for details.

CE-compliant

| | |
|-----|--------------|
| Nil | — |
| Q | CE-compliant |

1(P), 3(R) port size

| | |
|-----|---|
| Nil | 1(P), 3(R) port, One-touch fittings for ø10 |
| 00T | 1(P), 3(R) port, One-touch fittings for ø3/8" |

Manifold mounting

| | |
|----------|------------------------|
| D | DIN rail mounting type |
| E (Note) | Direct mounting type |

Note) Type E is only available with a C kit.
Refer to page 867 for details.

Option

| | |
|--------------|--|
| Nil | None |
| 02 to 16 (1) | DIN rail length specified |
| B | Back pressure check valve |
| K (3) | Special wiring specifications (Except double wiring) |
| N | With name plate (Side ported only) |
| R | External pilot specifications |
| S | Built-in silencer, direct exhaust |

Note 1) Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.)
The number of stations that may be displayed is longer than the manifold number of stations. Example: -D09

Note 2) When "-B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("-B" is not necessary)

Note 3) Specify "-K" for wiring specification for cases below. (Except C kit)




- All single wiring
- Single and double mixed wiring.

Specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)

Note 4) For specifying two or more options, enter them alphabetically. Example: -BKN

* Refer to pages 861 to 868 for manifold option parts.

Electrical entry

| Kit type | Lead wire connector location | Cable specifications | Stations | Max. number of solenoids for special wiring specifications (2) | Max. number of solenoids for special wiring specifications (2) |
|--|------------------------------|----------------------|-------------------------------------|--|--|
| F kit  D-sub Connector kit | D side | FD0 | 1 to 12 stations (Double wiring) | 16 stations | 24 |
| | | FD1 | | | |
| | | FD2 | | | |
| | | FD3 | | | |
| P kit  Flat ribbon cable connector kit (26P/20P) | D side (1) | PD0 | 1 to 12 stations (Double wiring) | 16 stations | 24 |
| | | PD1 | | | |
| | | PD2 | | | |
| | | PD3 | | | |
| | | PDC | | | |
| C kit  Connector kit | C | Connector kit | 1 to 16 stations | — | — |

Note 1) Separately order the 20P type cable assembly for the P kit.

Note 2) Specify the number of the solenoid so that the maximum station number is not exceeded. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

* Refer to page 877 for manifold spare parts.



How to Order Valves

SQ2 1 4 0 [] - **5 L** [] - **1 - C6** - [] - [] - []

Seal

| | |
|----------|-------------|
| 0 | Metal seal |
| 1 | Rubber seal |

Type of actuation

| | |
|--------------|---|
| 1 | 2 position single (A)4 2(B) (R1)5 1 3(R2) (P) |
| 2 | 2 position double (Double solenoid) (1) (A)4 2(B) (A)4 2(B) (R1)5 1 3(R2) (R1)5 1 3(R2) (P) (P) Metal seal Rubber seal |
| 3 | 3 position closed center (A)4 2(B) (R1)5 1 3(R2) (P) |
| 4 | 3 position exhaust center (A)4 2(B) (R1)5 1 3(R2) (P) |
| 5 | 3 position pressure center (A)4 2(B) (R1)5 1 3(R2) (P) |
| A (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| B (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |
| C (2) | 4 position dual 3 port valve 4(A) 2(B) 5(R1) 1(P) 3(R2) |

Note 1) For double solenoid specifications, the function symbol below is "D".
Note 2) Only rubber seal types are applicable.

Function

| Symbol | Specifications |
|--------------|--|
| Nil | Standard type (0.4 W) |
| B | Quick response type (0.95 W) |
| D (1) | 2 position double (Double solenoid specifications) |
| N | Negative common |
| R (2) | External pilot specifications |

Note 1) "D" is specified for 2 position double.
Note 2) Except dual 3 port valves.
Note 3) When two or more symbols are specified, indicate them alphabetically.

CE-compliant

| | |
|------------|--------------|
| Nil | — |
| Q | CE-compliant |

With/Without manifold block

| Nil | M | MB |
|--|---------------------|---|
| Without manifold block | With manifold block | With manifold block, built-in back pressure check valve |
| | | |
| <ul style="list-style-type: none"> When ordering with manifolds When only valves are required. | For adding stations | |

Port plug mounting port

| | |
|------------|-----------|
| Nil | None |
| A | Port 4(A) |
| B | Port 2(B) |

Cylinder port

| Symbol | Port size | Port location | |
|-----------|--------------------------|---------------|--|
| C4 | One-touch fitting for ø4 | Side ported | |
| C6 | One-touch fitting for ø6 | | |
| C8 | One-touch fitting for ø8 | Top ported(1) | |
| L4 | One-touch fitting for ø4 | | |
| L6 | One-touch fitting for ø6 | | |
| L8 | One-touch fitting for ø8 | | |

Note 1) Can be changed to side ported configuration.
Note 2) Refer to page 868 for the inch-size One-touch fittings.

Manual override

| Nil | B | D |
|--|---------------------------------|---|
| Non-locking push type (Tool required) | Locking type (Tool required) | Slide locking type (Manual type) * Only side ported type applicable |
| | | |

Electrical entry

| L | LO |
|--|--|
| Plug connector type With 300 mm lead wire | Plug connector type without connector |
| | |
| | For F, P, J kit manifolds (Note) |

Note) Indicate "LO" when ordering centralized wiring type manifolds, F, P, and J kits, since the lead wire will be attached to the manifold side.

Rated voltage

















| | |
|----------|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

Note) Light/surge voltage suppressor is built-in.

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7


SQ2000 Series

Manifold Options

| | | | |
|---|---|--|---|
| <p>Blanking plate SSQ2000-10A-4 P.861</p>  | <p>Individual SUP/EXH spacer SSQ2000-PR1-4-C⁸_{L⁸} P.862</p>  | <p>Name plate (-N) SSQ2000-N3-n P.864</p>  | <p>External pilot specifications (-R) P.865</p> <p>External pilot port</p>  |
| <p>SUP/EXH block SSQ2000-PR-3-C10(-S) P.861</p>  | <p>SUP block plate SSQ1000-B-R P.863</p>  | <p>Blanking plug KQ2P-04/06/08/10 P.864</p>  | <p>Dual flow fitting SSQ2000-52A-C¹⁰_{N11} P.865</p>  |
| <p>Individual SUP spacer SSQ2000-P-4-C⁸_{L⁸} P.861</p>  | <p>EXH block plate SSQ2000-B-R P.863</p>  | <p>Port plug VVQZ2000-CP P.864</p>  | <p>Silencer (For EXH port) P.865</p>  |
| <p>Individual EXH spacer SSQ2000-R-4-L⁸_{C⁸} P.862</p>  | <p>Back pressure check valve (-B) SSQ2000-BP P.863</p>  | <p>Built-in silencer, direct exhaust (-S) P.864</p>  | <p>Special wiring specifications (-K) P.866</p> <p>D-sub connector</p>  <p>Terminal no.</p> <p>Connector terminal no.</p> <p>Although the standard products come with double wiring, mixed single and double wiring is available upon request.</p> |

How to Order Manifold Assembly

Example: D-sub connector kit, with cable (3 m)

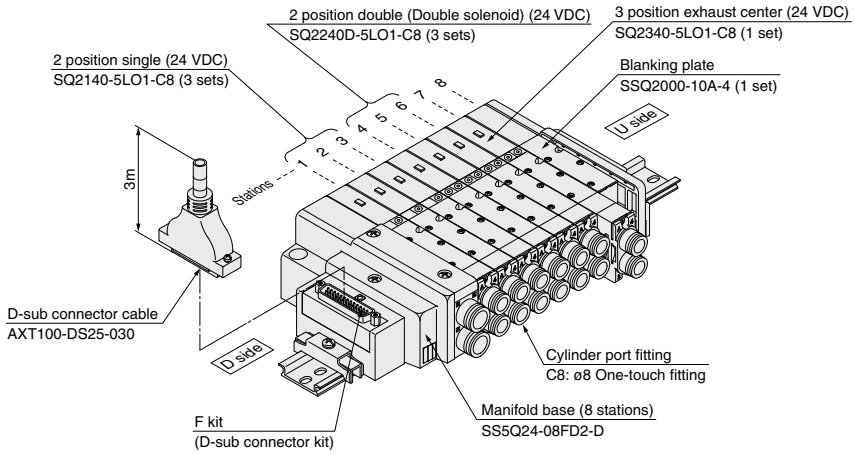

- SS5Q24-08FD2-D 1 set (F kit 8-station manifold base)**
- * SQ2140-5LO1-C8 3 sets (2 position single)
 - * SQ2240D-5LO1-C8 ... 3 sets (2 position double)
 - * SQ2340-5LO1-C8 1 set (3 position exhaust center)
 - * SSQ2000-10A-4 1 set (Blanking plate)

↳ The asterisk denotes the symbol for assembly. Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part numbers in order starting from the first station on the D side.
When entry of part numbers becomes complicated, indicate on the manifold specification sheet.

| |
|-------------------|
| SQ |
| SQJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series

Valve Specifications

Model

| Series | Type of actuation | Seal | Model | Flow rate characteristics (1) | | | | | | Response time (ms) (2) | | Weight (g) | |
|--------|-------------------|-------------------|-------------|-------------------------------|-----|------|------------------------------|-----|------|------------------------|-------------------------|------------|-----|
| | | | | 1→4/2 (P→A/B) | | | 4/2→5/3 (A/B→R1/R2) | | | Standard (0.4 W) | Quick response (0.95 W) | | |
| | | | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | | | | |
| SQ2000 | 2 position | Single | Metal seal | SQ2140 | 2.2 | 0.17 | 0.51 | 2.4 | 0.14 | 0.57 | 35 or less | 20 or less | 145 |
| | | | Rubber seal | SQ2141 | 2.3 | 0.17 | 0.51 | 3.1 | 0.18 | 0.71 | 31 or less | 24 or less | 140 |
| | | Double | Metal seal | SQ2240D | 2.2 | 0.17 | 0.51 | 2.4 | 0.14 | 0.57 | 20 or less | 15 or less | 160 |
| | | | Rubber seal | SQ2241D | 2.3 | 0.17 | 0.51 | 3.1 | 0.18 | 0.71 | 26 or less | 20 or less | 155 |
| | 3 position | Closed center | Metal seal | SQ2340 | 1.9 | 0.17 | 0.46 | 2.1 | 0.15 | 0.47 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2341 | 1.9 | 0.17 | 0.46 | 1.8 | 0.29 | 0.45 | 44 or less | 34 or less | 175 |
| | | Exhaust center | Metal seal | SQ2440 | 1.9 | 0.17 | 0.46 | 2.4 | 0.14 | 0.55 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2441 | 1.9 | 0.17 | 0.46 | 3.1 | 0.14 | 0.58 | 44 or less | 34 or less | 175 |
| | | Pressure center | Metal seal | SQ2540 | 2.3 | 0.17 | 0.51 | 2.1 | 0.18 | 0.47 | 56 or less | 37 or less | 180 |
| | | | Rubber seal | SQ2541 | 2.5 | 0.17 | 0.56 | 1.8 | 0.30 | 0.47 | 44 or less | 34 or less | 175 |
| | 4 position | Dual 3 port valve | Rubber seal | SQ2641 | 1.5 | 0.17 | 0.40 | 1.5 | 0.17 | 0.40 | 34 or less | 19 or less | 155 |

Note 1) Values for the top ported cylinder port size of C8, CYL → Values of EXH. The side ported type will be about 10% less.

Note 2) Based on JIS B 8375-1981. (Values with a supply pressure of 0.5 MPa and light/surge voltage suppressor. Values fluctuate depending on the pressure and air quality.)

Specifications

| Valve specifications | Valve construction | Metal seal | Rubber seal | |
|---------------------------------|-------------------------------|--|---|----------|
| | Fluid | Air | | |
| | Maximum operating pressure | 0.7 MPa | | |
| | Min. operating pressure | Single | 0.1 MPa | 0.15 MPa |
| | | Double (Double solenoid) | 0.1 MPa | 0.1 MPa |
| | | 3 position | 0.1 MPa | 0.2 MPa |
| | | 4 position | — | 0.15 MPa |
| | Ambient and fluid temperature | -10 to 50°C (1) | | |
| | Lubrication | Not required | | |
| | Pilot valve manual override | Push type (Tool required)/Locking type (Tool required) Slide locking type (Manual type) | | |
| Vibration/impact resistance (2) | 30/150 m/s ² | | | |
| Protection structure | Dust tight | | | |
| Solenoid specifications | Coil rated voltage | 12 VDC, 24 VDC | | |
| | Allowable voltage fluctuation | ±10% of rated voltage | | |
| | Coil insulation type | Equivalent to class B | | |
| | Power consumption (Current) | 24 VDC | 0.4 W DC (17 mA), 0.95 W DC (40 mA) (3) | |
| 12 VDC | | 0.4 W DC (34 mA), 0.95 W DC (80 mA) (3) | | |

Note 1) Use dry air to prevent condensation when operating at low temperatures.

Note 2) Vibration resistance: No malfunction occurred in a one-sweep test between 45 and 2000 Hz. Test was performed at both energized and de-energized states in the axial direction and at the right angles to the main valve and armature. (Values at the initial period)

Impact resistance: No malfunction occurred when it is tested with a drop tester in the axial direction and at the right angles to the main valve and armature in both energized and deenergized states every once for each condition.


Note 3) Value for quick response type.



Symbol


2 position single

(A)4 2(B)



2 position double (Double solenoid)


(A)4 2(B) (A)4 2(B)



Metal seal Rubber seal


3 position closed center

(A)4 2(B)




3 position pressure center

(A)4 2(B)




4 position dual 3 port valve (B)

4(A) 2(B)




3 position exhaust center

(A)4 2(B)




4 position dual 3 port valve (A)

4(A) 2(B)



4 position dual 3 port valve (C)

4(A) 2(B)



Manifold Specifications


| Base model | Porting specifications | | | Applicable solenoid valve | Type of connection | | Applicable stations (3) | 5-station weight (4) (g) | Addition per station (4) (g) |
|-------------|---|---------------|---|---------------------------|--------------------------|-----|---|--------------------------|------------------------------|
| | Port size (1) | | | | | | | | |
| | 1(P), 3(R) | Port location | 4(A), 2(B) Port size | | | | | | |
| SS5Q24-□□-□ | C10 (For ø10) Option Built-in silencer, (direct exhaust) | Side | C4 (For ø4) C6 (For ø6) C8 (For ø8) | SQ2□40 SQ2□41 | F kit: D-sub connector | | 1 to 12 stations | 580 | 35 |
| | | Top (2) | L4 (For ø4) L6 (For ø6) L8 (For ø8) | | P kit: Flat ribbon cable | | 26P 1 to 12 stations 20P 1 to 9 stations | 580 | 35 |
| | C kit: Connector kit | | | | 1 to 16 stations | 620 | 50 | | |

Note 1) One-touch fittings in inch sizes are also available. For details, refer to page 868.


Note 2) Can be changed to side ported configuration.

Note 3) An optional specification for special wiring is available to increase the maximum number of stations. Refer to page 866 for details.


Note 4) Except valves. For valve weight, refer to page 846.

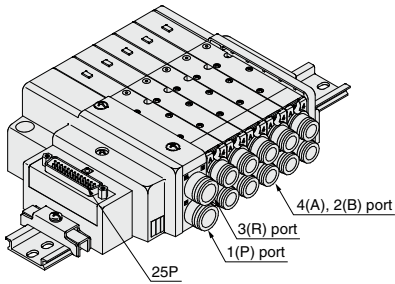

F kit

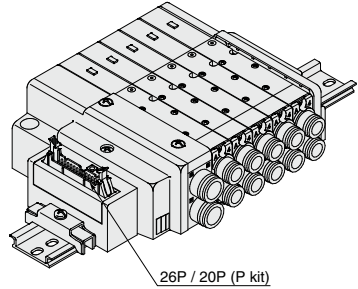

P kit




C kit

- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- VQ 1/2**
- VQ 4/5**
- VQC 1/2**
- VQC 4/5**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

SQ2000 Series

F Kit (D-sub Connector Kit)


- The D-sub connector reduces installation labor for electrical connections.
- Using the D-sub connector (25P), conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.



Manifold specifications

| Series | Port location | Porting specifications | | Maximum number of stations |
|--------|---------------|------------------------|------------|--|
| | | 1(P), 3(R) | 4(A), 2(B) | |
| SQ2000 | Side, Top | C10 | C4, C6, C8 | 12 stations (16 as a semi-standard) |


D-sub Connector (25 Pins)

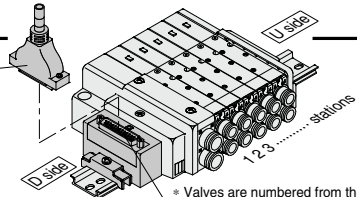

Cable assembly ●

015
AXT100-DS25-030
050

(The D-sub connector cable assemblies can be ordered with manifolds. Refer to "How to Order Manifold.")

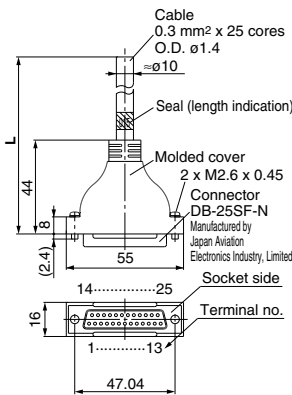

D-sub Connector Cable Assembly Terminal No.

| Terminal number | Lead wire color | Dot marking |
|-----------------|-----------------|-------------|
| 1 | Black | None |
| 2 | Brown | None |
| 3 | Red | None |
| 4 | Orange | None |
| 5 | Yellow | None |
| 6 | Pink | None |
| 7 | Blue | None |
| 8 | Purple | White |
| 9 | Gray | Black |
| 10 | White | Black |
| 11 | White | Red |
| 12 | Yellow | Red |
| 13 | Orange | Red |
| 14 | Yellow | Black |
| 15 | Pink | Black |
| 16 | Blue | White |
| 17 | Purple | None |
| 18 | Gray | None |
| 19 | Orange | Black |
| 20 | Red | White |
| 21 | Brown | White |
| 22 | Pink | Red |
| 23 | Gray | Red |
| 24 | Black | White |
| 25 | White | None |

D-sub Connector Cable Assembly

| Cable length (L) | Assembly part no. | Note |
|------------------|-------------------|--------------------|
| 1.5 m | AXT100-DS25-015 | Cable |
| 3 m | AXT100-DS25-030 | 0.3 mm² x 25 cores |
| 5 m | AXT100-DS25-050 | 25 cores |

* For other commercial connectors, use a 25 pins type with female connector conforming to MIL-C-24308.

* Cannot be used for movable wiring.

* Lengths other than the above are also available. Please contact SMC for details.

Electrical Characteristics

| Item | Property |
|--------------------------------------|------------|
| Conductor resistance Ω/km, 20°C | 65 or less |
| Withstand voltage VAC, 1 min. | 1000 |
| Insulation resistance MΩ/km, 20°C | 5 or more |


Note) The minimum bending inner radius of D-sub connector cable is 20 mm.

Connector manufacturers' example

- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- HIROSE ELECTRIC CO., LTD.

Electrical Wiring Specifications

D-sub connector



Connector terminal no.


As the standard electrical wiring specifications, double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station for 12 stations or less, regardless of valve and option types. Mixed single and double wiring is available as an option. For details, refer to page 866.

D-sub connector assembly wire colors (AXT100-DS25-015 050)

| Terminal no. | Polarity | Lead wire color | Dot marking |
|--------------|--------------|-----------------|-------------|
| 1 station | SOL.a 1 (-) | (+) Black | None |
| | SOL.b 14 (-) | (+) Yellow | Black |
| 2 stations | SOL.a 2 (-) | (+) Brown | None |
| | SOL.b 15 (-) | (+) Pink | Black |
| 3 stations | SOL.a 3 (-) | (+) Red | None |
| | SOL.b 16 (-) | (+) Blue | White |
| 4 stations | SOL.a 4 (-) | (+) Orange | None |
| | SOL.b 17 (-) | (+) Purple | None |
| 5 stations | SOL.a 5 (-) | (+) Yellow | None |
| | SOL.b 18 (-) | (+) Gray | None |
| 6 stations | SOL.a 6 (-) | (+) Pink | None |
| | SOL.b 19 (-) | (+) Orange | Black |
| 7 stations | SOL.a 7 (-) | (+) Blue | None |
| | SOL.b 20 (-) | (+) Red | White |
| 8 stations | SOL.a 8 (-) | (+) Purple | White |
| | SOL.b 21 (-) | (+) Brown | White |
| 9 stations | SOL.a 9 (-) | (+) Gray | Black |
| | SOL.b 22 (-) | (+) Pink | Red |
| 10 stations | SOL.a 10 (-) | (+) White | Black |
| | SOL.b 23 (-) | (+) Gray | Red |
| 11 stations | SOL.a 11 (-) | (+) White | Red |
| | SOL.b 24 (-) | (+) Black | White |
| 12 stations | SOL.a 12 (-) | (+) Yellow | Red |
| | SOL.b 25 (-) | (+) White | None |
| | COM. 13 (+) | (-) Orange | Red |

Positive common specifications Negative common specifications

Note) When using the negative common specifications, use values for negative common.

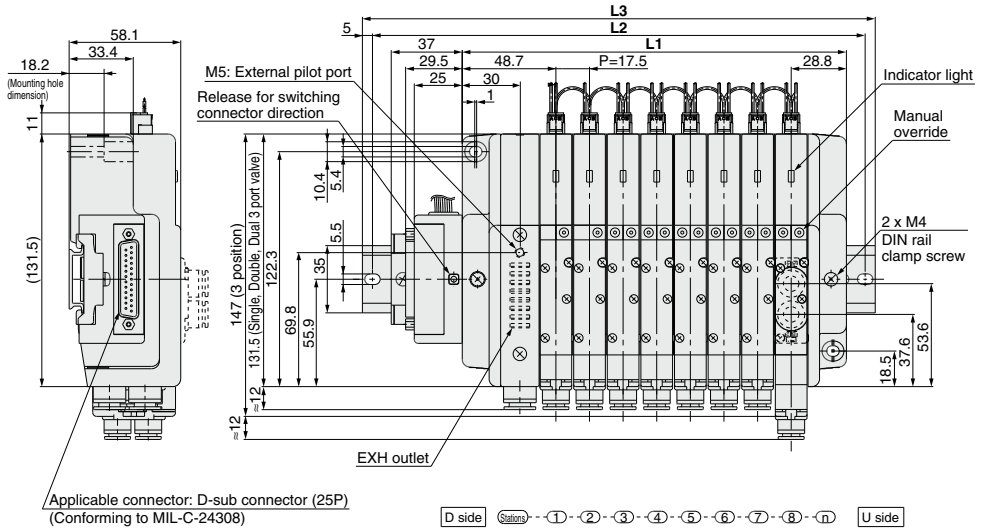

- SQ**
- VQZ**
- VQC 4/5**
- VQC 1/2**
- VQ 4/5**
- VQ 1/2**
- VP4**
- VF**
- SZ**
- SYJ**
- SV**


Dimensions

Formula: $L1 = 17.5n + 60$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 77.5 | 95 | 112.5 | 130 | 147.5 | 165 | 182.5 | 200 | 217.5 | 235 | 252.5 | 270 | 287.5 | 305 | 322.5 | 340 |
| L2 | | 137.5 | 162.5 | 175 | 187.5 | 212.5 | 225 | 250 | 262.5 | 275 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 |
| L3 | | 148 | 173 | 185.5 | 198 | 223 | 235.5 | 260.5 | 273 | 285.5 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 |

SQ2000 Series

P Kit (Flat Ribbon Cable Connector)



- Simplification and labor savings for wiring work can be achieved by using a MIL type for the electrical connection.
- Using the connector for flat ribbon cable (26P, 20P) conforming to MIL standard permits the use of connectors put on the market and gives a wide interchangeability.
- Top or side receptacle position can be selected in accordance with the available mounting space.


Manifold Specifications

| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|--|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 12 stations (16 as a semi-standard) |
| | | 4(A), 2(B) | |

Flat Ribbon Cable (26 Pins, 20 Pins)

AXT100-FC²⁰₂₆₋₃

(Type 26P flat ribbon cable connector assemblies can be ordered with manifolds. Refer to "How to Order manifold".)

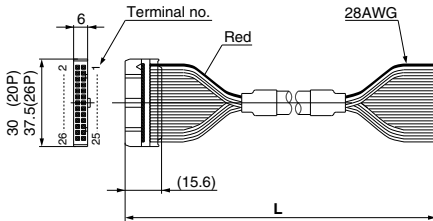


Flat Ribbon Cable Connector Assembly

| Cable length (L) | Assembly part no. | |
|------------------|-------------------|---------------|
| | 26P | 20P |
| 1.5 m | AXT100-FC26-1 | AXT100-FC20-1 |
| 3 m | AXT100-FC26-2 | AXT100-FC20-2 |
| 5 m | AXT100-FC26-3 | AXT100-FC20-3 |

- * For other commercial connectors, use a 26 pins or 20 pins with strain relief conforming to MIL-C-83503.
- * Cannot be used for movable wiring.
- * Lengths other than the above are also available. Please contact SMC for details.

Connector manufacturers' example

- HIROSE ELECTRIC CO., LTD.
- 3M Japan Limited
- Fujitsu Limited
- Japan Aviation Electronics Industry, Limited
- J.S.T. Mfg. Co., Ltd.
- Oki Electric Cable Co., Ltd.




Electrical Wiring Specifications

Flat ribbon cable connector


Double wiring (connected to SOL. A and SOL. B) is adopted for the internal wiring of each station, regardless of valve and option types. Mixed single and double wiring is available as an option. For details, refer to page 866.

Connector terminal no.

Triangle mark indicator position

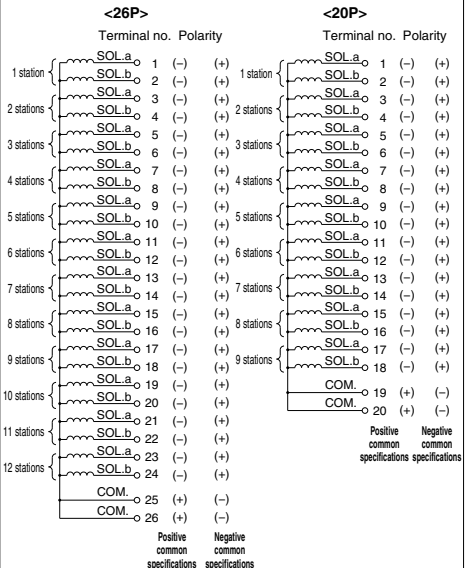

Note) When using the negative common specifications, use valves for negative common.

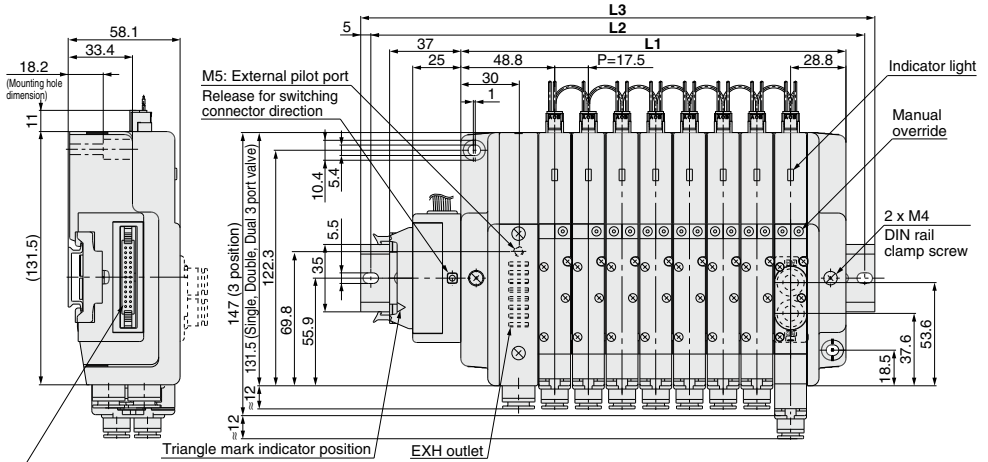

Applicable connector: Flat ribbon cable connector (26P)
(Conforming to MIL-C-83503)

- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- VQ 1/2**
- VQ 4/5**
- VQC 1/2**
- VQC 4/5**
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

Dimensions


Formula: L1 = 17.5n + 60 n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-----------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 77.5 | 95 | 112.5 | 130 | 147.5 | 165 | 182.5 | 200 | 217.5 | 235 | 252.5 | 270 | 287.5 | 305 | 322.5 | 340 |
| L2 | | 137.5 | 162.5 | 175 | 187.5 | 212.5 | 225 | 250 | 262.5 | 275 | 300 | 312.5 | 337.5 | 350 | 362.5 | 387.5 | 400 |
| L3 | | 148 | 173 | 185.5 | 198 | 223 | 235.5 | 260.5 | 273 | 285.5 | 310.5 | 323 | 348 | 360.5 | 373 | 398 | 410.5 |

| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ2000 Series


C Kit (Connector)



- Standard with lead wires connected to each valve individually.

Manifold Specifications

| Series | Porting specifications | | Maximum number of stations |
|--------|------------------------|------------|----------------------------|
| | Port location | Port size | |
| SQ2000 | Side, Top | 1(P), 3(R) | 4(A), 2(B) |
| | | C10 | C4, C6, C8 |




* Valves are numbered from the D side.


● Wiring Specifications: Positive Common Specifications

Since lead wires are connected to the valves as shown below, connect each wire to the power supply.

Single solenoid



Double solenoid



● Plug connector lead wire length

The lead wire length of the valves with lead wire is 300 mm. When ordering a lead wire length of 600 mm or longer, list the part numbers for the valve without connector and the connector assembly.
Example) For lead wire length of 1000 mm: SQ2140-5LO1-C6...3 pcs.
AXT661-14AL-10...3 pcs.


Connector Assembly Part No.

| Lead wire length | Single solenoid | Double solenoid |
|----------------------|-----------------|-----------------|
| Socket only (3 pcs.) | AXT661-12AL | |
| 300 mm | AXT661-14AL | AXT661-13AL |
| 600 mm | AXT661-14AL-6 | AXT661-13AL-6 |
| 1000 mm | AXT661-14AL-10 | AXT661-13AL-10 |
| 2000 mm | AXT661-14AL-20 | AXT661-13AL-20 |
| 3000 mm | AXT661-14AL-30 | AXT661-13AL-30 |


● Wiring Specifications: Negative Common Specifications (Semi-standard)

Since lead wires are connected to the valves as shown below, connect each wire to the power supply.

Single solenoid



Double solenoid

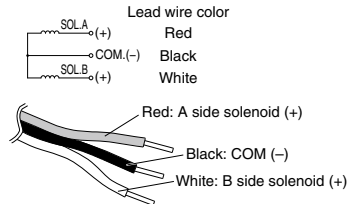


● Plug connector lead wire length

The lead wire length of the valves with lead wire is 300 mm. When ordering a lead wire length of 600 mm or longer, list the part numbers for the valve without connector and the connector assembly.
Example) For lead wire length of 1000 mm: SQ2140N-5LO1-C6...3 pcs.
AXT661-14ANL-10...3 pcs.

Connector Assembly Part No.

| Lead wire length | Single solenoid | Double solenoid |
|----------------------|-----------------|-----------------|
| Socket only (3 pcs.) | AXT661-12AL | |
| 300 mm | AXT661-14ANL | AXT661-13ANL |
| 600 mm | AXT661-14ANL-6 | AXT661-13ANL-6 |
| 1000 mm | AXT661-14ANL-10 | AXT661-13ANL-10 |
| 2000 mm | AXT661-14ANL-20 | AXT661-13ANL-20 |
| 3000 mm | AXT661-14ANL-30 | AXT661-13ANL-30 |

Note) When using the negative common specifications, use valves for negative common.

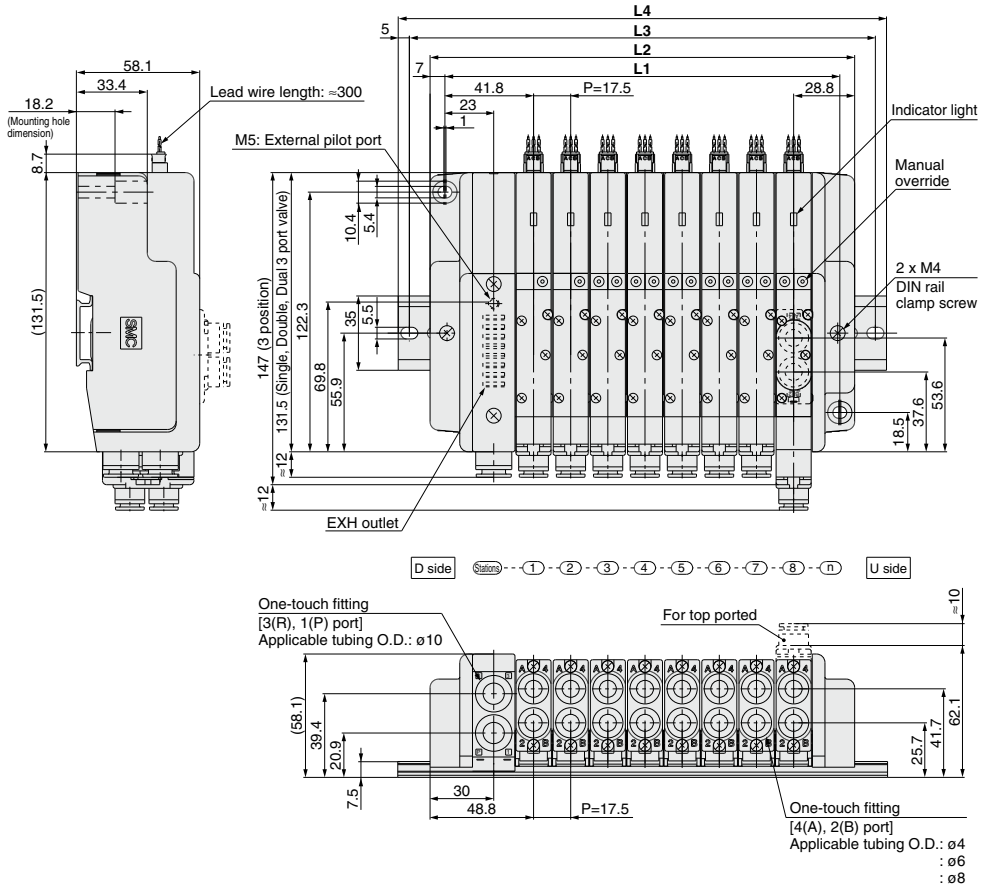

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ**
- VFS
- VFR
- VQ7

Dimensions

Formula: $L1 = 17.5n + 46$, $L2 = 17.5n + 60$ n: Stations (Maximum 16 stations)

| L | n | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|----|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 | | 63.5 | 81 | 98.5 | 116 | 133.5 | 151 | 168.5 | 186 | 203.5 | 221 | 238.5 | 256 | 273.5 | 291 | 308.5 | 326 |
| L2 | | 77.5 | 95 | 112.5 | 130 | 147.5 | 165 | 182.5 | 200 | 217.5 | 235 | 252.5 | 270 | 287.5 | 305 | 322.5 | 340 |
| L3 | | 100 | 125 | 137.5 | 150 | 175 | 187.5 | 212.5 | 225 | 237.5 | 262.5 | 275 | 300 | 312.5 | 325 | 350 | 362.5 |
| L4 | | 110.5 | 135.5 | 148 | 160.5 | 185.5 | 198 | 223 | 235.5 | 248 | 273 | 285.5 | 310.5 | 323 | 335.5 | 360.5 | 373 |

SQ1000 Series



Manifold Option Parts for SQ1000

Blanking plate

SSQ1000-10A-4

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.

* Electrical wiring is connected to the manifold station with the blanking plate.



Symbol



SUP/EXH block

SSQ1000-PR-4-C8-□

Port size

| | |
|-----------|-------------------------------------|
| C8 | One-touch fittings for $\phi 8$ |
| N9 | One-touch fittings for $\phi 5/16"$ |

Option

| | |
|------------|-------------------------------|
| Nil | Standard |
| R | External pilot specifications |
| S | Built-in silencer |

Note) When specifying both options, indicate "RS".


* Specify the spacer mounting position on the manifold specification sheet.

For standard type manifolds, the SUP/EXH block is mounted on the D side.


It is added to the manifold to increase SUP/EXH capacity.

* The number of SUP/EXH blocks that can be added is limited to two sets, one between manifold stations and another on the U side of the manifold, due to the length of the lead wire.

* SUP/EXH blocks are not included in the number of manifold stations.



| Description/Model | Stations | | | | |
|-------------------|----------|--------|--------|--------|--------|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | Single | Single | Single | Single |
| Option | | | | | |
| SUP/EXH block | | | | | |
| SSQ1000-PR-4-C8-□ | | | | | |

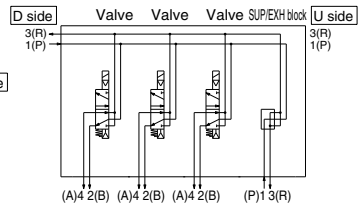

Individual SUP spacer

SSQ1000-P-4-C6

Port size

| | | |
|-------------|------------|------------------------------------|
| Side ported | C6 | One-touch fittings for $\phi 6$ |
| | N7 | One-touch fittings for $\phi 1/4"$ |
| Top ported | L6 | One-touch fittings for $\phi 6$ |
| | LN7 | One-touch fittings for $\phi 1/4"$ |

This is used as a supply port for different pressures when using different pressures in the same manifold (for one station). Both sides of the station which is used with supply pressure from the individual SUP spacer are shut off. (Refer to application example.)

* Specify the spacer mounting position and SUP passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit.

(Two pieces of SUP block plate that shut off the supply pressure are included with the individual SUP spacer, therefore, it is not necessary to order them separately.)


* No electrical wiring is connected to the manifold station with the individual SUP spacer. When the wiring needs to be connected to the stations with the individual SUP spacer mounted, specify it on the manifold specification sheet.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual SUP spacer to the individual EXH spacer).



* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.

* Model no. with manifold block:
SSQ1000-P-4-C6-M


Side ported



Top ported



| Description/Model | Stations | | | | |
|--|----------|--------|--------|--------|--------|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | Single | Single | Single | Single |
| Option | | | | | |
| Individual SUP spacer | | | | | |
| SUP shut off position: Please specify. | | | | | |

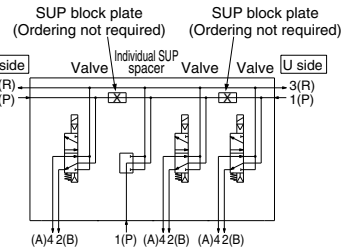

Individual EXH spacer

SSQ1000-R-4-C6

● **Port size**

| | | |
|-------------|------------|------------------------------------|
| Side ported | C6 | One-touch fittings for $\phi 6$ |
| Top ported | N7 | One-touch fittings for $\phi 1/4"$ |
| Side ported | L6 | One-touch fittings for $\phi 6$ |
| Top ported | LN7 | One-touch fittings for $\phi 1/4"$ |

This is used to exhaust an individual valve when the exhaust from a valve interferes with other stations in the circuit (used for one station). Both sides of the station which is to be individually exhausted are shut off. (Refer to application example.)

* Specify the spacer mounting position and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit.

(Two pieces of EXH block plate that shut off the exhaust are included with the individual EXH spacer, therefore, it is not necessary to order them separately.)

* No electrical wiring is connected to the manifold station with the individual EXH spacer.


When the wiring needs to be connected to the stations with the individual EXH spacer mounted, specify it on the manifold specification sheet.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual EXH spacer to the individual SUP spacer).



* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.

* Model no. with manifold block:
SSQ1000-R-4-C6-M
L6


Side ported



Top ported



| Description/Model | Stations | | | | |
|-------------------|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Option | Individual EXH spacer SSQ1000-R-4-C6 | | | | |
| Option | EXH shut off position: Please specify. | | | | |

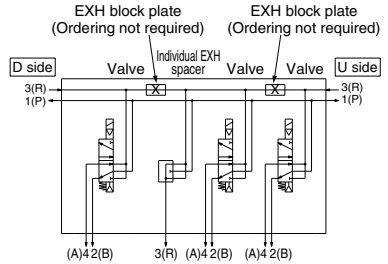

Individual SUP/EXH spacer

SSQ1000-PR1-4-C6

● **Port size**

| | | |
|-------------|------------|------------------------------------|
| Side ported | C6 | One-touch fittings for $\phi 6$ |
| Top ported | N7 | One-touch fittings for $\phi 1/4"$ |
| Side ported | L6 | One-touch fittings for $\phi 6$ |
| Top ported | LN7 | One-touch fittings for $\phi 1/4"$ |

This has both functions of the individual SUP and EXH spacers above.

(Refer to application example.)

* Specify the spacer mounting position and SUP and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions each for SUP and EXH can be specified per unit.

(Two pieces each of block plate that shut off the SUP and EXH passages are included with the individual SUP/EXH spacer, therefore, it is not necessary to order them separately.)

* No electrical wiring is connected to the manifold station with the individual SUP/EXH spacer.

When the wiring needs to be connected to the stations with the individual SUP/EXH spacer mounted, specify it on the manifold specification sheet.


* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later.

* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.



* Model no. with manifold block:
SSQ1000-PR1-4-C6-M
L6

* Do not install any back pressure check valve on the manifold station, on which the spacer is to be mounted. When installing the back pressure check valve on other manifold station, be sure to specify the manifold station position on the manifold specification sheet instead of ordering by specifying the manifold option symbol "B".


Side ported



Top ported



| Description/Model | Stations | | | | |
|-------------------|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Option | Individual SUP/EXH spacer SSQ1000-PR1-4-C6 | | | | |
| Option | SUP shut off position: Please specify. | | | | |
| Option | EXH shut off position: Please specify. | | | | |

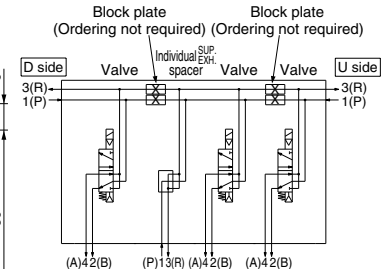

| |
|---------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Manifold Option Parts for SQ1000

SUP block plate

SSQ1000-B-P


When supplying two different pressures, high and low, to one manifold, this is used between stations with different pressures. Also, it is used with an individual SUP spacer to shut off the air supply.

* Specify the station position on the manifold specification sheet.

<Block indication label>

When using block plates for SUP passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for SUP incorporated with the manifold, a block indication label is attached to the manifold.

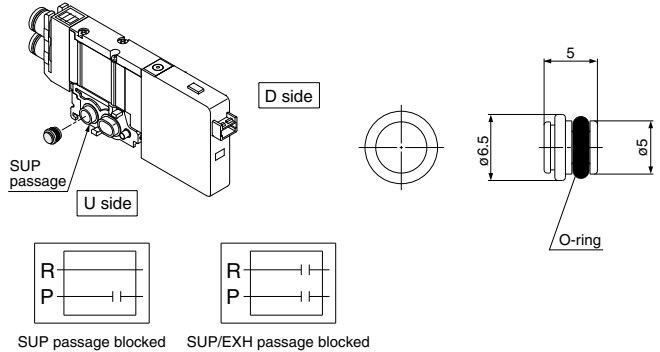

EXH block plate

SSQ1000-B-R

When the exhaust from a valve interferes with other stations in the circuit, this is used between stations to separate exhausts. Also, it is used with an individual EXH spacer to shut off the exhaust of individual valves.


* Specify the station position on the manifold specification sheet.

* Be sure to discharge the exhaust inside the EXH passage from the R port of the SUP/EXH block, etc. so that the exhaust pressure is not sealed.

<Block indication label>

When using block plates for EXH passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for EXH incorporated with the manifold, a block indication label is attached to the manifold.

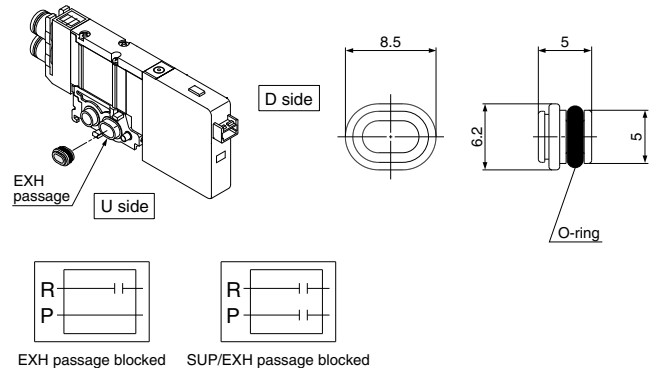


Back pressure check valve [-B]

SSQ1000-BP

It prevents cylinder malfunction caused by other valve exhaust. Insert it into R (EXH) port on the manifold side of a valve which is affected. It is effective when a single action cylinder is used or an exhaust center type solenoid valve is used.

* When a check valve for back pressure prevention is desired, and is to be installed only in certain manifold stations, clearly write the part number and specify the number of stations on the manifold specification sheet.

* When ordering this option incorporated with a manifold, suffix "-B" to the end of the manifold part number.

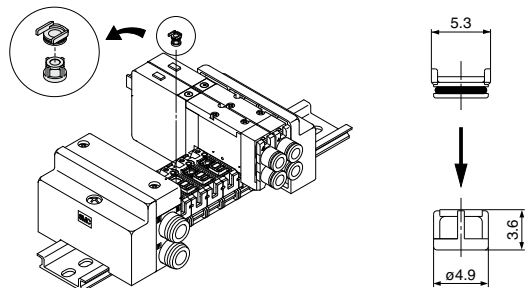

⚠ Caution

1. The back pressure check valve assembly is assembly parts with a check valve structure. However, as slight air leakage is allowed for the back pressure, take care the exhaust air will not be restricted at the exhaust port.
2. When a back pressure check valve is mounted, the effective area of the valve will decrease by about 20%.
3. Since 4 port specification valves (5 (R1) and 3 (R2) are common) are used, back pressure cannot be prevented with dual 3 port valves.


Name plate [-N]

SSQ1000-N3-Stations (1 to maximum)

It is a transparent resin plate for placing a label that indicates solenoid valve function, etc.


Insert it into the groove on the side of the end plate and bend it as shown in the figure. Also, the plate is difficult to bend for manifolds with only a few stations, therefore, remove the silencer cover to install it.

* When ordering this option incorporated with a manifold, suffix "-N" to the end of the manifold part number.

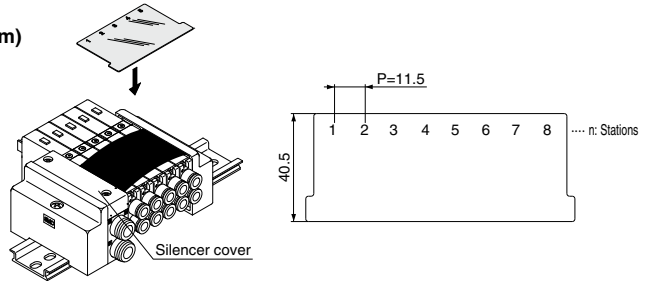


Blanking plug (For One-touch fitting)

23
KQ2P-
04
06
08



It is inserted into an unused cylinder port and SUP/EXH ports.

Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ød | Model | A | L | D |
|-----------------------------|---------|------|------|----|
| 3.2 | KQ2P-23 | 16 | 31.5 | 5 |
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |

Port plug

VVQZ100-CP

The plug is used to block the cylinder port when using a 5-port valve as a 3-port valve.

* Add "A" or "B" at the end of the valve part number when ordering with valves.

Example) SQ1141-5L1-C6-A (N.O. specifications)


↓ 4 (A) port plug

Example) SQ1141-5L1-C6-B (N.C. specifications)

↓ 2 (B) port plug

Example) SQ1141-5L1-C6-B-M

(B port plug with manifold block)

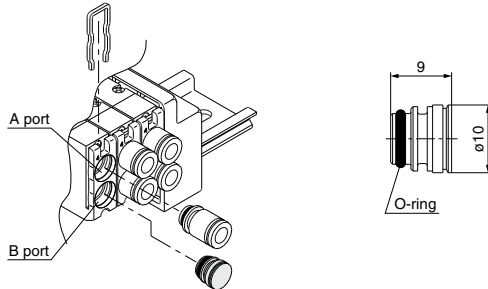


Direct EXH outlet, built-in silencer [-S]

This is a type with an exhaust port atop the manifold end plate. The built-in silencer exhibits an excellent noise suppression effect. (Noise reduction: 30 dB)

Note) A large quantity of drainage generated in the air source results in exhaust of air together with drainage.

* When ordering this option incorporated with a manifold, suffix "-S" to the end of the manifold part number.

* For precautions on handling and how to replace elements, refer to page 881.



SV

SYJ

SZ

VF

VP4

VQ

1/2

VQ

4/5

VQC

1/2

VQC

4/5

VQZ

SQ

VFS

VFR

VQ7

SQ1000 Series

Manifold Option Parts for SQ1000

External pilot specifications [-R]

This can be used when the air pressure is 0.1 to 0.2 MPa lower than the minimum operating pressure of the solenoid valves or used for vacuum specifications.

Add "R" to the part numbers of manifolds and valves to indicate the external pilot specification. An M5 port will be installed on the top side of the manifold's SUP/EXH block.

- How to order valves (Example)
SQ1140 **R**-5L1-C6


↓ External pilot specifications

- How to order manifold (Example)

* Indicate "R" for an option.

SSSQ14-08FD1-DR

↓ External pilot specifications

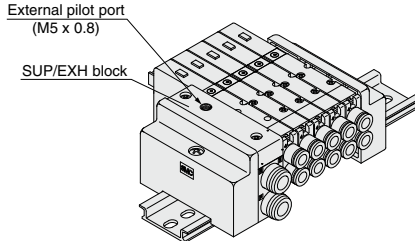

Note 1) Not applicable for dual 3 port valves.

Note 2) Valves with the external pilot specifications have a pilot EXH with individual exhaust specifications and EXH can be pressurized. However, the pressure supplied from EXH should be 0.4 MPa or lower.

Dual flow fitting

SSQ1000-52A-C8

| | |
|-----------|--------|
| Port size | |
| C8 | ø8 |
| N9 | ø5/16" |



To drive a large bore cylinder, two valve stations are operated simultaneously to double the air flow. This fitting is used on the cylinder ports in this situation. Available sizes are ø8 and ø5/16" One-touch fitting.

* When ordering with valves, specify the valve part number without One-touch fitting and list the dual flow fitting part number.

Example) Valve part number (without One-touch fitting part number)


SQ1141-5L1-C0 2 sets

* SSSQ1000-52A-C8 1 set

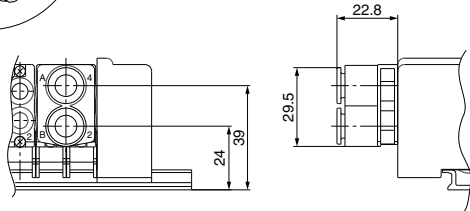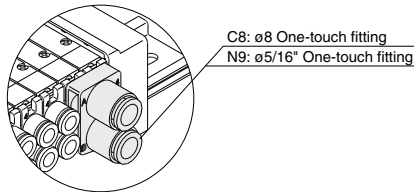

Silencer (For EXH port)

This is inserted into the centralized type EXH port (One-touch fitting).

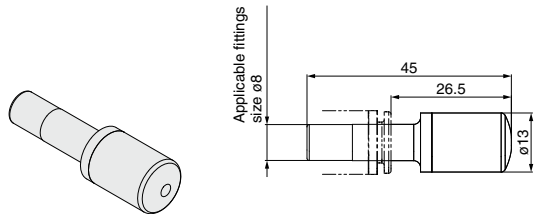

Specifications

| Series | Model | Effective area (mm ²) (Cv factor) | Noise reduction (dB) |
|--------|----------|--|----------------------|
| SQ1000 | AN15-C08 | 20 (1.1) | 30 |



Manifold Option Parts for SQ2000

Blanking plate

SSQ2000-10A-4

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.

* Electrical wiring is connected to the manifold station with the blanking plate.



Symbol



SUP/EXH block

SSQ2000-PR-3-C10

Port size

| | |
|------------|-------------------------------|
| C8 | One-touch fittings for ø8 |
| C10 | One-touch fittings for ø10 |
| N9 | One-touch fittings for ø5/16" |
| N11 | One-touch fittings for ø3/8" |

Option

| | |
|------------|-------------------------------|
| Nil | Standard |
| R | External pilot specifications |
| S | Built-in silencer |

(Note) When specifying both options, indicate "RS".


* Specify the spacer mounting position on the manifold specification sheet.

For standard type manifolds, the SUP/EXH block is mounted on the D side.


It is added to the manifold to increase SUP/EXH capacity.

* The number of SUP/EXH blocks that can be added is limited to two sets, one between manifold stations and another on the U side of manifold, due to the length of the lead wire.

* SUP/EXH blocks are not included in the number of manifold stations.



| | | Stations | | | | |
|-------------------|------------------|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | ● | ● | ● | | |
| | : | | | | | |
| Option | SUP/EXH block | | | | ● | |
| | SSQ2000-PR-3-C10 | | | | | |

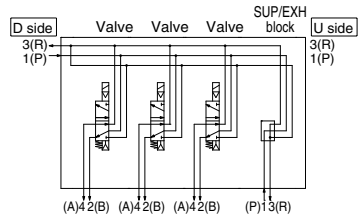

Individual SUP spacer

SSQ2000-P-4-C8

Port size

| | | |
|-------------|------------|-------------------------------|
| Side ported | C8 | One-touch fittings for ø8 |
| Top ported | N9 | One-touch fittings for ø5/16" |
| Top ported | L8 | One-touch fittings for ø8 |
| | LN9 | One-touch fittings for ø5/16" |

This is used as a supply port for different pressures when using different pressures in the same manifold (for one station).

Both sides of the station which is used with supply pressure from the individual SUP spacer are shut off. (Refer to application example.)

* Specify the spacer mounting position and SUP passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit.

(Two pieces of SUP block plate that shut off the supply pressure are included with the individual SUP spacer, therefore, it is not necessary to order them separately.)


* No electrical wiring is connected to the manifold station with the individual SUP spacer. When the wiring needs to be connected to the stations with the individual SUP spacer mounted, specify it on the manifold specification sheet.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual SUP spacer to the individual EXH spacer).



* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.

* Model no. with manifold block: SSQ2000-P-4-C8-M


Side ported



Top ported



| | | Stations | | | | |
|-------------------|--|----------|---|---|---|---|
| Description/Model | | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | ● | ● | ● | | |
| | : | | | | | |
| Option | Individual SUP spacer | | ● | | | |
| | SUP shut off position: Please specify. | ● | ● | | | |

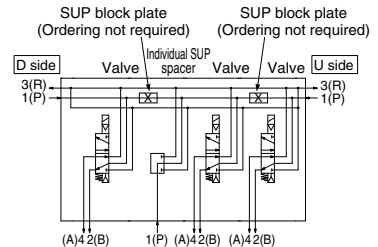

SQ2000 Series

Manifold Option Parts for SQ2000

Individual EXH spacer

SSQ2000-R-4-C8

Port size

| | | |
|-------------|------------|-------------------------------|
| Side ported | C8 | One-touch fittings for ø8 |
| ported | N9 | One-touch fittings for ø5/16" |
| Top ported | L8 | One-touch fittings for ø8 |
| ported | LN9 | One-touch fittings for ø5/16" |

This is used to exhaust an individual valve when the exhaust from a valve interferes with other stations in the circuit (used for one station). Both sides of the station which is to be individually exhausted are shut off. (Refer to application example.)

* Specify the spacer mounting position and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions can be specified per unit.

(Four pieces of EXH block plate that shut off the exhaust are included with the individual EXH spacer, therefore, it is not necessary to order them separately.)


* No electrical wiring is connected to the manifold station with the individual EXH spacer. When the wiring needs to be connected to the stations with the individual EXH spacer mounted, specify it on the manifold specification sheet.

* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later (from the individual EXH spacer to the individual SUP spacer).


* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.

* Model no. with manifold block:
SSQ2000-R-4-C8-M
L8


Side ported



Top ported

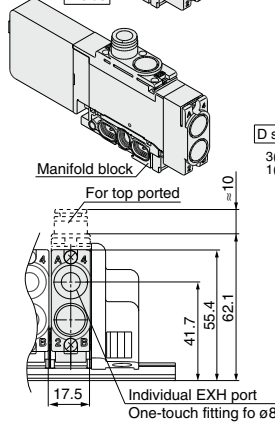

| Description/Model | Stations | | | | |
|-------------------|--|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual EXH spacer SSQ2000-R-4-C8 | | | | |
| Option | EXH shut off position: Please specify. | | | | |

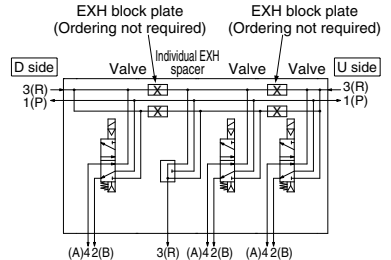

Individual SUP/EXH spacer

SSQ2000-PR1-4-C8

Port size

| | | |
|-------------|------------|-------------------------------|
| Side ported | C8 | One-touch fittings for ø8 |
| ported | N9 | One-touch fittings for ø5/16" |
| Top ported | L8 | One-touch fittings for ø8 |
| ported | LN9 | One-touch fittings for ø5/16" |

This has both functions of the individual SUP and EXH spacers above. (Refer to application example.)

* Specify the spacer mounting position and SUP and EXH passage shut off positions on the manifold specification sheet. Up to two shut off positions each for SUP and EXH can be specified per unit. [Block plates that shut off the SUP and EXH passages are included with the individual SUP/EXH spacer, therefore, it is not necessary to order them separately (2 pcs. of SUP block plate and 4 pcs. of EXH block plate).]

* No electrical wiring is connected to the manifold station with the individual SUP/EXH spacer. When the wiring needs to be connected to the stations with the individual SUP/EXH spacer mounted, specify it on the manifold specification sheet.


* By changing the fitting shown in the drawing and the block plates, the spacer's specification can be changed later.

* The number of spacers is not limited when ordered with the manifold. However, when adding individual for F, P, and J kits, it is limited to two units, one between manifold stations and another on the U side, due to the length of the lead wire.


* Model no. with manifold block:
SSQ2000-PR1-4-C8-M
L8

* Do not install any back pressure check valve on the manifold station, on which the spacer is to be mounted. When installing the back pressure check valve on other manifold station, be sure to specify the manifold station position on the manifold specification sheet instead of ordering by specifying the manifold option symbol "B".


Side ported



Top ported

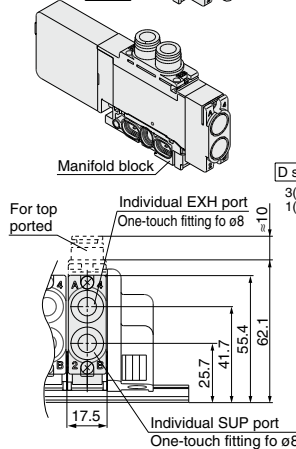

| Description/Model | Stations | | | | |
|-------------------|--|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 |
| Valve | Single | | | | |
| Option | Individual SUP/EXH spacer SSQ2000-PR1-4-C8 | | | | |
| Option | SUP shut off position: Please specify. | | | | |
| Option | EXH shut off position: Please specify. | | | | |

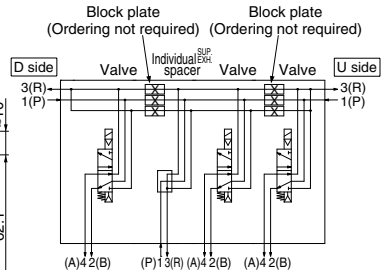

SUP block plate

SSQ1000-B-R

When supplying two different pressures, high and low, to one manifold, this is used between stations with different pressures.


Also, it is used with an individual SUP spacer to shut off the air supply.

* Specify the station position on the manifold specification sheet.

<Block indication label>

When using block plates for SUP passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for SUP incorporated with the manifold, a block indication label is attached to the manifold.

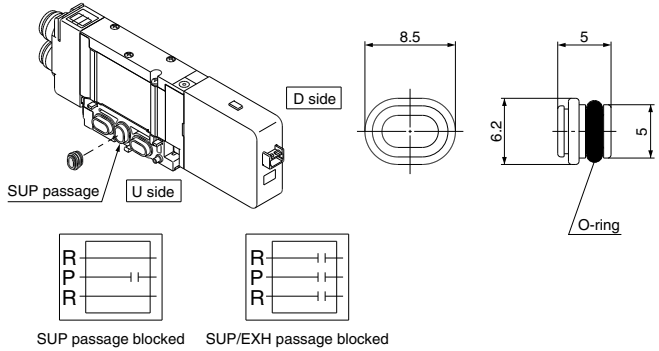

| |
|-----------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

EXH block plate

SSQ2000-B-R

When the exhaust from a valve interferes with other stations in the circuit, this is used between stations to separate exhausts. Also, it is used with an individual EXH spacer to shut off the exhaust of individual valves.


* Specify the station position on the manifold specification sheet.

* Be sure to discharge the exhaust inside the EXH passage from the R port of the SUP/EXH block, etc. so that the exhaust pressure is not sealed.

<Block indication label>

When using block plates for EXH passage, indication label for confirmation of the blocking position from outside is attached. (One label of each)

* When ordering a block plate for EXH incorporated with the manifold, a block indication label is attached to the manifold.

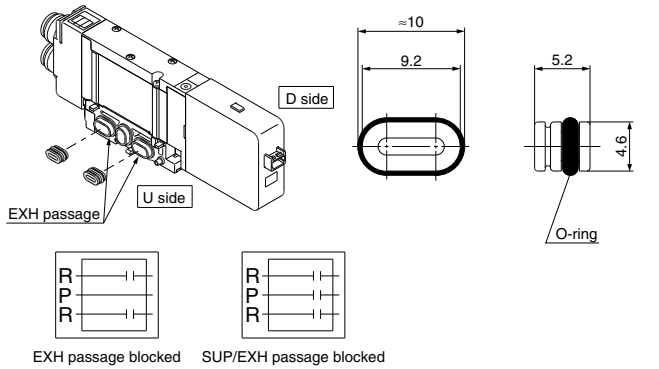


Back pressure check valve [-B]

SSQ2000-BP

It prevents cylinder malfunction caused by other valve exhaust. Insert it into R (EXH) port on the manifold side of a valve which is affected. It is effective when a single action cylinder is used or an exhaust center type solenoid valve is used.

* When a check valve for back pressure prevention is desired, and is to be installed only in certain manifold stations, clearly write the part number and specify the number of stations on the manifold specification sheet.

* When ordering this option incorporated with a manifold, suffix "-B" to the end of the manifold part number.

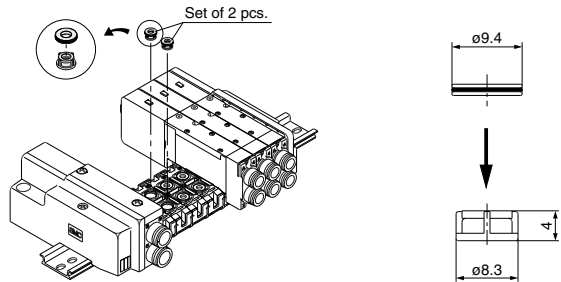

⚠ Caution

1. The back pressure check valve assembly is assembly parts with a check valve structure. However, as slight air leakage is allowed for the back pressure, take care the exhaust air will not be restricted at the exhaust port.
2. When a back pressure check valve is mounted, the effective area of the valve will decrease by about 20%.

SQ2000 Series

Manifold Option Parts for SQ2000


Name plate [-N]

SSQ2000-N3-Stations (1 to maximum)

It is a transparent resin plate for placing a label that indicates solenoid valve function, etc.


Insert it into the groove on the side of the end plate and bend it as shown in the figure. Also, the plate is difficult to bend for manifolds with only a few stations, therefore, remove the silencer cover to install it.

* When ordering this option incorporated with a manifold, suffix "-N" to the end of the manifold part number.

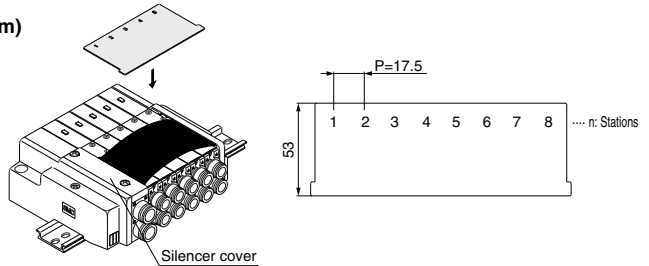


Blanking plug (For One-touch fitting)

04
KQ2P-06
08
10



It is inserted into an unused cylinder port and SUP/EXH ports.

Purchasing order is available in units of 10 pieces.



Dimensions

| Applicable fittings size ϕd | Model | A | L | D |
|-----------------------------------|---------|------|----|----|
| 4 | KQ2P-04 | 16 | 32 | 6 |
| 6 | KQ2P-06 | 18 | 35 | 8 |
| 8 | KQ2P-08 | 20.5 | 39 | 10 |
| 10 | KQ2P-10 | 22 | 43 | 12 |

Port plug

VVQZ2000-CP

The plug is used to block the cylinder port when using a 5-port valve as a 3-port valve.

* Add "A" or "B" at the end of the valve part number when ordering with valves.

Example) SQ2141-5L1-C8-A (N.O. specifications)


↓
4(A) port plug

Example) SQ2141-5L1-C8-B (N.C. specifications)

↓
2(B) port plug

Example) SQ2141-5L1-C8-B-M

(B port plug with manifold block)

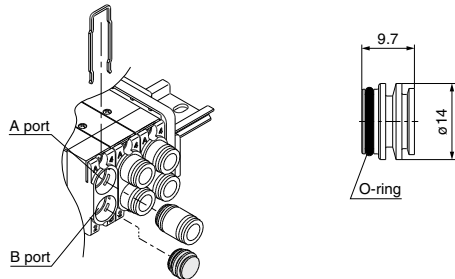


Direct EXH outlet, built-in silencer [-S]

This is a type with an exhaust port atop the manifold end plate. The built-in silencer exhibits an excellent noise suppression effect. (Noise reduction: 30 dB)

Note) A large quantity of drainage generated in the air source results in exhaust of air together with drainage.

* When ordering this option incorporated with a manifold, suffix "-S" to the end of the manifold part number.


* For precautions on handling and how to replace elements, refer to page 881.



External pilot specifications [-R]

This can be used when the air pressure is 0.1 to 0.2 MPa lower than the minimum operating pressure of the solenoid valves or used for vacuum specifications.
 Add "R" to the part numbers of manifolds and valves to indicate the external pilot specifications.
 An M5 port will be installed on the top side of the manifold's SUP/EXH block.

- How to order valves (Example)
 SQ2140 **R** -5L1-C6
 ↓ External pilot specifications
- How to order manifold (Example)
 * Indicate "R" for an option.
 SS5Q24-08FD1-**DR**
 ↓ External pilot specifications

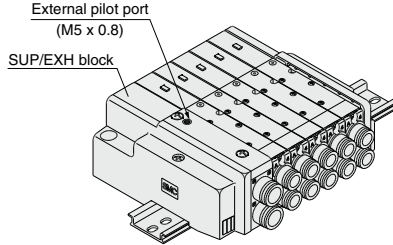

Note 1) Not applicable for dual 3 port valves.
 Note 2) Valves with the external pilot specifications have a pilot EXH with individual exhaust specifications and EXH can be pressurized. However, the pressure supplied from EXH should be 0.4 MPa or lower.


Dual flow fitting

SSQ2000-52A-**C10**

| | |
|-------------|-------|
| ● Port size | |
| C10 | ø10 |
| N11 | ø3/8" |


To drive a large bore cylinder, two valve stations are operated simultaneously to double the air flow. This fitting is used on the cylinder ports in this situation. Available sizes are ø10 and ø3/8" One-touch fittings.
 * When ordering with valves, specify the valve part number without One-touch fitting and list the dual flow fitting part number.

Example) Valve part number (without Onetouch fitting)
 SQ2141-5L1-**C0**..... 2 sets
 * SSQ2000-52A-**C10**..... 1 set
 N11

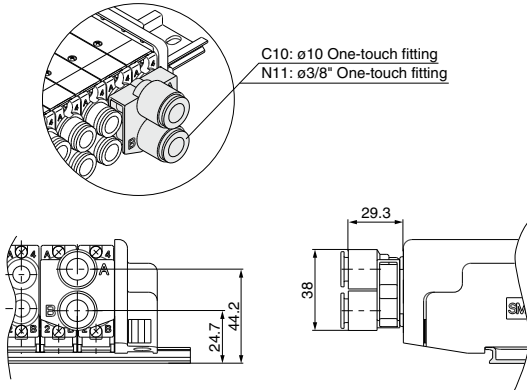

Silencer (For EXH port)

This is inserted into the centralized type EXH port (One-touch fitting).

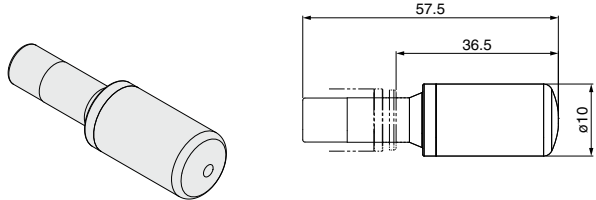

Specifications

| Series | Model | Effective area (mm ²) (Cv factor) | Noise reduction (dB) |
|---------------|----------|--|----------------------|
| SQ2000 | AN20-C10 | 30 (1.6) | 30 |

- SV**
- SYJ**
- SZ**
- VF**
- VP4**
- VQ**
1/2
- VQ**
4/5
- VQC**
1/2
- VQC**
4/5
- VQZ**
- SQ**
- VFS**
- VFR**
- VQ7**

SQ1000/2000 Series

Manifold Option for SQ1000/2000

Special Wiring Specifications

In the internal wiring of F kit and P kit, double wiring (connected to SOL. A and SOL. B) is adopted for each station regardless of the valve and option types. Mixed wiring of single and double wiring can be specified for the wiring specification.

1. How to order


Indicate option symbol "-K" in the manifold part number and be sure to specify station positions for single or double wiring on the manifold specification sheet.

Example) **SS5Q14 - 09 FD0 DKS**

↓ Others, option symbols: to be indicated alphabetically.

2. Wiring specifications

Connector terminal numbers are connected from solenoid station 1 on the A side in the order indicated by the arrows without skipping any terminal numbers.

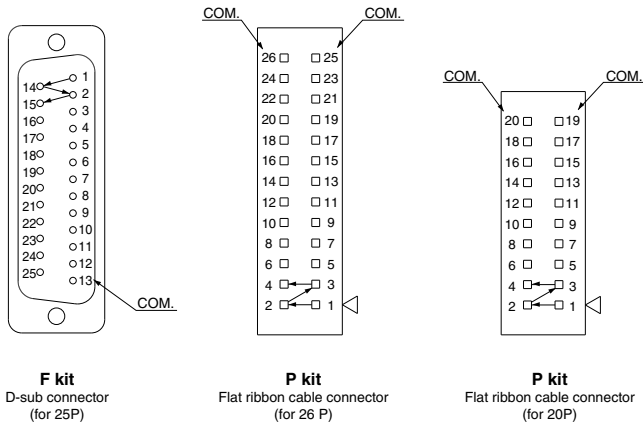

3. Maximum stations

The maximum number of manifold stations is determined by the number of solenoids. Count one point for a single solenoid type and two points for a double solenoid type. Determine the number of stations so that the total number of solenoids is no more than the maximum points in the table below.

| Kit | F kit (D-sub connector) | | P kit (Flat ribbon cable connector) | |
|-------------|----------------------------|------------|--|--|
| | FD□ 25P | PD□ 26P | PDC 20P | |
| Type | | | | |
| Max. points | 24 points | 24 points | 18 points | |

Note) Maximum stations SQ1000: 24 stations
SQ2000: 16 stations

Special DIN Rail Length (DIN Rail Mounting (-D) Only)

The standard DIN rail provided is approximately 30 mm longer than the overall length of the manifold with a specified number of stations. The following options are also available.

● DIN rail length longer than the standard type (for stations to be added later, etc.)

In the manifold part number, specify "-D" for the manifold mounting symbol and add the number of required stations after the symbol.

Example) **SS5Q14- 08FD0 - D09BNK**




● Ordering DIN rail only

DIN rail part number

AXT100- DR -n

Note) For "n", enter a number from the "No." line in the table below.
For L dimension, refer to the dimensions of each kit.

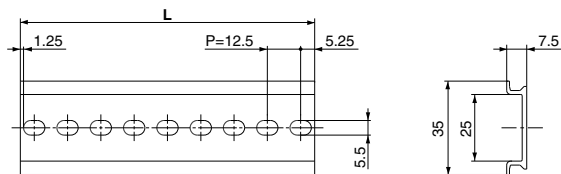

L Dimension

$$L = 12.5 \times n + 10.5$$

| | | | | | | | | | | |
|-------------|----|------|----|------|----|------|----|-------|-----|-------|
| No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| L dimension | 23 | 35.5 | 48 | 60.5 | 73 | 85.5 | 98 | 110.5 | 123 | 135.5 |

| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| L dimension | 148 | 160.5 | 173 | 185.5 | 198 | 210.5 | 223 | 235.5 | 248 | 260.5 |

| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| L dimension | 273 | 285.5 | 298 | 310.5 | 323 | 335.5 | 348 | 360.5 | 373 | 385.5 |


| | | | | | | | | | | |
|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| No. | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 |
| L dimension | 398 | 410.5 | 423 | 435.5 | 448 | 460.5 | 473 | 485.5 | 498 | 510.5 |

Direct Mounting Type (-E) (SQ2000 C Kit Only)

Manifold is mounted by using mounting holes of both sides of the manifold.

DIN rail is not sticking out of the edge of end plate.

Furthermore, the reinforcing part that comes to the bottom of the DIN rail is attached to the end plate assembly.

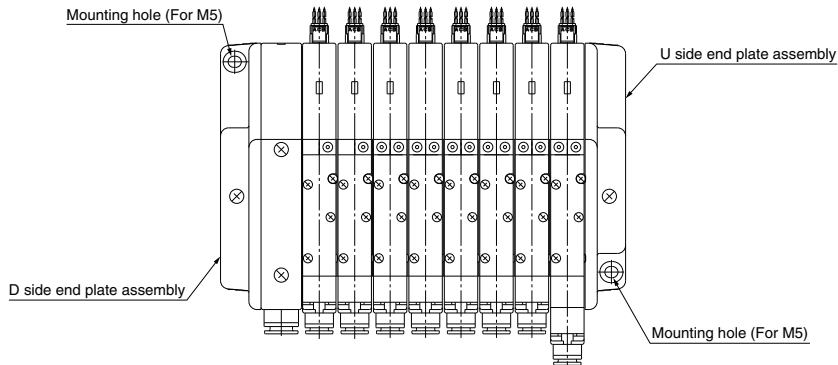

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ
- VFS
- VFR
- VQ7

SQ1000/2000 Series

Manifold Option for SQ1000/2000

Negative Common Specifications

The following valve part numbers are for negative common specifications. Manifold part numbers are the same as standard.

● How to order negative common valves (Example)

SQ1140 N -5L1-C6

↓ Negative common specifications

Inch-size One-touch Fittings

For One-touch fittings in inch sizes, use the following part numbers. Also, the color of the release button is orange.

● How to order valves (Example)

SQ1140-5L1-□ N7

| Port location | |
|---------------|-------------|
| Nil | Side ported |
| L | Top ported |

● Cylinder port

| Symbol | N1 | N3 | N7 | N9 |
|-------------------------------|-------|--------|-------|--------|
| Applicable tubing O.D. (Inch) | ø1/8" | ø5/32" | ø1/4" | ø5/16" |
| 4(A), 2(B) port | ● | ● | ● | — |
| | — | ● | ● | ● |

● How to order manifold (Example)

Add "00T" at the end of the part number.

SS5Q14-08FD0-DN-00T

↓ 1 (P), 3 (R) port in inch size
 { SQ1000: ø5/16" (N9)
 { SQ2000: ø3/8" (N11)



How to Increase Manifold Stations for SQ1000/2000

1. How to Increase Manifold Stations

What to order

- Valves with manifold block (refer to pages 829 and 843) or the manifold blocks shown below. For F kit, P kit, and J kit, also order the lead wire assemblies in the next section.

Manifold Block Part No.
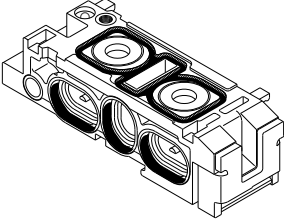
| SQ1000 | SQ2000 | | | | | | | | | | | | |
|--|---|------|---|---------------------------|---|-------------------------------|--|-----|------|---|---------------------------|---|-------------------------------|
|  |  | | | | | | | | | | | | |
| <p>SSQ1000-1A-4-□</p> <p>Option ●</p> <table border="1"> <tbody> <tr> <td>Nil</td> <td>None</td> </tr> <tr> <td>B</td> <td>Back pressure check valve</td> </tr> <tr> <td>R</td> <td>External pilot specifications</td> </tr> </tbody> </table> <p>Note) Enter "-BR" for both options.</p> | Nil | None | B | Back pressure check valve | R | External pilot specifications | <p>SSQ2000-1A-4-□</p> <p>Option ●</p> <table border="1"> <tbody> <tr> <td>Nil</td> <td>None</td> </tr> <tr> <td>B</td> <td>Back pressure check valve</td> </tr> <tr> <td>R</td> <td>External pilot specifications</td> </tr> </tbody> </table> <p>Note) Enter "-BR" for both options.</p> | Nil | None | B | Back pressure check valve | R | External pilot specifications |
| Nil | None | | | | | | | | | | | | |
| B | Back pressure check valve | | | | | | | | | | | | |
| R | External pilot specifications | | | | | | | | | | | | |
| Nil | None | | | | | | | | | | | | |
| B | Back pressure check valve | | | | | | | | | | | | |
| R | External pilot specifications | | | | | | | | | | | | |

How to Increase Manifold Stations for SQ1000/2000


For F kit, P kit

What to order: Lead wire assembly


SQ1000

D-sub connector kit (F kit)

● For single wiring **SSQ1000-40A-F-205**




● For double wiring **SSQ1000-41A-F-280**




| Stations | Symbol (L dimension) | Stations | Symbol (L dimension) |
|------------|----------------------|------------|----------------------|
| Station 2 | 165 | Station 14 | 320 |
| Station 3 | 175 | Station 15 | 335 |
| Station 4 | 190 | Station 16 | 350 |
| Station 5 | 205 | Station 17 | 365 |
| Station 6 | 215 | Station 18 | 375 |
| Station 7 | 230 | Station 19 | 385 |
| Station 8 | 245 | Station 20 | 400 |
| Station 9 | 260 | Station 21 | 405 |
| Station 10 | 280 | Station 22 | 420 |
| Station 11 | 290 | Station 23 | 435 |
| Station 12 | 300 | Station 24 | 450 |
| Station 13 | 310 | | |

Flat ribbon cable kit (P kit)

● For single wiring **SSQ1000-40A-P-200**



● For double wiring **SSQ1000-41A-P-275**




| Stations | Symbol (L dimension) | Stations | Symbol (L dimension) |
|------------|----------------------|------------|----------------------|
| Station 2 | 160 | Station 14 | 315 |
| Station 3 | 170 | Station 15 | 330 |
| Station 4 | 185 | Station 16 | 345 |
| Station 5 | 200 | Station 17 | 360 |
| Station 6 | 210 | Station 18 | 370 |
| Station 7 | 225 | Station 19 | 380 |
| Station 8 | 240 | Station 20 | 395 |
| Station 9 | 255 | Station 21 | 400 |
| Station 10 | 275 | Station 22 | 415 |
| Station 11 | 285 | Station 23 | 430 |
| Station 12 | 295 | Station 24 | 445 |
| Station 13 | 305 | | |


SQ2000

D-sub connector kit (F kit)

● For single wiring **SSQ1000-40A-F-250**




● For double wiring **SSQ1000-41A-F-350**




| Stations | Symbol (L dimension) | Stations | Symbol (L dimension) |
|------------|----------------------|------------|----------------------|
| Station 2 | 190 | Station 14 | 430 |
| Station 3 | 210 | Station 15 | 450 |
| Station 4 | 230 | Station 16 | 470 |
| Station 5 | 250 | Station 17 | 490 |
| Station 6 | 270 | Station 18 | 510 |
| Station 7 | 290 | Station 19 | 530 |
| Station 8 | 310 | Station 20 | 550 |
| Station 9 | 330 | Station 21 | 570 |
| Station 10 | 350 | Station 22 | 590 |
| Station 11 | 370 | Station 23 | 610 |
| Station 12 | 390 | Station 24 | 630 |
| Station 13 | 410 | | |

Flat ribbon cable kit (P kit)

● For single wiring **SSQ1000-40A-P-250**



● For double wiring **SSQ1000-41A-P-350**



| Stations | Symbol (L dimension) | Stations | Symbol (L dimension) |
|------------|----------------------|------------|----------------------|
| Station 2 | 190 | Station 14 | 430 |
| Station 3 | 210 | Station 15 | 450 |
| Station 4 | 230 | Station 16 | 470 |
| Station 5 | 250 | Station 17 | 490 |
| Station 6 | 270 | Station 18 | 510 |
| Station 7 | 290 | Station 19 | 530 |
| Station 8 | 310 | Station 20 | 550 |
| Station 9 | 330 | Station 21 | 570 |
| Station 10 | 350 | Station 22 | 590 |
| Station 11 | 370 | Station 23 | 610 |
| Station 12 | 390 | Station 24 | 630 |
| Station 13 | 410 | | |


| |
|---------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000/2000 Series

How to Increase Manifold Stations for SQ1000/2000

Steps for adding stations


- 1 Loosen the clamp screw on the U side end plate and open the manifold.
- 2 Mount the manifold block or valve with manifold block to be added.
- 3 Press on the end plate to eliminate any space between the manifold blocks and tighten the clamp screw.
(Proper tightening torque: 0.8 to 1.0 N·m)
- 4 In the case of F kit or P kit, remove the connector housing from the DIN rail and connect the wiring.

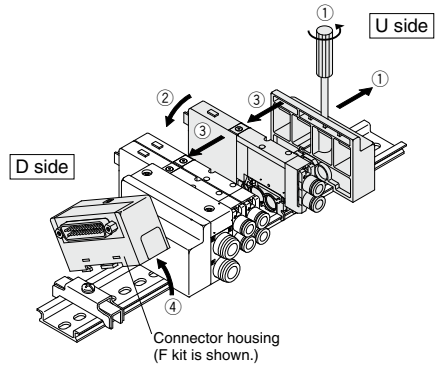

2. Connection Method


(1) Connecting common wire

Insert the red lead wire (common wire) of the connector to be added into the adjacent connector as shown in the drawing below. After inserting, lightly pull on the wire to confirm that the socket is locked.

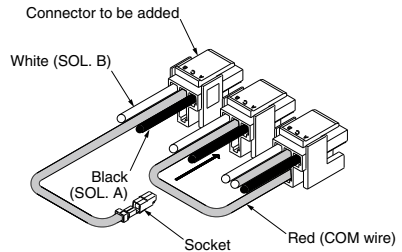

(2) Pulling out connector

Pull out the connector to connect the lead wires for SOL. A and SOL. B. Insert a flat head screwdriver into the slot of the housing cover and remove it. Remove the manual lever and pull out the connector.

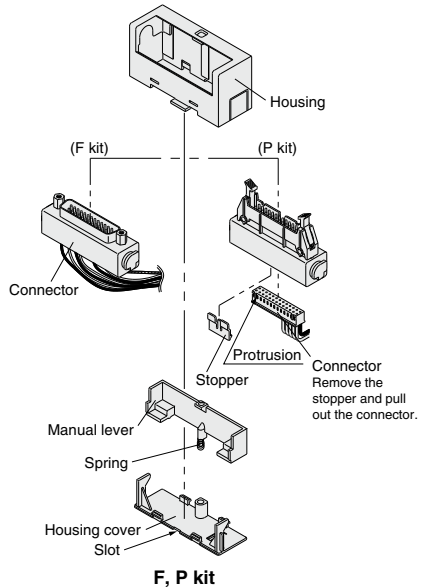


(3) Connector connection/Connect the black and white lead wire pins to the positions shown below in accordance with each kit.

- ⚠ Caution**
- After inserting the pin, confirm that the pin hook is locked by lightly pulling the lead wire.
 - Do not pull the lead wire forcefully when connecting. Also, take care that lead wires do not get caught between manifolds or when remounting the housing.

Wiring (F Kit: D-sub Connector Kit)

Procedure) Based on the manifold specifications, station 1 of SOL.A (black wire) will be terminal number 1 of the D-sub connector, and for station 2 and thereafter, connect black wires, then white wires in the order as shown below by the arrows.

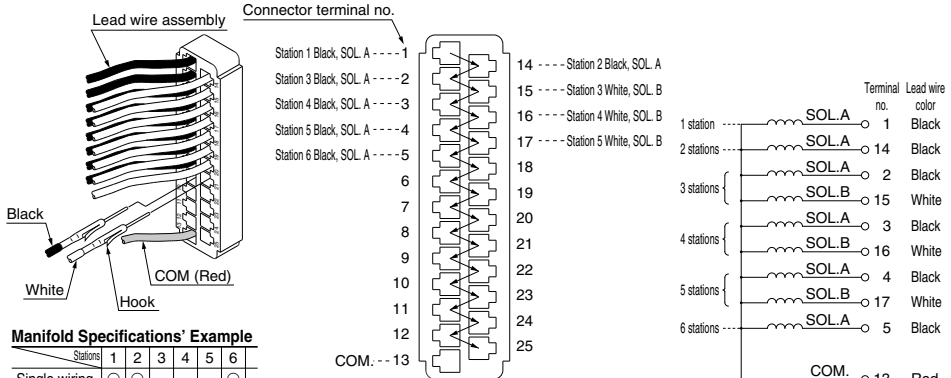


* The drawing above shows connections based on the manifold specifications' example in the table to the left.

| |
|----------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

Wiring (P Kit: Flat Ribbon Cable Kit)

Procedure) Based on the manifold specifications, station 1 of SOL.A (black wire) will be terminal number 1B of the flat ribbon cable connector, and for station 2 and thereafter, connect black wires, then white wires in the order as shown below by the arrows.

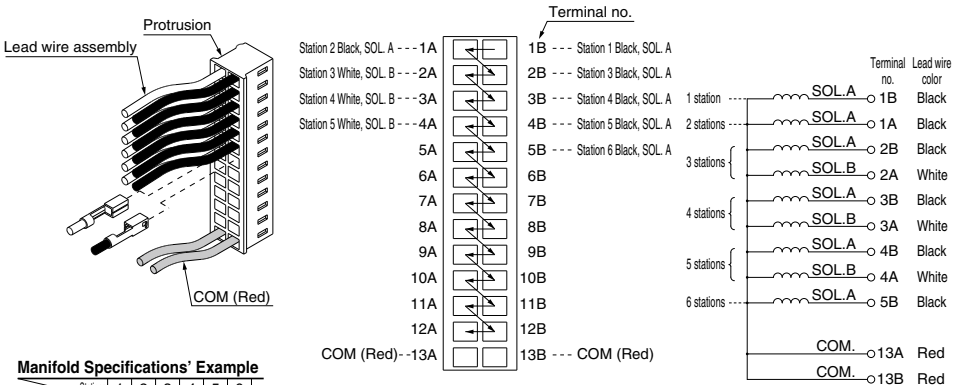

* The drawing above shows connections for type 26P flat ribbon cable connector based on the manifold specifications' example in the table to the left. For type 20P, the connection will be the same as above except that COM changes to 10A and 10B.



| |
|------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series



Construction: SQ1000 Series Plug Lead Type Main Parts and Pilot Valve Assembly

Metal seal type



Single: SQ1140



Double: SQ1240D



3 position: SQ1440³₅



Component Parts

| No. | Description | Material |
|-----|--|------------------------------|
| 1 | Body | Zinc die-casted |
| 2 | Spool/Sleeve | Stainless steel (Metal seal) |
| 2 | Spool | Aluminum (Rubber seal) |
| 3 | Piston | Resin |
| 4 | Pilot valve assembly (Refer to the below.) | — |

Pilot valve assembly

V112 □ - □

Coil voltage

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |



Function

| Symbol | Specifications | DC |
|--------|------------------------------|---------------|
| Nil | Standard type | (0.4 W) ○ |
| B | Quick response type | (0.95 W) ○ |
| K | High pressure type (1.0 MPa) | (0.95 W) ○ |



(Note) Common to single solenoid and double solenoid

Rubber seal type



Single: SQ1141





Double: SQ1241D



3 position: SQ1441³₅





Dual 3 port valve: SQ1^A_B41^C

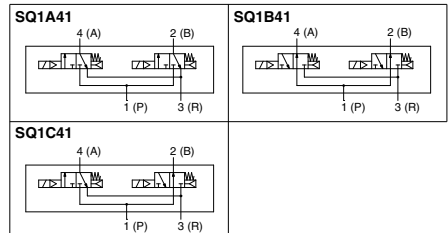



Construction: SQ2000 Series Plug Lead Type Main Parts and Pilot Valve Assembly

Metal seal type



Single: SQ2140



Double: SQ2240D





3 position: SQ2440³₅





Rubber seal type



Single: SQ2141





Double: SQ2241D



3 position: SQ2441³₅



Dual 3 port valve: SQ2^A_B41^C

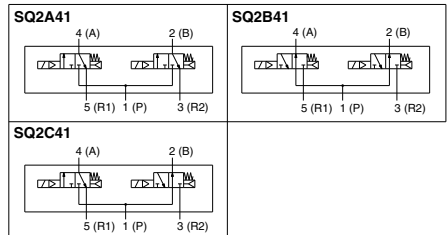

Component Parts

| No. | Description | Material |
|-----|--|------------------------------|
| 1 | Body | Aluminum die-casted |
| 2 | Spool/Sleeve | Stainless steel (Metal seal) |
| 2 | Spool | Aluminum (Rubber seal) |
| 3 | Piston | Resin |
| 4 | Pilot valve assembly (Refer to the below.) | — |

Pilot valve assembly

V112 □ - □

● **Coil voltage**

| | |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

● **Function**

| Symbol | Specifications | DC |
|--------|---------------------|---------------|
| Nil | Standard type | (0.4 W) ○ |
| B | Quick response type | (0.95 W) ○ |


Note) Common to single solenoid and double solenoid

| |
|----------------|
| SV |
| SYJ |
| SZ |
| VF |
| VP4 |
| VQ 1/2 |
| VQ 4/5 |
| VQC 1/2 |
| VQC 4/5 |
| VQZ |
| SQ |
| VFS |
| VFR |
| VQ7 |

SQ1000 Series

Manifold Exploded View: SQ1000 (Plug Lead Type Manifold) SS5Q14

(F, P, C kit)

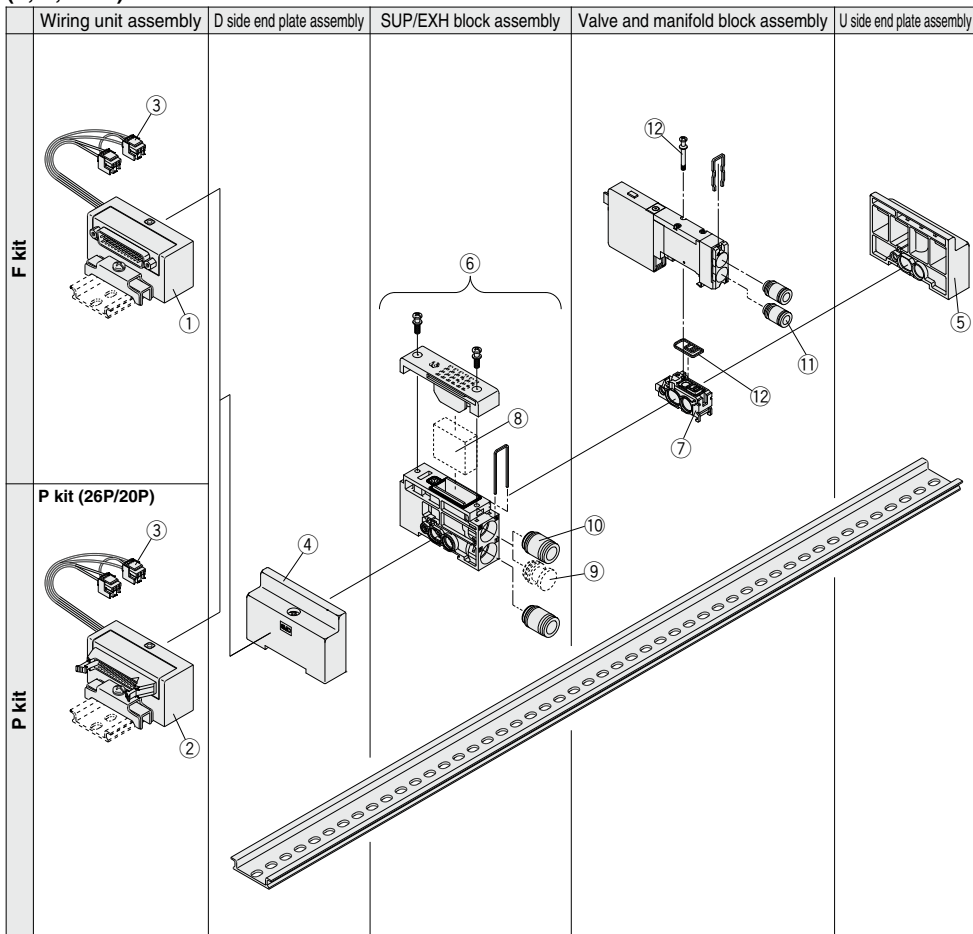

Manifold Spare Parts

Refer to pages 869 to 872 of "How to Increase Manifold Stations" regarding the mounting of each spare parts.

<① D-sub connector housing assembly>

AXT100-40-FL25-S **03**

| | | | |
|--------|---------------|----------|-----------------|
| Wiring | | Stations | |
| S | Single wiring | 01 | For 1 station |
| D | Double wiring | ⋮ | ⋮ |
| | | 24 | For 24 stations |

<② Flat ribbon cable connector housing assembly>

AXT100-40-PL26-PL20-S **03**

| | | | | |
|--------|---------------|-----------------|-----------------|---|
| Wiring | | Stations (Note) | | Note) PL26: 01 to 24 (P kit, 26P) PL20: 01 to 18 (P kit, 20P) |
| S | Single wiring | 01 | For 1 station | |
| D | Double wiring | ⋮ | ⋮ | |
| | | 24 | For 24 stations | |

<③ Lead wire assembly>

(For F kit)

For station 1 **SSQ1000-4** **1** **B-F-155**

| | |
|--------|---------------------|
| Wiring | |
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

For station 2 to 24 **SSQ1000-4** **1** **A-F-205**

| | |
|--------|---------------------|
| Wiring | |
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

Lead wire length

| Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) |
|-----------|------------------|------------|------------------|------------|------------------|------------|------------------|
| Station 2 | 165 | Station 8 | 245 | Station 14 | 320 | Station 20 | 400 |
| Station 3 | 175 | Station 9 | 260 | Station 15 | 335 | Station 21 | 405 |
| Station 4 | 190 | Station 10 | 280 | Station 16 | 350 | Station 22 | 420 |
| Station 5 | 205 | Station 11 | 290 | Station 17 | 365 | Station 23 | 435 |
| Station 6 | 215 | Station 12 | 300 | Station 18 | 375 | Station 24 | 450 |
| Station 7 | 230 | Station 13 | 310 | Station 19 | 385 | | |

(For P kit)

For station 1 **SSQ1000-4** **1** **B-P-150**

| | |
|--------|---------------------|
| Wiring | |
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

For station 2 to 24 **SSQ1000-4** **1** **A-P-200**

| | |
|--------|---------------------|
| Wiring | |
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

Lead wire length

| Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) |
|-----------|------------------|------------|------------------|------------|------------------|------------|------------------|
| Station 2 | 160 | Station 8 | 240 | Station 14 | 315 | Station 20 | 395 |
| Station 3 | 170 | Station 9 | 255 | Station 15 | 330 | Station 21 | 400 |
| Station 4 | 185 | Station 10 | 275 | Station 16 | 345 | Station 22 | 415 |
| Station 5 | 200 | Station 11 | 285 | Station 17 | 360 | Station 23 | 430 |
| Station 6 | 210 | Station 12 | 295 | Station 18 | 370 | Station 24 | 445 |
| Station 7 | 225 | Station 13 | 305 | Station 19 | 380 | | |

(For C kit)

AXT661-1 **3** **AL-**

| | |
|--------|---------------------|
| Wiring | |
| 3 | For double (3-wire) |
| 4 | For single (2-wire) |

| Lead wire length | |
|------------------|------------------|
| Symbol | L dimension (mm) |
| Nil | 300 |
| 6 | 600 |
| 10 | 1000 |
| 15 | 1500 |
| 20 | 2000 |
| 25 | 2500 |
| 30 | 3000 |
| 50 | 5000 |

<④ D side end plate assembly>

SSQ1000-3A-4

<⑤ U side end plate assembly>

SSQ1000-2A-4

<⑥ SUP/EXH block assembly>

SSQ1000-PR-4-C8

| | |
|-----------|------------------------------|
| Port size | |
| C6 | One-touch fitting for ø6 |
| C8 | One-touch fitting for ø8 |
| N7 | One-touch fitting for ø1/4" |
| N9 | One-touch fitting for ø5/16" |

| | |
|--------|-----------------------------------|
| Option | |
| Nil | Common exhaust type |
| R | External pilot |
| S | Built-in silencer, direct exhaust |

(Note) Enter "RS" for both options.

<⑦ Manifold block assembly>

SSQ1000-1A-4 Including gaskets ^⑫

| | |
|--------|-------------------------------|
| Option | |
| Nil | None |
| B | Back pressure check valve |
| R | External pilot specifications |

(Note) Enter "BR" for both options.

<⑧ Element>

SSQ1000-SE

(Note) Part number for a 10 piece set of elements. Refer to page 881 for replacement procedures.

<⑨ Port plug>

VVQZ2000-CP

<⑩ Fitting assembly>

(For P, R port)

VVQ1000-51A-C8

| | |
|-----------|------------------------------|
| Port size | |
| C6 | One-touch fitting for ø6 |
| C8 | One-touch fitting for ø8 |
| N7 | One-touch fitting for ø1/4" |
| N9 | One-touch fitting for ø5/16" |

(Note) Purchasing order is available in units of 10 pieces.

<⑪ Fitting assembly>

(For cylinder port)

VVQ1000-50A-C6

| | |
|-----------|------------------------------|
| Port size | |
| C3 | One-touch fitting for ø3.2 |
| C4 | One-touch fitting for ø4 |
| C6 | One-touch fitting for ø6 |
| M5 | M5 thread |
| N1 | One-touch fitting for ø1/8" |
| N3 | One-touch fitting for ø5/32" |
| N7 | One-touch fitting for ø1/4" |

(Note) Purchasing order is available in units of 10 pieces.

<⑫ Gasket and screw assembly>

SQ1000-GS


(Note) Part number for 10 pieces each of gaskets and screws.

- SV
- SYJ
- SZ
- VF
- VP4
- VQ 1/2
- VQ 4/5
- VQC 1/2
- VQC 4/5
- VQZ
- SQ
- VFS
- VFR
- VQ7

SQ2000 Series

Manifold Exploded View: SQ2000 (Plug Lead Type Manifold) SS5Q24

(F, P, C kit)

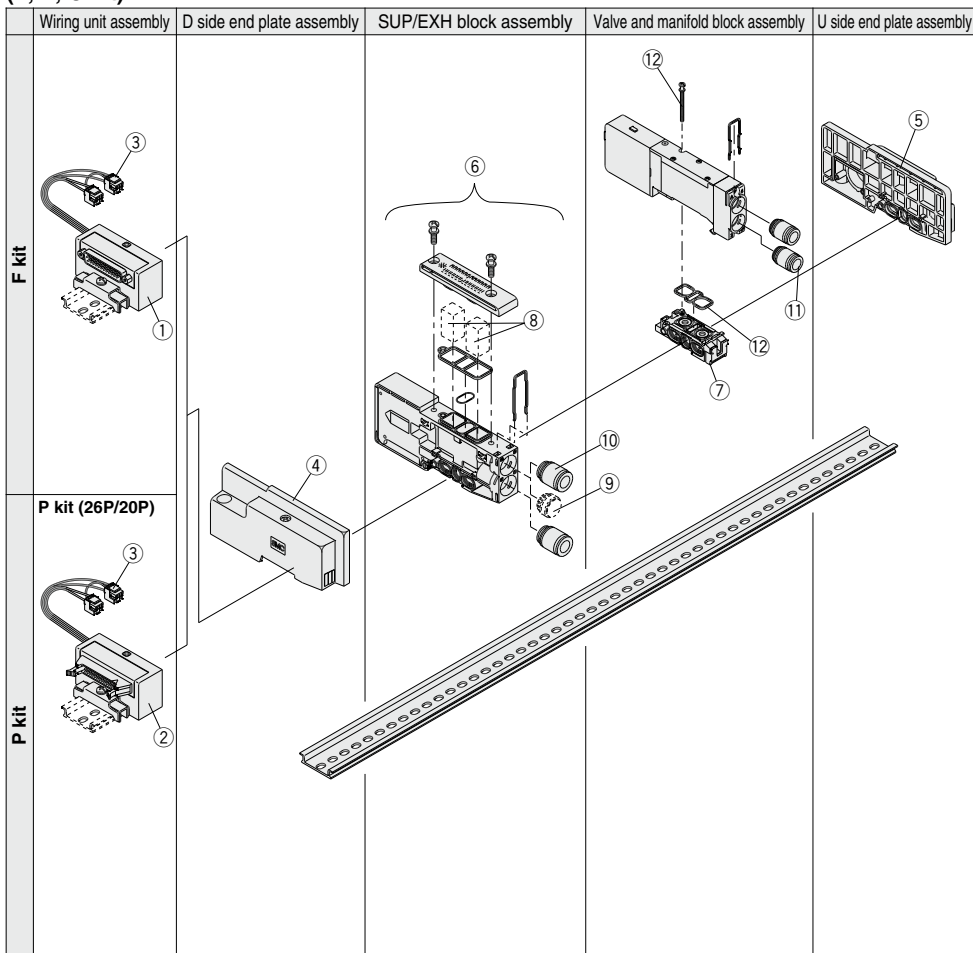

Manifold Spare Parts

Refer to pages 869 to 872 of "How to Increase Manifold Stations" regarding the mounting of each spare parts.

<① D-sub connector housing assembly>

AXT100 - 41 - FL25 - S 03

| Wiring | | Stations | |
|--------|---------------|----------|-----------------|
| S | Single wiring | 01 | For 1 station |
| D | Double wiring | : | : |
| | | 12 | For 12 stations |

<② Flat ribbon cable connector housing assembly>

AXT100 - 41 - PL26 PL20 - S 03

| Wiring | | Stations (Note) | | Note | |
|--------|---------------|-----------------|-----------------|-------|-----------------------|
| S | Single wiring | 01 | For 1 station | PL26: | 01 to 12 (P kit, 26P) |
| D | Double wiring | : | : | PL20: | 01 to 09 (P kit, 20P) |
| | | 12 | For 12 stations | | |

<③ Lead wire assembly>

(For F kit)

For station 1 **SSQ1000 - 4 1 B - F - 170**

| Wiring | |
|--------|---------------------|
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

For station 2 to 24 **SSQ1000 - 4 1 A - F - 230**

| Wiring | |
|--------|---------------------|
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

Lead wire length

| Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) |
|-----------|------------------|------------|------------------|------------|------------------|------------|------------------|
| Station 2 | 190 | Station 8 | 310 | Station 14 | 430 | Station 20 | 550 |
| Station 3 | 210 | Station 9 | 330 | Station 15 | 450 | Station 21 | 570 |
| Station 4 | 230 | Station 10 | 350 | Station 16 | 470 | Station 22 | 590 |
| Station 5 | 250 | Station 11 | 370 | Station 17 | 490 | Station 23 | 610 |
| Station 6 | 270 | Station 12 | 390 | Station 18 | 510 | Station 24 | 630 |
| Station 7 | 290 | Station 13 | 410 | Station 19 | 530 | | |

(For P kit)

For station 1 **SSQ1000 - 4 1 B - P - 170**

| Wiring | |
|--------|---------------------|
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

For station 2 to 24 **SSQ1000 - 4 1 A - P - 310**

| Wiring | |
|--------|---------------------|
| 0 | For single (2-wire) |
| 1 | For double (3-wire) |

Lead wire length

| Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) | Stations | L dimension (mm) |
|-----------|------------------|------------|------------------|------------|------------------|------------|------------------|
| Station 2 | 190 | Station 8 | 310 | Station 14 | 430 | Station 20 | 550 |
| Station 3 | 210 | Station 9 | 330 | Station 15 | 450 | Station 21 | 570 |
| Station 4 | 230 | Station 10 | 350 | Station 16 | 470 | Station 22 | 590 |
| Station 5 | 250 | Station 11 | 370 | Station 17 | 490 | Station 23 | 610 |
| Station 6 | 270 | Station 12 | 390 | Station 18 | 510 | Station 24 | 630 |
| Station 7 | 290 | Station 13 | 410 | Station 19 | 530 | | |

(For C kit)

AXT661 - 1 3 AL - 6

| Wiring | | Lead wire length | |
|--------|---------------------|------------------|------------------|
| 3 | For double (3-wire) | Symbol | L dimension (mm) |
| 4 | For single (2-wire) | Nil | 300 |
| | | 6 | 600 |
| | | 10 | 1000 |
| | | 15 | 1500 |
| | | 20 | 2000 |
| | | 25 | 2500 |
| | | 30 | 3000 |
| | | 50 | 5000 |

<④ D side end plate assembly>

SSQ2000 - 3A - 4

| Manifold mounting | |
|-------------------|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

<⑤ U side end plate assembly>

SSQ2000 - 2A - 4 - 1

| Manifold mounting | |
|-------------------|------------------------|
| Nil | DIN rail mounting type |
| E | Direct mounting type |

<⑥ SUP/EXH block assembly>

SSQ2000 - PR - 3 - C10 -

| Port size | | Option | |
|-----------|------------------------------|--------|-----------------------------------|
| C8 | One-touch fitting for ø8 | Nil | Common exhaust type |
| C10 | One-touch fitting for ø10 | R | External pilot |
| N9 | One-touch fitting for ø5/16" | S | Built-in silencer, direct exhaust |
| N11 | One-touch fitting for ø3/8" | | |

Note) Enter "-RS" for both options.

<⑦ Manifold block assembly>

SSQ2000 - 1A - 4 -

Including gaskets ⑫

| Option | |
|--------|-------------------------------|
| Nil | None |
| B | Back pressure check valve |
| R | External pilot specifications |

Note) Enter "-BR" for both options.

<⑧ Element>

SSQ2000 - SE

Note) Part number for a 10 piece set of elements. Refer to page 881 for replacement procedure.

<⑨ Port plug>

VVQZ3000 - CP

<⑩ Fitting assembly>

(For P, R port)

VVQ2000 - 51A - C10

Port size

| | |
|-----|------------------------------|
| C8 | One-touch fitting for ø8 |
| C10 | One-touch fitting for ø10 |
| N9 | One-touch fitting for ø5/16" |
| N11 | One-touch fitting for ø3/8" |

Note) Purchasing order is available in units of 10 pieces.

<⑪ Fitting assembly>

(For cylinder port)

VVQ1000 - 51A - C8

Port size

| | |
|----|------------------------------|
| C4 | One-touch fitting for ø4 |
| C6 | One-touch fitting for ø6 |
| C8 | One-touch fitting for ø8 |
| N3 | One-touch fitting for ø5/32" |
| N7 | One-touch fitting for ø1/4" |
| N9 | One-touch fitting for ø5/16" |

Note) Purchasing order is available in units of 10 pieces.

<⑫ Gasket and screw assembly>

SQ2000 - GS

Note) Part number for 10 pieces each of gaskets and screws.



SQ1000/2000 Series Specific Product Precautions 1

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Manual Override


⚠ Warning

Use to switch the main valve.


Push Type (Tool Required)

Push down on the manual override button with a small screwdriver until it stops.

SQ1000




SQ2000




Locking Type (Tool Required)

Push down completely on the manual override button with a small screwdriver. While down, turn clockwise 90° to lock it. Turn it counterclockwise to release it.

SQ1000





SQ2000



Slide Locking Type (Manual Type) (SQ2000 only)

The manual override is locked by sliding it all the way to the pilot valve side (ON side) with a small flat head screwdriver or finger. Slide it to the fitting side (OFF side) to release it. In addition, it can also be used as a push type by using a screwdriver, etc., of $\phi 2$ or less.

SQ2000




Light/Surge Voltage Suppressor

⚠ Caution


Indicator lights are all positioned on one side for both single solenoid and double solenoid types.

For double, 3 position, and 4 position dual 3 port types, 2 colors are used to indicate the energization of A side or B side.


SQ1000



SQ2000



● Single Solenoid Type (SQ1000/2000)

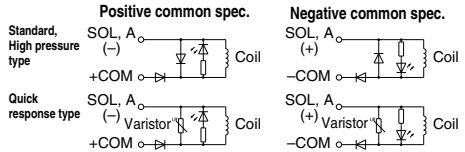


(Note) With quick response type, approximately -40 V of coil surge voltage is generated when the valve is switched OFF.

● Double Type (SQ1000/2000)

● 3 Position Type (SQ1000/2000)

● 4 Position Dual 3 Port Type (SQ1000/2000)

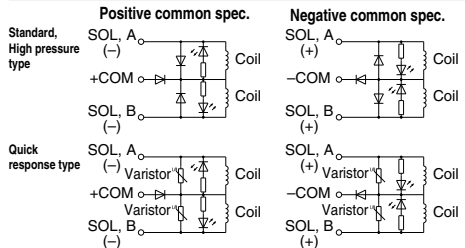

(Note) With quick response type, approximately -40 V of coil surge voltage is generated when the valve is switched OFF.

Continuous Duty

⚠ Caution

If a valve is energized continuously for a long period of time, the rise in temperature due to heat-up of the coil assembly may cause a decline in solenoid valve performance, reduce service life, or have adverse effects on peripheral equipment. When the valve is continuously energized, use the standard type (0.4 W) at ambient temperature of 40°C or less with proper heat radiation. In particular, if three or more adjacent stations on the manifold are energized simultaneously for extended periods of time or if the valves on A side and B side of the dual 3 port valve are energized simultaneously for a long period of time, take special care as the temperature rise will be greater.



SQ1000/2000 Series Specific Product Precautions 2

Be sure to read this before handling the products.

Refer to back page 50 for Safety Instructions and pages 3 to 9 for 3/4/5 Port Solenoid Valve Precautions.

Mounting and Removal of Valves


⚠ Caution

Mounting

- Insert the hook of the valve into the bracket on the manifold block, then push the valve down into place and tighten the mounting screw.
- Tighten the screw with the appropriate tightening torque shown below.

| | |
|---------------|------------------|
| SQ1000 | 0.17 to 0.23 N·m |
| SQ2000 | 0.25 to 0.35 N·m |

- When pushing the valve down, press it on the area near the manual override. Be careful not to push the solenoid cover.

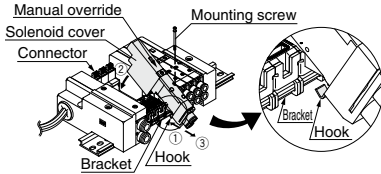

Removing

- Loosen the valve mounting screw, lift the valve from the solenoid cover side and remove it by sliding it in the direction of arrow ③.


If it is difficult to loosen the screw, loosen it while pressing the valve gently on the area near the manual override.

Mounting and Removal of Manifold with DIN Rail

⚠ Caution

Removing Manifold from DIN Rail


- ① Loosen the end plate clamping screws on both sides until they turn freely. (The screws do not come out.)
- ② Remove the manifold from the DIN rail by lifting it from the solenoid cover side.

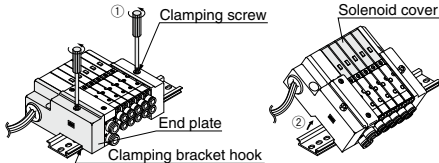

When a manifold contains a large number of stations and it is difficult to remove all at once, separate the manifold into several sections before removing it.

Mounting Manifold on DIN Rail

The procedure is the reverse of that above. After tightening the clamping screw on one side, push on the opposite end plate so that there are no gaps between the manifold blocks and then tighten the other clamping screw.

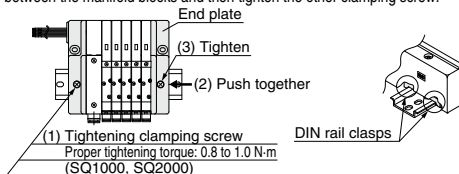

Confirm that the DIN rail clasps are securely hooked into the DIN rail.

Replacement of Cylinder Port Fittings

⚠ Caution


The cylinder port fittings are a cassette for easy replacement. Fittings are secured with a clip that is inserted from the top side of the valve. Remove the clip with a flat head screwdriver, etc., to replace the fittings. To mount a fitting, insert the fitting assembly until it stops and insert the clip to its designated position.

| Applicable tubing O.D. (mm) | Fitting assembly part no. | |
|-----------------------------|---------------------------|----------------|
| | SQ1000 | SQ2000 |
| 3.2 | VVQ1000-50A-C3 | — |
| 4 | VVQ1000-50A-C4 | VVQ1000-51A-C4 |
| 6 | VVQ1000-50A-C6 | VVQ1000-51A-C6 |
| 8 | — | VVQ1000-51A-C8 |

* Part numbers above are for one fitting; however, order them in 10 piece units.

⚠ Caution

Use caution that O-rings must be free from scratches and dust. Otherwise, air leakage may result.



Built-in Silencer Replacement Element

⚠ Caution


A filter element is built into the manifold base end plate. When the element becomes dirty and clogged, this will cause trouble such as a drop in the cylinder speed, etc. Therefore, replace the element regularly.

Element part no.

| Type | Element part no. | |
|---------------------------------------|------------------|------------|
| | SQ1000 | SQ2000 |
| Built-in silencer direct exhaust (-S) | SSQ1000-SE | SSQ2000-SE |

* Part numbers above are for a set of ten elements.

To replace an element, remove the cover on the top side of the end plate and remove the old element with a flat head screwdriver, etc.

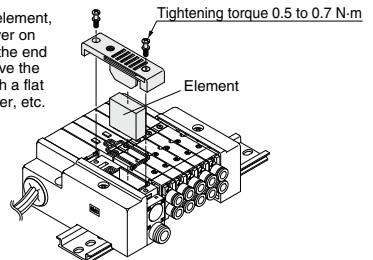

How to Calculate the Flow Rate

For obtaining the flow rate, refer to front matter.

■ Trademark

DeviceNet™ is a trademark of ODVA.